

AUDIO-VIDEO STEREO RECEIVER


KR-694/V5560/V6060

SERVICE MANUAL

KENWOOD

© 1994-1 PRINTED IN JAPAN
B51-4842-00(S) 3457

KR-V5560(KR-694 same as KR-V5560 without Model name.)

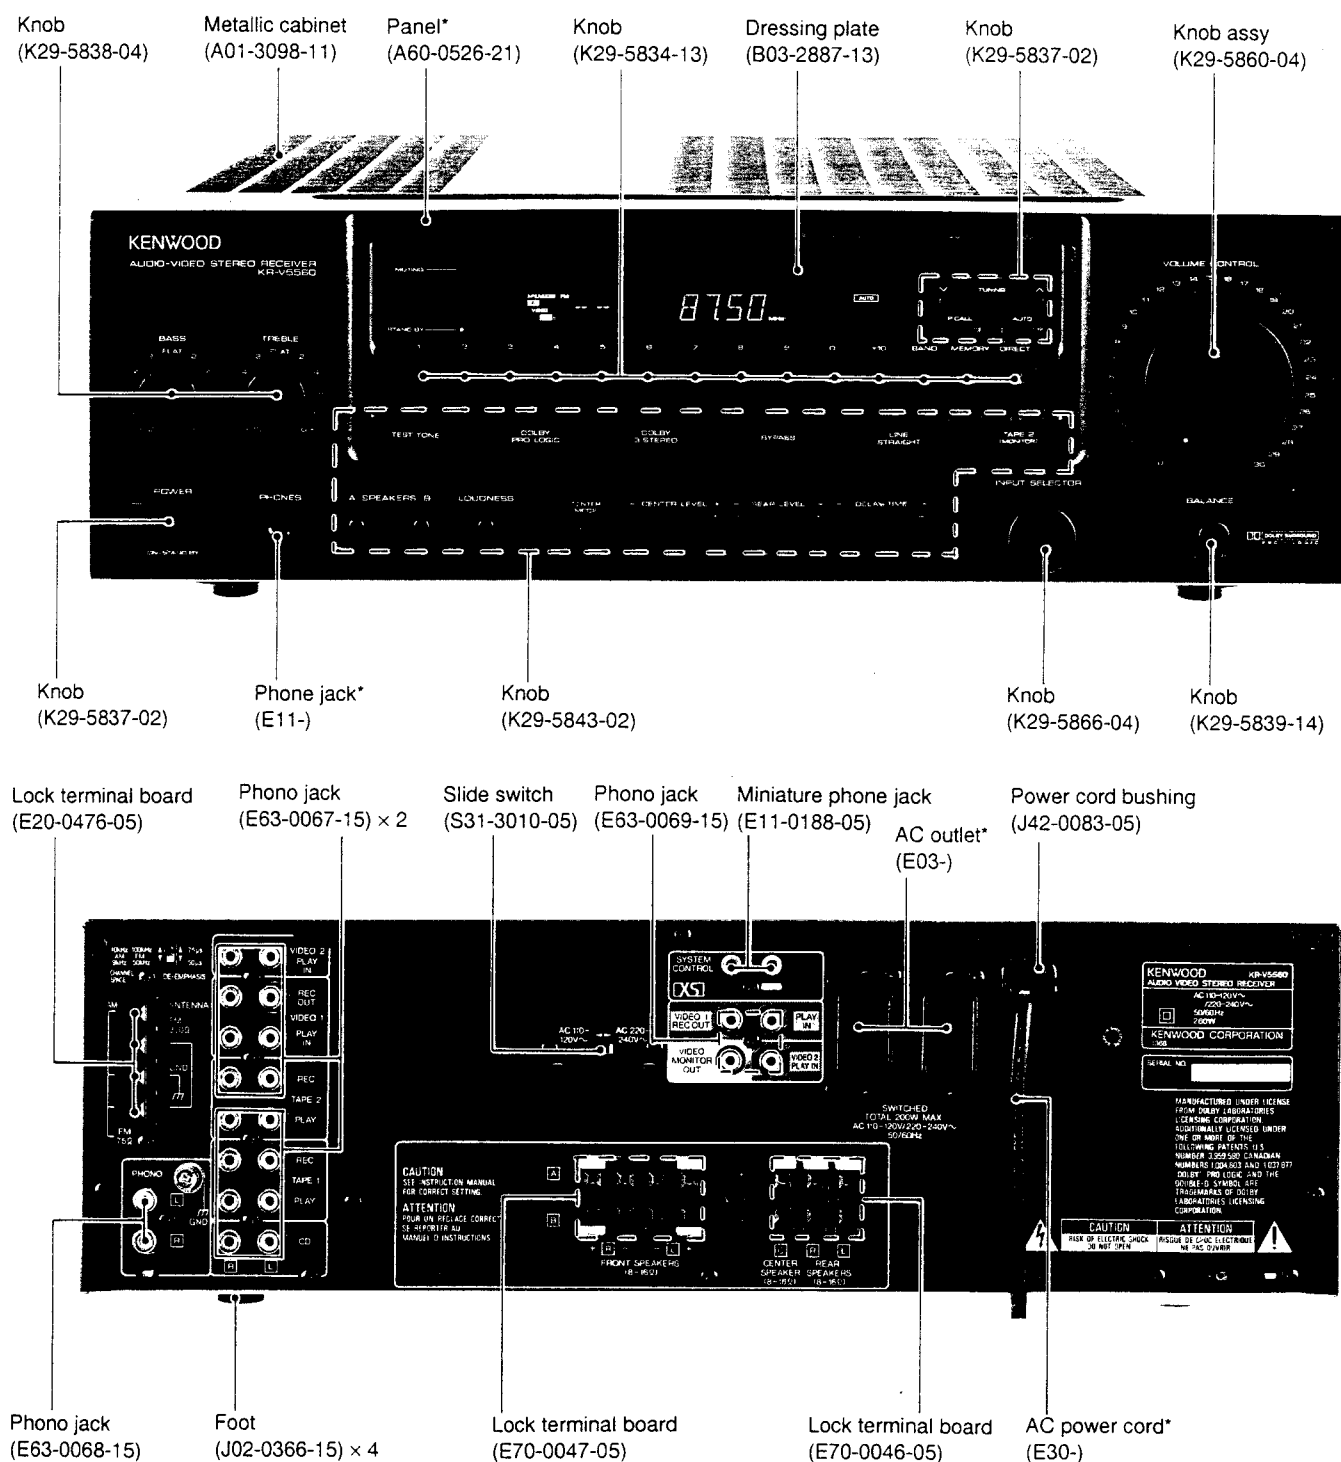

*Refer to parts list on page 51.


KR-694/V5560/V6060

CONTENTS


ACCESSORIES	2	WIRING DIAGRAM	23
REMOTE CONTROL UNIT	5	PC BOARD(Component side view)	25
DISASSEMBLY FOR REPAIR	8	SCHEMATIC DIAGRAM	33
BLOCK DIAGRAM	9	EXPLODED VIEW	49
CIRCUIT DESCRIPTION	11	PARTS LIST	51
ADJUSTMENT	20	SPECIFICATIONS	62

ACCESSORIES


FM indoor antenna(1)
(T90-0175-05)




AC plug adaptor(1)
(E03-0115-05):M




Remote control unit(1)
[KR-694,V5560]
A60-0964-05
BATTERY COVER : A09-0170-08




AM loop antenna Assy.....(1)
(T90-0195-05)




Batteries (R6/AA)(2)



Antenna adaptor(75Ω/300Ω)
..... (1)
(T90-0185-05):E,T




[KR-V6060]
A70-0962-05 : K,P,Y,M,R
A70-0963-05 : E,T
BATTERY COVER : A09-0146-08



Loop antenna stand
(J19-3645-05)

KR-694/V5560/V6060


KR-V6060 M type (Except E,T type)

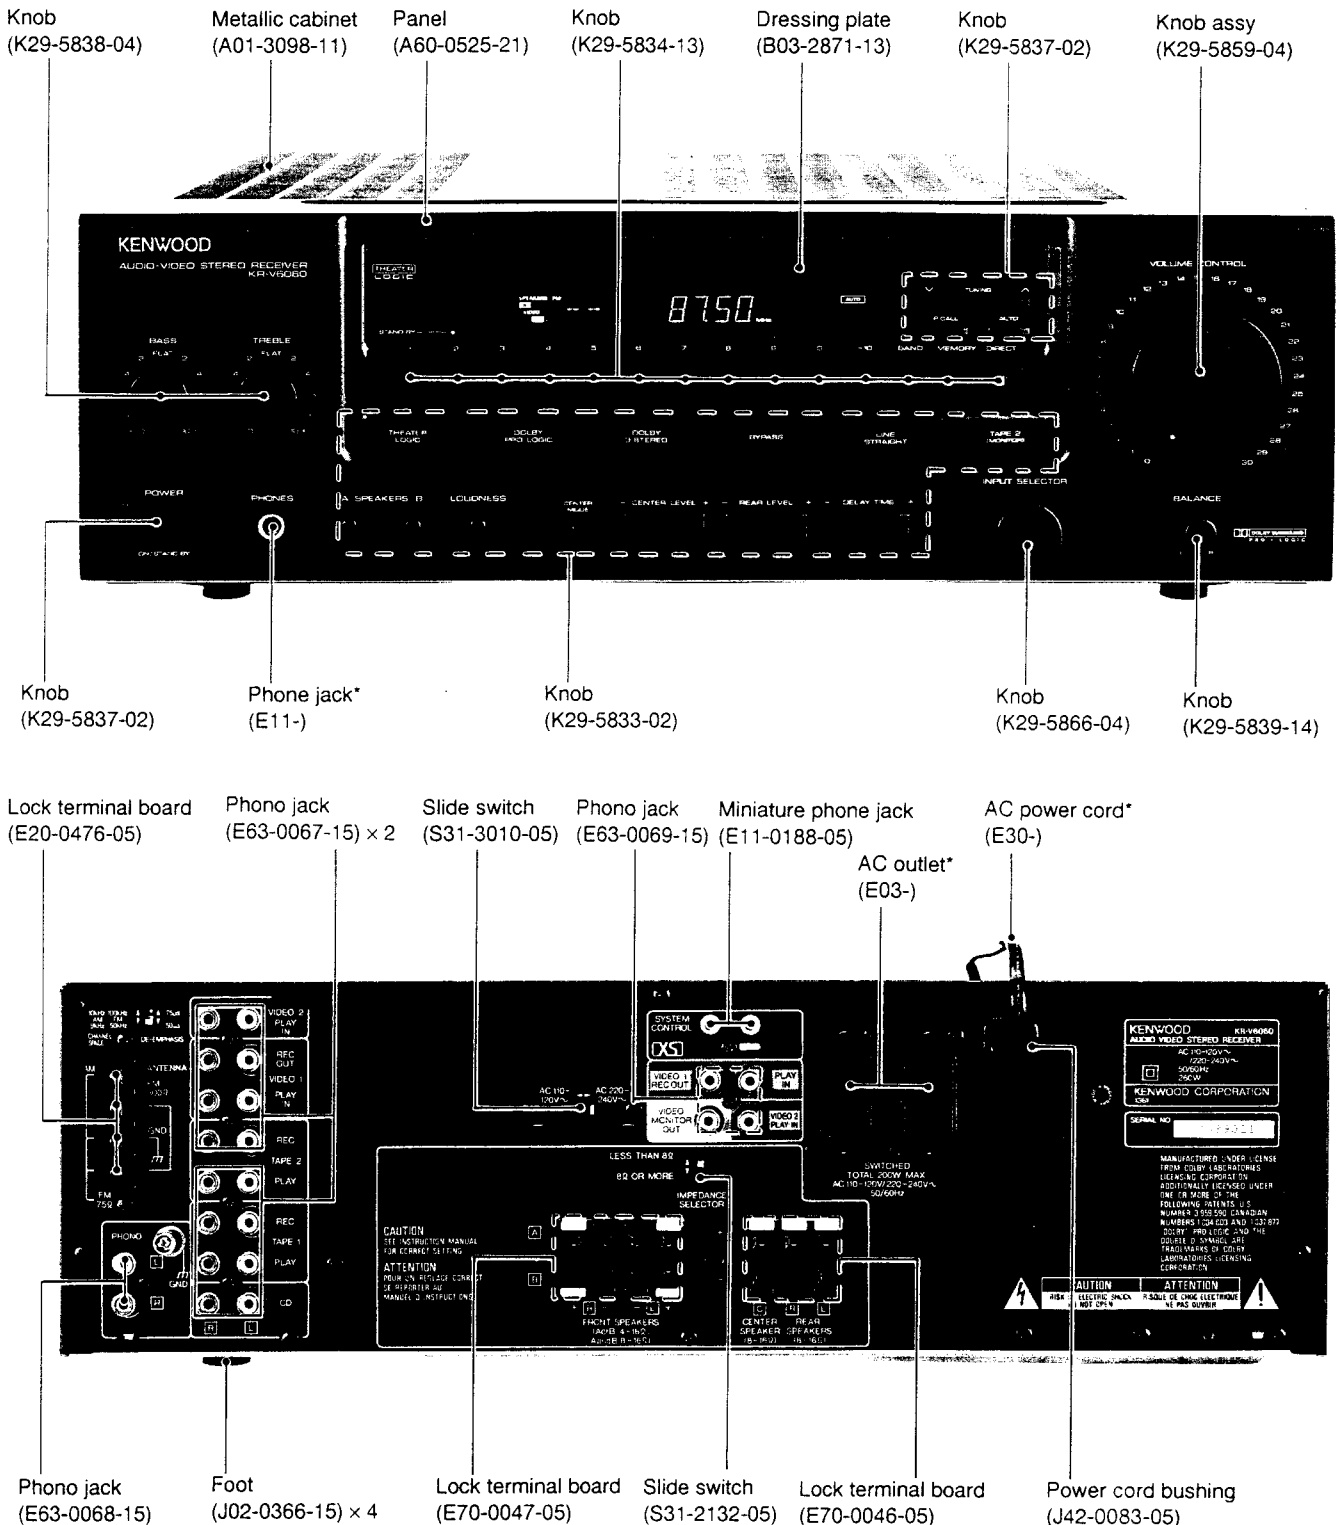

*Refer to parts list on page 51.

KR-694/V5560/V6060

KR-V6060(E,T Type)

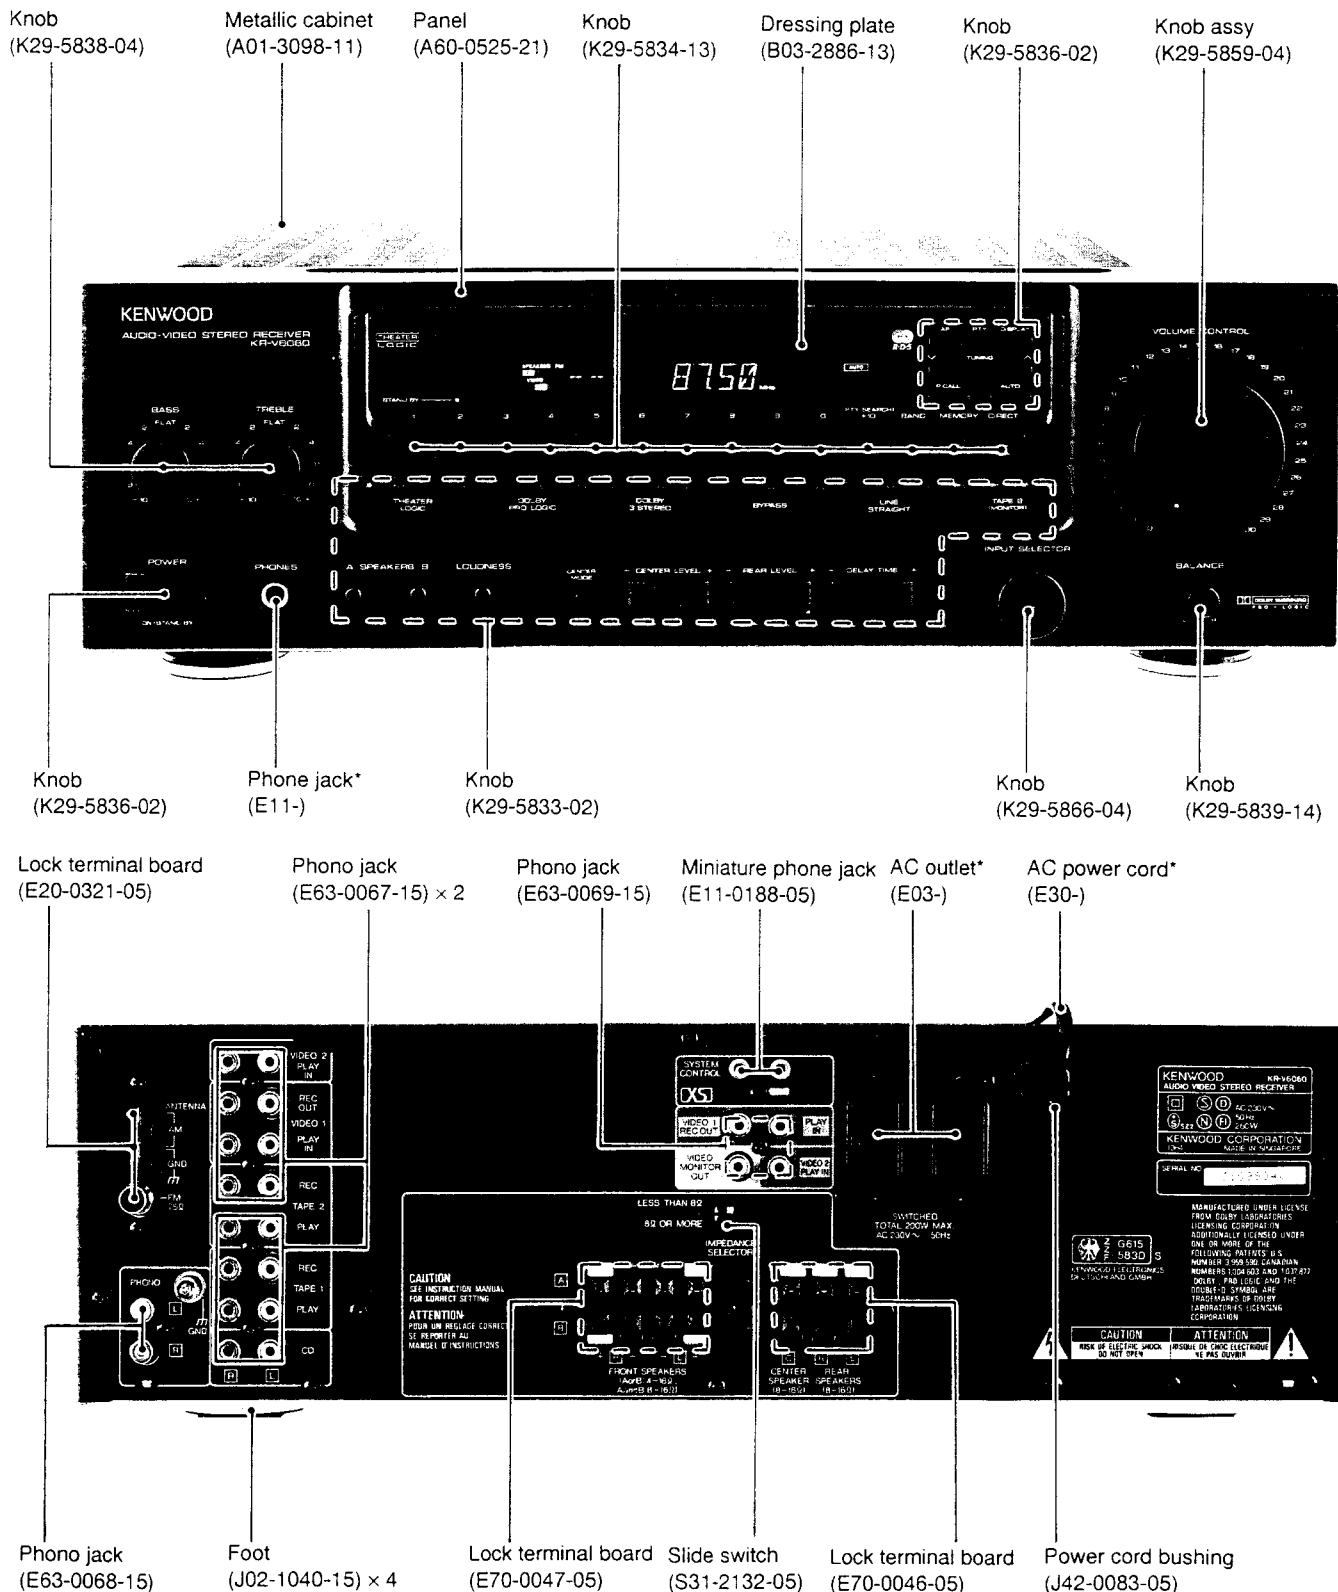

*Refer to parts list on page 51.

KR-694/V5560/V6060

REMOTE CONTROL UNIT

KR-694/V5560

TUNER operation keys

BAND Selects the broadcast band.
P.CALL Recalls preset stations.

CD player operation keys

DISC This key is used as the disc selector of a multi-CD player. Each press selects a different disc.

INPUT key

Selects the input sources.

TAPE 2 (MONITOR) key

Press to monitor the source being recorded.

POWER key

MUTE key

Mutes the sound temporarily.

VOLUME keys

Adjust the listening volume. The VOLUME CONTROL knob of the main unit turns when these keys are operated.

Cassette deck operation keys

These keys are used to operate TAPE A and TAPE B decks.

REC/ARM key

When recording on TAPE B, puts the deck in record-pause mode after leaving a non-recorded blank of 4 seconds.

Graphic equalizer operation keys

EFFECT Turns the graphic equalizer ON and OFF.

M.CALL Recalls the preset equalizer curves from memory.

SURROUND keys

SURROUND MODE

Switches the surround modes.

TEST TONE

Switches the test tone ON and OFF.

CENTER + MULTI LEVEL CONTROL


This combination adjusts the center level.

REAR + MULTI LEVEL CONTROL

Adjusts the rear level.

DELAY + MULTI LEVEL CONTROL


Adjusts the delay time.

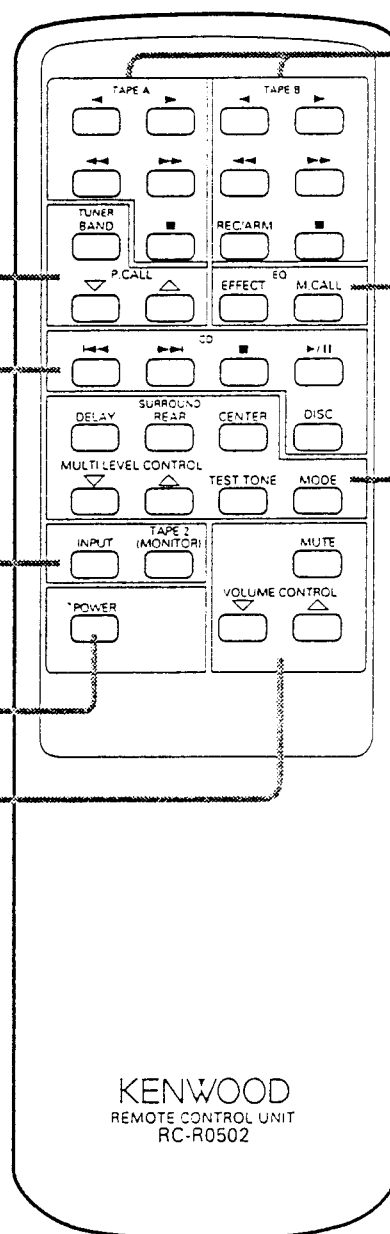

KR-694/V5560/V6060

REMOTE CONTROL UNIT

KR-V6060 (Except E,T type)

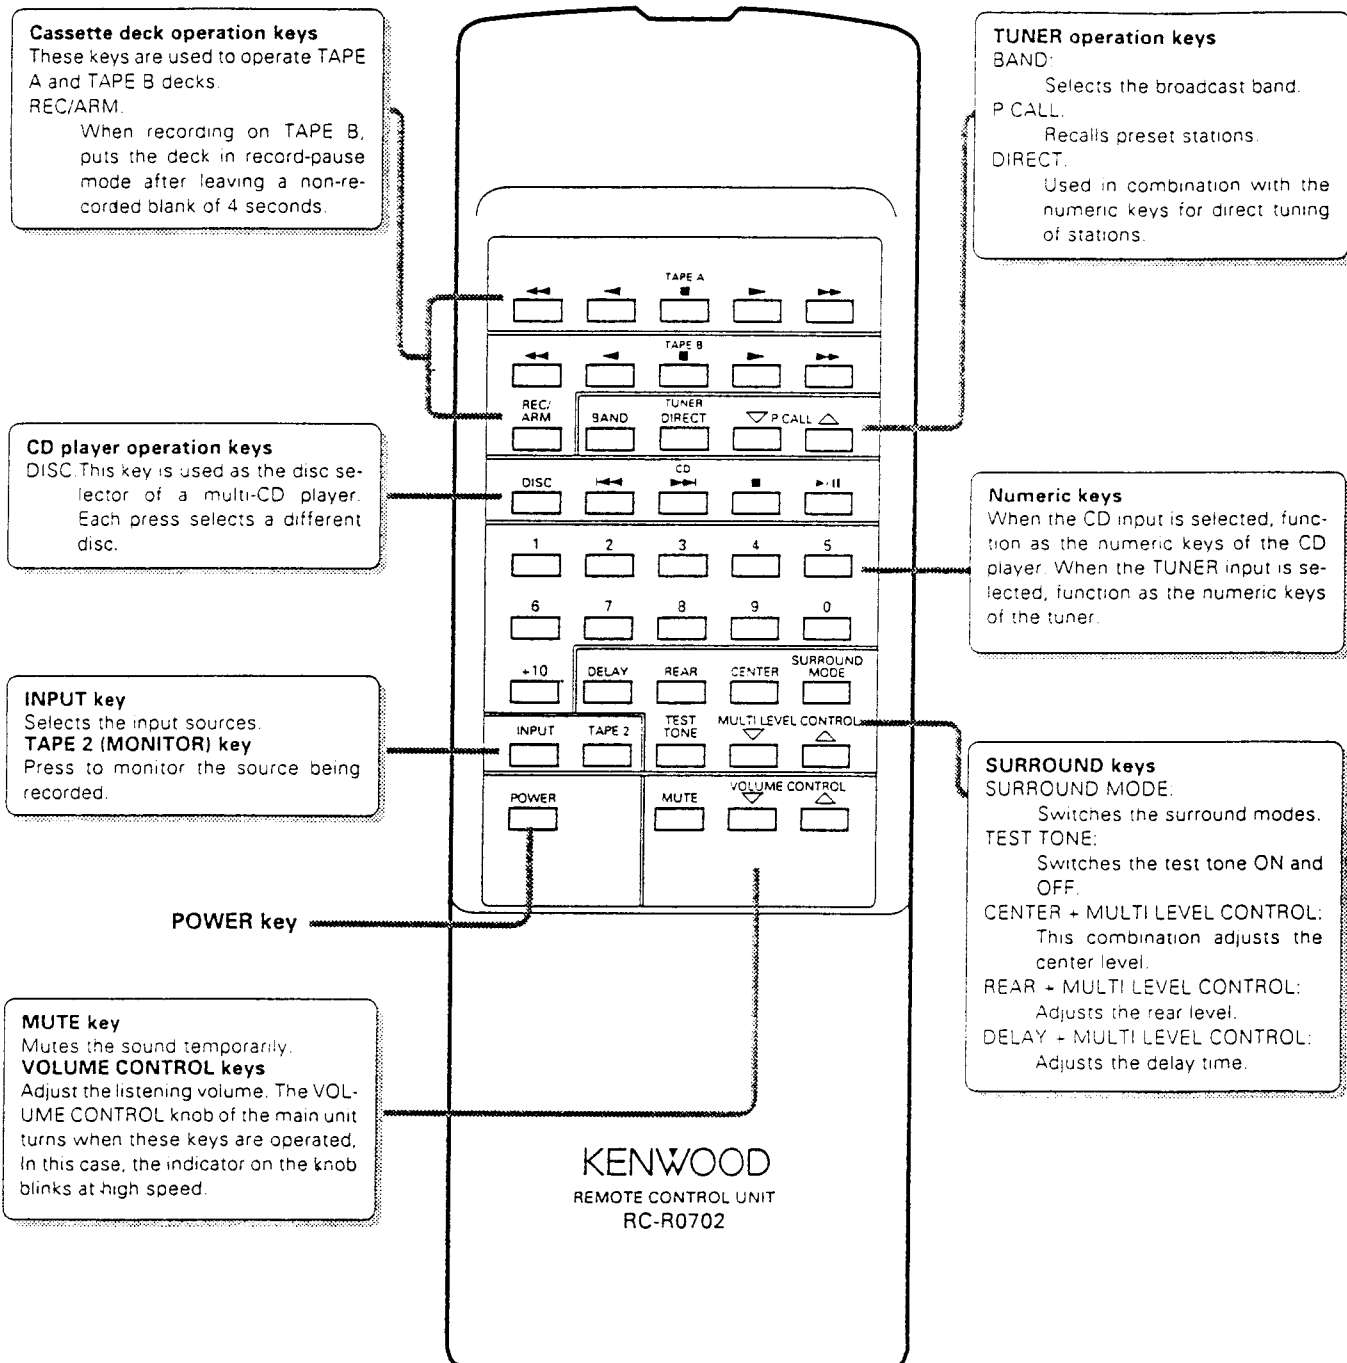

KR-694/V5560/V6060

REMOT CONTROL UNIT

KR-V6060 (E,T type)

Graphic equalizer operation keys

EFFECT:

Turns the graphic equalizer ON and OFF.

M.CALL:

Recalls the preset equalizer curves from memory.

CD player operation keys

DISC: This key is used as the disc selector of a multi-CD player. Each press selects a different disc.

SURROUND keys

SURROUND MEMORY:

Surround play data can be registered under these keys.

SURROUND MODE:

Switches the surround modes.

TEST TONE:

Switches the test tone ON and OFF.

CENTER + MULTI LEVEL CONTROL:

This combination adjusts the center level.

REAR + MULTI LEVEL CONTROL:

Adjusts the rear level.

DELAY + MULTI LEVEL CONTROL:

Adjusts the delay time.

Cassette deck operation keys

These keys are used to operate TAPE A and TAPE B decks.

REC/ARM key

When recording on TAPE B, puts the deck in record-pause mode after leaving a non-recorded blank of 4 seconds.

TUNER operation keys

BAND

Selects the broadcast band.

P.CALL:

Recalls preset stations.

DIRECT:

Used in combination with the numeric keys for direct tuning of stations.

PTY/AF/DISPLAY:

Used in reception of RDS broadcasting.

Numeric keys

When the CD input is selected, function as the numeric keys of the CD player. When the TUNER input is selected, function as the numeric keys of the tuner.

MUTE key

Mutes the sound temporarily.

VOLUME CONTROL keys

Adjust the listening volume. The VOLUME CONTROL knob of the main unit turns when these keys are operated. In this case, the indicator on the knob blinks at high speed.


INPUT key

Selects the input sources.

TAPE 2 (MONITOR) key

Press to monitor the source being recorded.

POWER key

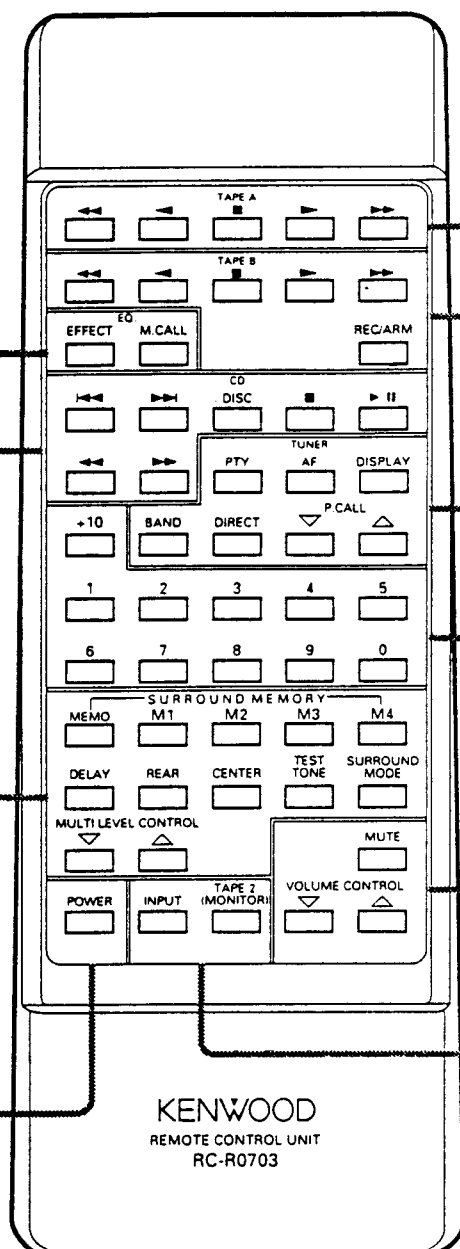


KR-694/V5560/V6060

DISASSEMBLY FOR REPAIR

Remove the upper case in advance.

1. How to remove the front panel

Remove the four screws (❶) at the bottom of the front panel and the volume knob and nut. Remove the panel forward while removing the Balance knob (❷) the left and right tabs (❸).

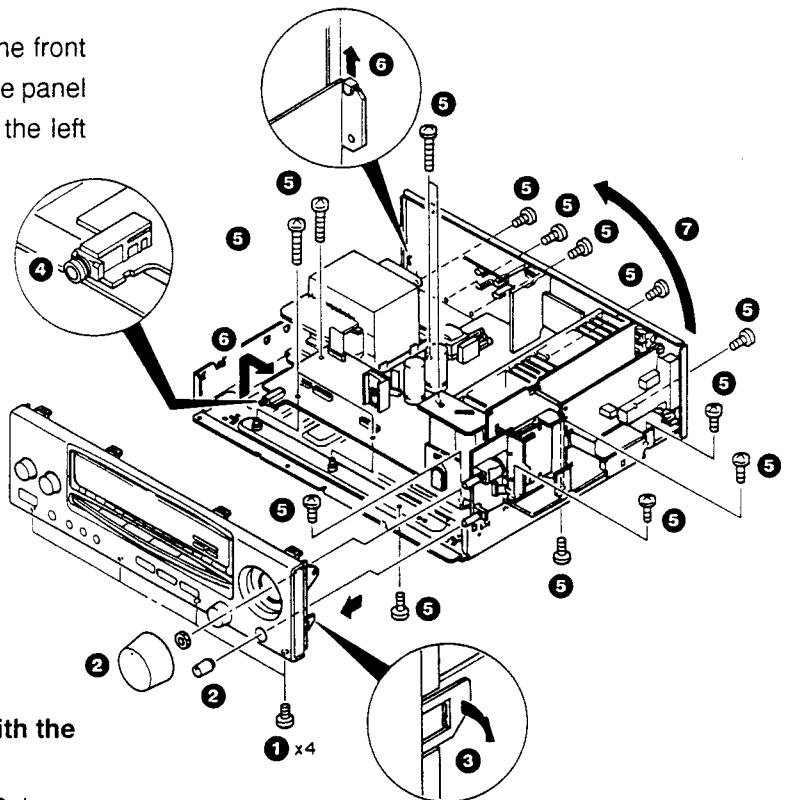


2. How to remove the main circuit board (with the front panel attached)


Remove the Volume knob and nut, and the Balance knob (❷). Next remove the 16 screws (❸) and remove the main PCB from the main chassis.

When removing, lift up the main PCB, move it right, lift it up in direction (❷) while being careful not to contact the transformer PCB, and stand it up as shown in the diagram below.

If the main PCB is unstable, insert a spacer (❸) as needed near the PHONES jack.

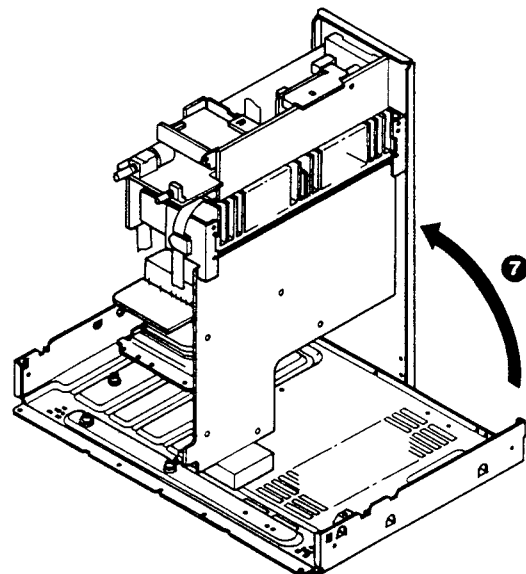

KR-694/V5560/V6060



KR-694/V5560/V6060

CIRCUIT DESCRIPTION

1. Function description

TUNER

	KR-694	KR-V5560	KR-V6060	KR-V7060	KR-V8060
20 ch RANDOM PRESET	○	○	○	○	○
Tuning control by IF count	○	○	○	○	○
Direct selection	○	○	○	○	○
RDS function (E, T type only)			○	○	

○: FUNCTION NO mark: NO FUNCTION

AMP


		KR-694	KR-V5560	KR-V6060	KR-V7060	KR-V8060
① INPUT SELECTOR TAPE 2 ON TAPE 2 OFF <div><div>CD TUNER PHONO TAPE 1 VIDEO 1 VIDEO 2</div></div>		<div>○</div>	<div>○</div>	<div>○</div>	<div>○</div>	<div>○</div>
② VIDEO SELECTOR VIDEO 1 VIDEO 2		<div>○</div>	<div>○</div>	<div>○</div>	<div>○</div>	<div>○</div>
③ LINE STRAIGHT		<div>○</div>	<div>○</div>	<div>○</div>	<div>○</div>	
④ S U R R O U N D M O D E	PRO LOGIC(NOR, WIDE, PHANTOM) 3 STEREO	<div>○</div>	<div>○</div>	<div>○</div>	<div>○</div>	<div>○</div>
	THEATER LOGIC			<div>○</div>	<div>○</div>	
	DSP LOGIC DSP <div><div>ARENA, JAZZ CLUB STADIUM</div></div>					<div>○</div>
⑤ SURROUND MEMORY (M1 ~ M4) SURROUND MODE CENTER MODE DELAY TIME CENTER LEVEL				<div>○ (E, T type only)</div>	<div>○ (E, T type only)</div>	
⑥ SPEAKER A/B SELECT		<div>○</div>	<div>○</div>	<div>○</div>	<div>○</div>	<div>○</div>
⑦ IMPEADANC SELECTOR (4/8Ω)				<div>○ (AUTO)</div>	<div>○ (MANUAL)</div>	<div>○ (MANUAL)</div>

KR-694/V5560/V6060


CIRCUIT DESCRIPTION

*⑦ INPEDANCE SELECTOR (4/8 Ω)

AUTO(KR-V6060)

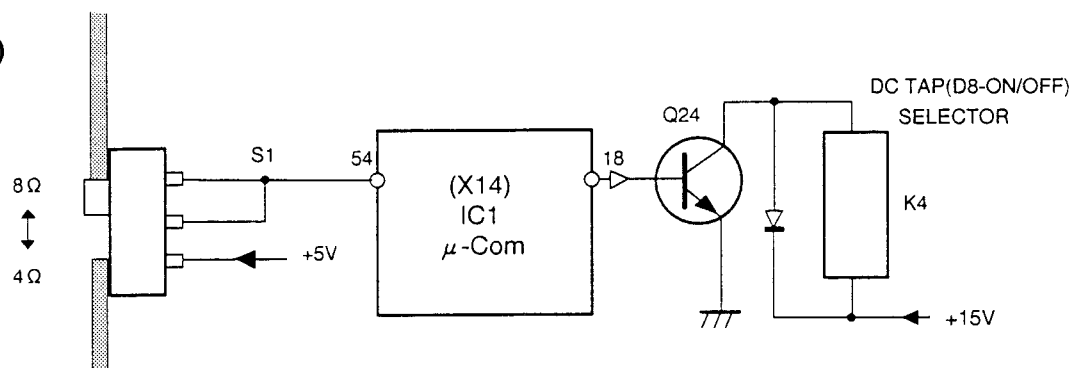

MANUAL(KR-V7060)
(KR-V8060)

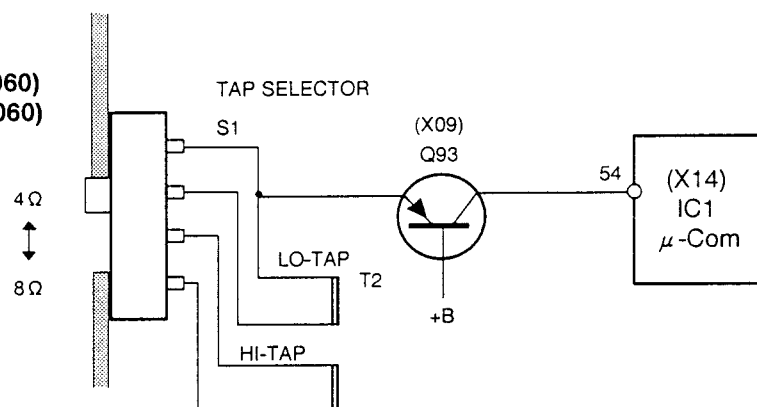

AUTO (KR-V6060 only)

Speaker IMPEDANCE SELECTOR

Set the IMPEDANCE SELECTOR switch on the rear panel according to the impedance of the front speakers used. The center and rear speakers should have impedances from 8 to 16 ohms regardless of the position of this switch.

For surround play		For non-surround play	
Front speaker impedance	Selector position	Front speaker impedance	Selector position
A or B speakers 4 Ω ~ 6 Ω	LESS THAN 8 Ω 8 Ω OR MORE ↑↓ IMPEDANCE SELECTOR	A or B speakers 4 Ω ~ 6 Ω	LESS THAN 8 Ω 8 Ω OR MORE ↑↓ IMPEDANCE SELECTOR
A or B speakers 8 Ω ~ 16 Ω	LESS THAN 8 Ω 8 Ω OR MORE ↑↓ IMPEDANCE SELECTOR	A or B speakers 8 Ω ~ 16 Ω A and B speakers 8 Ω ~ 16 Ω	LESS THAN 8 Ω 8 Ω OR MORE ↑↓ IMPEDANCE SELECTOR

- It is not possible to use both A and B speaker systems for surround play.
- It is not possible to use both A and B speaker systems if speakers have impedances from 4 ohms to 6 ohms.

KR-694/V5560/V6060

CIRCUIT DESCRIPTION

2. Conditions according to the destination and model

TUNER

Destination	DIODE SW			BAND	Receiving Remarks	Channel Space	IF	Reference Frequency
	DSW2 D33	DSW1 D34	DSW0 D35					
K1 (1700)	0	0	0	FM	87.5 MHz ~ 108.0 MHz	100 kHz	+ 10.7 MHz	50 kHz
				AM	530 kHz ~ 1700 kHz	10 kHz	+ 450 kHz	10 kHz
K2 (1610)	0	0	1	FM	87.5 MHz ~ 108.0 MHz	100 kHz	+ 10.7 MHz	50 kHz
				AM	530 kHz ~ 1610 kHz	10 kHz	+ 450 kHz	10 kHz
E1	0	1	1	FM	87.5 MHz ~ 108.0 MHz	50 kHz	+ 10.7 MHz	50 kHz
				AM	531 kHz ~ 1602 kHz	9 kHz	+ 450 kHz	9 kHz
E3 (RDS)	1	0	1	FM	87.5 MHz ~ 108.0 MHz	50 kHz	+ 10.7 MHz	50 kHz
				AM	531 kHz ~ 1602 kHz	9 kHz	+ 450 kHz	9 kHz
M	0	X	1	K2/E1 changes by only setting "DSW1". (DSW1 = 0: K2 Type, 1: E1 type)				

* DIODE SW (DSWX): 0 = Without DIODE (when static, input LOW)
 1 = With DIODE (when static, input HIGH)
 X = TRANSISTOR SW (0 = OFF 1 = ON)

AMP

MODEL	DIODE SW	DSW 4	DSW 3	Surround function	IMPEDANCE SELECTOR (4/8Ω)
	Ref. No.	D31	D32		
KR-694/V5560		0	0	PRO-LOGIC, 3 STEREO	AUTO MANUAL MANUAL
KR-V6060		0	1	PRO-LOGIC, 3 STEREO, THEATER LOGIC	
KR-V7060		1	0	PRO-LOGIC, 3 STEREO, THEATER LOGIC	
KR-V8060		1	1	PRO-LOGIC, 3 STEREO, DSP LOGIC, DSP.	

0: NO DIODE 1: ADD DIODE

KR-694/V5560/V6060

CIRCUIT DESCRIPTION

3. Function initial setting

① POWER OFF

② AMP system

- AUDIO SELECTOR TUNER
- IMAGE SELECTOR VIDEO 1
- SPEAKER A ON
- SPEAKER B OFF
- TAPE 2 MONITOR OFF
- LINE STRAIGHT OFF
- LOUDNESS OFF

③ TUNER system

- BAND FM
- FREQUENCY Lower limit of FM
(87.5 MHz)
- TUNING MODE AUTO TUNING
(AUTO STEREO)
- P. CH DISPLAY —ch

④ SURROUND system

- MODE BYPASS (OFF)
- CENTER LEVEL 0 dB
- REAR LEVEL 0 dB
- PROLOGIC MODE NORMAL
- 3 STEREO MODE NORMAL
- DSP MODE ARENA
- PRESENCE LEVEL:
 - DSP -0 dB
 - DSP LOGIC (KR-V8060 ONLY) -0 dB
 - THEATER LOGIC -4 dB
- DELAY TIME:
 - DOLBY PROLOGIC 20 ms
 - DSP 30 ms
 - DSP LOGIC (KR-V8060 ONLY) 40 ms
 - THEATER LOGIC 30 ms

⑤ TEST PRESET FREQUENCY

	K1 TYPE	K2 TYPE	E TYPE
01 ch	FM 98.00 MHz	FM 98.00 MHz	FM 98.00 MHz
02 ch	FM 108.00 MHz	FM 108.00 MHz	FM 108.00 MHz
03 ch	AM 630 kHz	AM 630 kHz	AM 630 kHz
04 ch	AM 990 kHz	AM 990 kHz	AM 990 kHz
05 ch	AM 1440 kHz	AM 1440 kHz	AM 1440 kHz
06 ch	AM 1610 kHz	AM 1610 kHz	AM 1602 kHz
07 ch	AM 1700 kHz	FM 87.50 MHz	FM 87.50 MHz
08 ch	FM 87.50 MHz	FM 87.50 MHz	FM 87.50 MHz
09 ch	FM 87.50 MHz	FM 87.50 MHz	FM 87.50 MHz
10 ch	FM 89.10 MHz	FM 89.10 MHz	FM 89.10 MHz
11 ch	FM 87.50 MHz	FM 87.50 MHz	FM 87.50 MHz
12 ch	FM 90.00 MHz	FM 90.00 MHz	FM 90.00 MHz
13 ch	FM 106.00 MHz	FM 106.00 MHz	FM 106.00 MHz
14 ch	AM 530 kHz	AM 530 kHz	AM 531 kHz
15 ch	FM 87.50 MHz	FM 87.50 MHz	FM 87.50 MHz
16 ch	FM 87.50 MHz	FM 87.50 MHz	FM 87.50 MHz
17 ch	FM 87.50 MHz	FM 87.50 MHz	FM 87.50 MHz
18 ch	FM 87.50 MHz	FM 87.50 MHz	FM 87.50 MHz
19 ch	FM 87.50 MHz	FM 87.50 MHz	FM 87.50 MHz
20 ch	FM 87.50 MHz	FM 87.50 MHz	FM 87.50 MHz

The initial setting is performed in a following event:

1. When backup memory data is destroyed when reset is applied to the microprocessor.
2. When the power cord is plugged in to the AC wall outlet while pressing the POWER key.

KR-694/V5560/V6060

CIRCUIT DESCRIPTION

4. TEST MODE

Setting method

Plug the power cord in the AC electrical outlet while depressing the "TUNING DOWN" key.

Cancellation method

Unplug the power cord from the AC electrical outlet.

Contents

① Starting the main unit test mode

When plug the power cord in the outlet while depressing the "TUNING DOWN" key, the test mode is entered which uses the main unit keys. At this time the following three actions occur:

- The power comes ON automatically.
- The fluorescent display and all LEDs illuminate.
- All conditions except POWER ON/OFF are initialized.

The all-illuminated state is cleared by pressing any main unit key. Also, any conditions changed during test mode are reinitialized when the test mode is cleared (by turning the AC power supply OFF).

② Automatic motor VR UP/DOWN (AMP)

Operating the "TAPE 2" key actuates the motor VR as follows: 16 seconds UP → 16 seconds DOWN → STOP. Accordingly, "TAPE 2 MONITOR" switching cannot be done during the main unit test mode.

③ Mute signal output (AMP)

No Selector MUTE (MUTE 1) control regulation is done whatsoever.

④ 0 ~ 9, + 10 testmode (TUNER)

- When the + 10 key is not operated, channels 1 through 9 (1 ~ 9 keys) and channel 10 (0 key) can be called.
- When the + 10 key is operated once, channels 11 through 19 (1 ~ 9 keys) and channel 20 (0 key) can be called.
- When the + 10 key is operated once more, the condition returns to that of a) above: "when the + 10 key is not operated."

⑤ Operations that can only be done by remote control

- AMP system: NONE
- TUNER system: NONE
- SURROUND system

"P. CH CALL" key: Same operation as the "CENTER MODE" key.

"DIRECT" key: Same operation as "TEST TONE" key.

- Naturally enough, "P. CH CALL" "DIRECT" operation cannot be carried out.

⑥ During the test mode, because there is no 4/8 switching input status display, the fluorescent "SPEAKERS" display is substituted instead.

(4/8 = Light on/Light off) As a result, please be careful concerning illumination of "SPEAKERS" during the test mode.

⑦ Cancelling the main unit test mode

When the power cord unplug in the AC outlet during the main unit test mode, the test mode is cancelled and the initial condition restored.

KR-694/V5560/V6060


CIRCUIT DESCRIPTION

5. Microprocessor : μ PD78043GF/ μ PD78044GF (X14 : IC1)

① Microprocessor periphery block diagram

μ PD78043GF [K,P,M,X,Y type]

μ PD78044GF [E,T type]

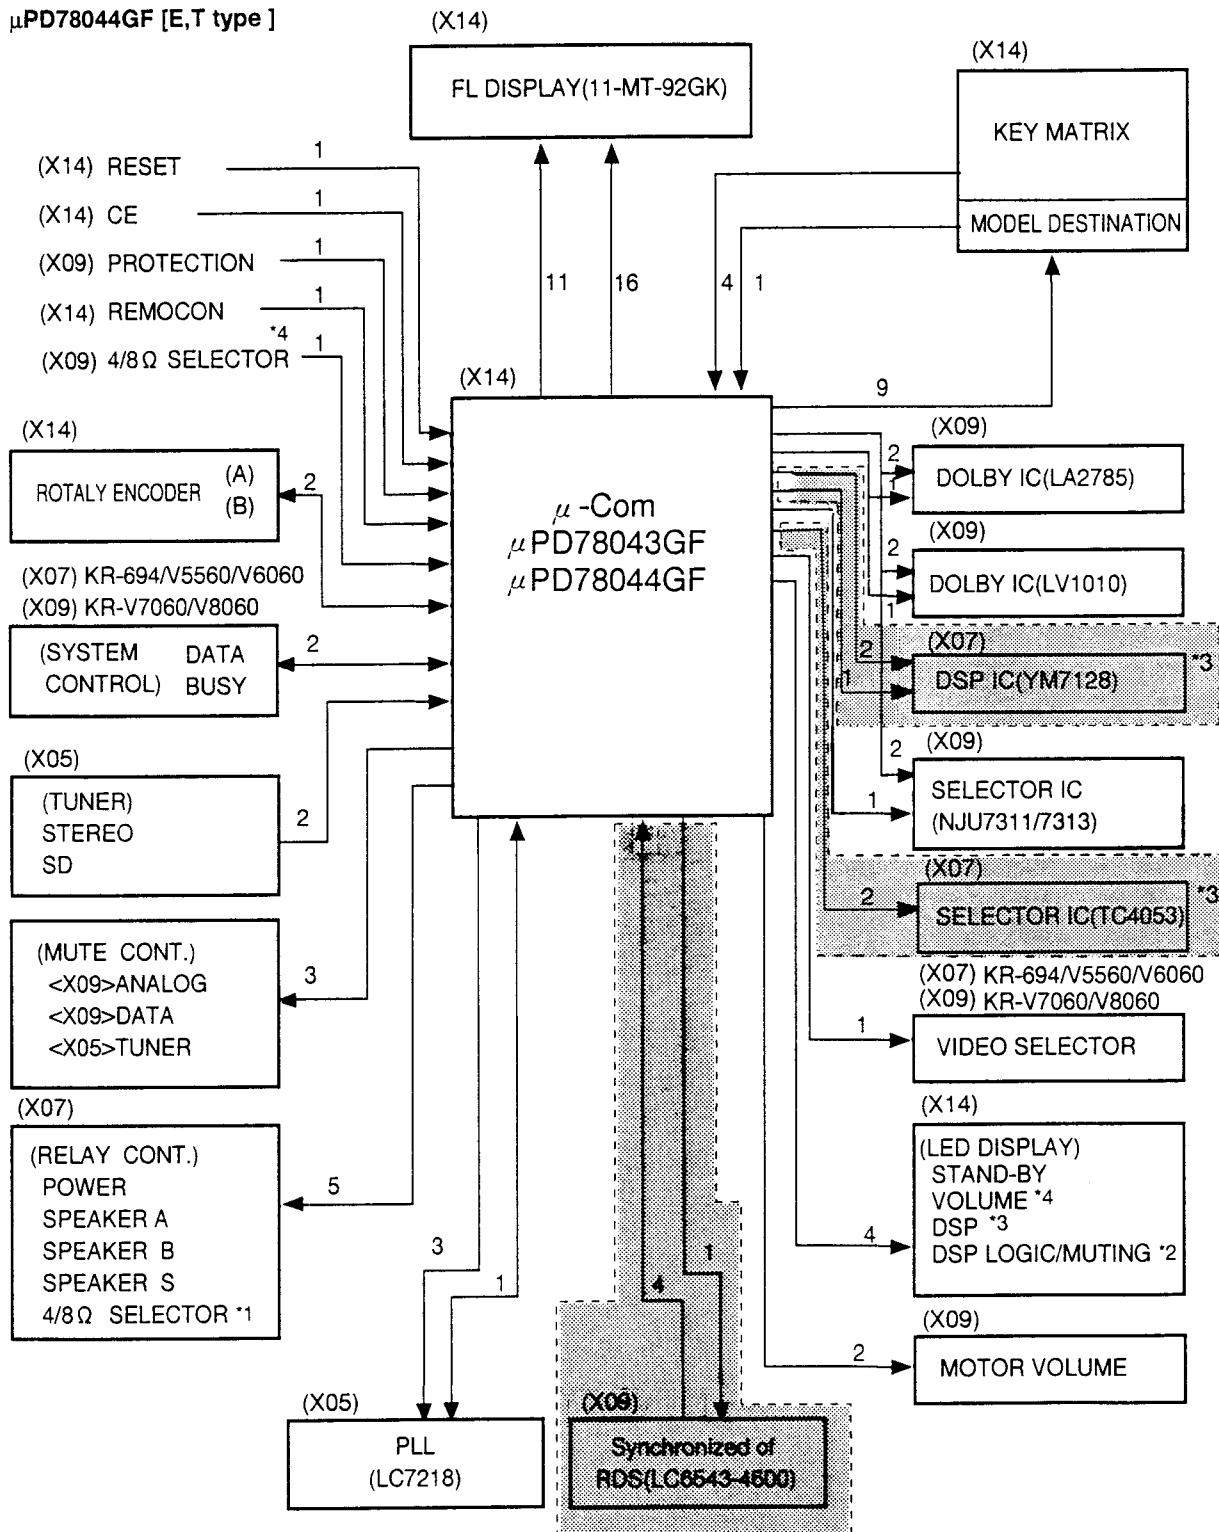

*1 : KR-V6060 only

*2 : Usually, DSP LOGIC(LED) , MUTING(LED) when KR-V5560.

*3 : KR-V8060 only

*4 : Unused for KR-V5560.

Shaded box : μ PD78044GF ONLY


KR-694/V5560/V6060

CIRCUIT DESCRIPTION

② Port layout

μPD78043GF [K,P,M,X,Y type]

μPD78044GF [E,T type]

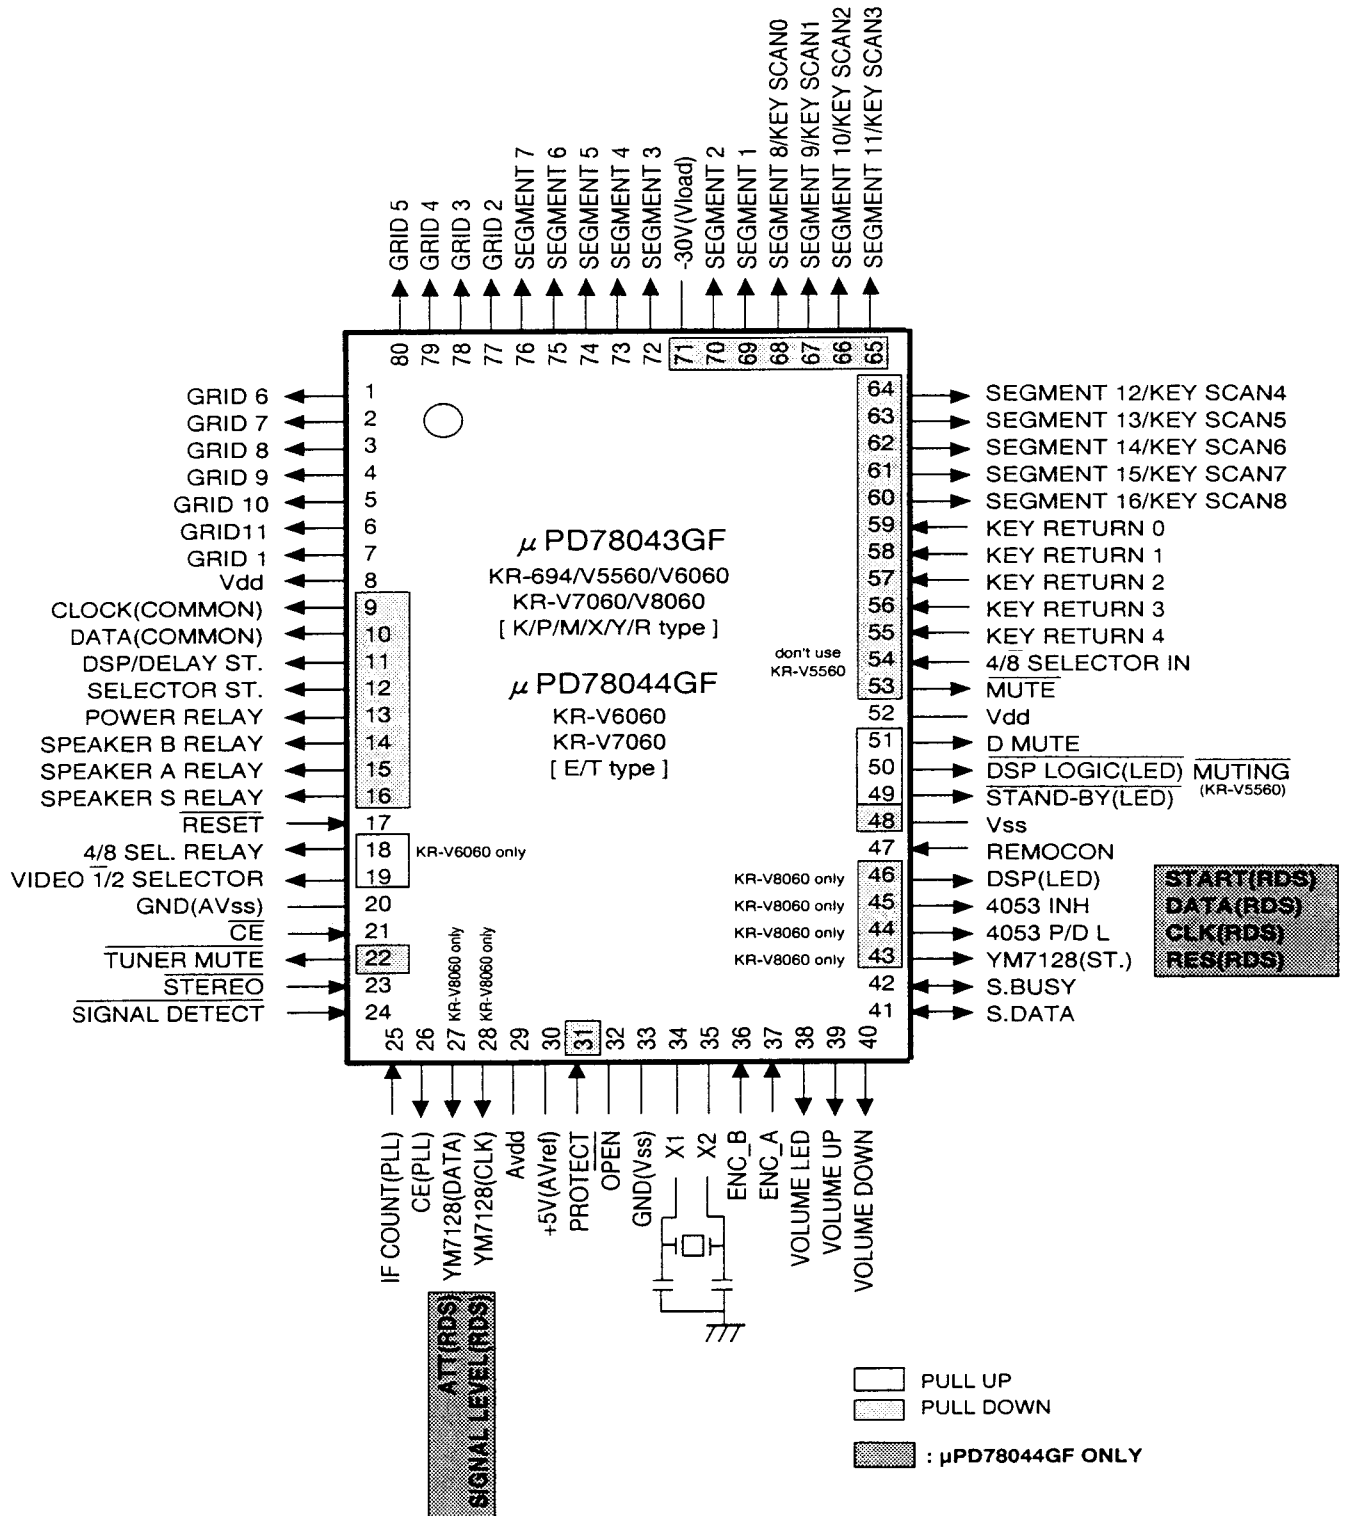

KR-694/V5560/V6060

CIRCUIT DESCRIPTION

③ Pin description

For pin numbers marked by an asterisk(*) the upper row is μ PD78043GF and the lower () row is μ PD78044GF.

Pin No.	μ -Com No.	Port I/O	Name	Description
1		OUT	GRID 6	FL Grid 6
2		OUT	GRID 7	FL Grid 7
3		OUT	GRID 8	FL Grid 8
4		OUT	GRID 9	FL Grid 9
5		OUT	GRID 10	FL Grid 10
6		OUT	GRID 11	FL Grid 11
7		OUT	GRID 1	FL Grid 1
8		-	Vdd	Microprocessor power supply
9		OUT	CLOCK (COMMON)	Clock for control IC (ANALOG SW/PLL IC/DSP)
10		OUT	DATA (COMMON)	Data for control IC (ANALOG SW/PLL IC/DSP)
11		OUT	DSP/DELAY ST.	DSP IC Strobe for control (LA2785/LV1010)
12		OUT	SELECTOR ST.	Strobe for control selector IC
13		OUT	POWER RELAY	Power relay control H: POWER ON L: POWER OFF
14		OUT	SPEAKER B RELAY	Speaker B relay control H: SP B ON L: SP B OFF
15		OUT	SPEAKER A RELAY	Speaker A relay control H: SP A ON L: SP A OFF
16		OUT	SPEAKER S RELAY	Surround speaker relay control H: SP S ON L: SP S OFF
17		IN	RESET	Microprocessor reset
18		OUT	4/8 CHANGE OVER RELAY	TAP control (KR-V6060 only) H: HIGH TAP L: LOW TAP
19		OUT	VIDEO 1/2 SELECTOR	VIDEO Selector H: VIDEO 2 L: VIDEO 1
20		-	AVss	A/D power supply(GND)
21		IN	CE	Microprocessor CE
22		OUT	TUNER MUTE	TUNER MUTE control H: MUTE OFF L: MUTE ON
23		IN	STEREO	Stereo signal detection H: MONORAL L: STEREO
24		IN	SIGNAL DETECT	Synchronized signal detection H: NO TUNED L: TUNED
25		IN	IF COUNT(PLL)	IF COUNT Data (PLL DO)
26		OUT	CE(PLL)	PLL CE
*27	μ PD78043GF	OUT	YM7128(DATA)	DSP IC Data for control
*27	μ PD78044GF	OUT	ATT(RDS)	Atineter control
*28	μ PD78043GF	OUT	YM7128(CLK)	DSP IC Clock for control
*28	μ PD78044GF	OUT	SIGNAL LEVEL(RDS)	SIGNAL LEVEL (A/D)
29		-	AVdd	A/D Power supply
30		-	AVref	A/D Reference voltage (+5V)
31		IN	PROTECT	Protection detection H: PROTECTION L: NORMAL
32		-	OPEN	
33		-	Vss	Microprocessor power supply(GND)
34		IN	X1	4.19 MHz Oscillator
35		OUT	X2	4.19 MHz Oscillator
36		IN	ENC_B	Encoder input B
37		IN	ENC_A	Encoder input A
38		OUT	VOLUME LED	VOLUME LED control H: LED OFF L: LED ON
39		OUT	VOLUME UP	MOTOR VOLUME control (UP)
40		OUT	VOLUME DOWN	MOTOR VOLUME control (DOWN)
41		I/O	S.DATA	8 bit system DATA

KR-694/V5560/V6060

CIRCUIT DESCRIPTION

For pin numbers marked by an asterisk(*) the upper row is μ PD78043GF and the lower () row is μ PD78044GF.

Pin No.	μ -Com No.	Port I/O	Name	Description
42		I/O	S.BUSY	8 bit system BUSY
*43	μ PD78043GF	OUT	YM7128(ST.)	DSP IC Strobe for control
*43	μ PD78044GF	OUT	RES(RDS)	RDS Reset
*44	μ PD78043GF	OUT	4053 P/D L	TC4053 Control pin
*44	μ PD78044GF	OUT	CLK(RDS)	RDS Clock
*45	μ PD78043GF	OUT	4053 INH	TC4053 Control pin
*45	μ PD78044GF	OUT	DATA(RDS)	RDS Data
*46	μ PD78043GF	OUT	DSP(LED)	DSP LED Control H: LED ON L: LED OFF
*46	μ PD78044GF	OUT	START(RDS)	RDS Start
47		IN	REMOCON	Remote control input
48		-	GND	
49		OUT	STAND-BY(LED)	STAND-BY LED Control H: LED OFF L: LED ON
50		OUT	DSP LOGIC(LED)	DSP LOGIC LED Control H: LED OFF L: LED ON
51		OUT	D MUTE	DATA MUTE
52		-	Vdd	Microprocessor power supply
53		OUT	MUTE	Selector MUTE control H: MUTE OFF L: MUTE ON
54		IN	4/8 SELECTOR IN	Speaker impedance changeover H: 4 Ω L: 8 Ω
55		IN	KEY RETURN 4	Key return 4
56		IN	KEY RETURN 3	Key return 3
57		IN	KEY RETURN 2	Key return 2
58		IN	KEY RETURN 1	key return 1
59		IN	KEY RETURN 0	Key return 0
60		OUT	SEGMENT 16	FL Segment 16/key scan 8
61		OUT	SEGMENT 15	FL Segment 15/key scan 7
62		OUT	SEGMENT 14	FL Segment 14/key scan 6
63		OUT	SEGMENT 13	FL Segment 13/key scan 5
64		OUT	SEGMENT 12	FL Segment 12/key scan 4
65		OUT	SEGMENT 11	FL Segment 11/key scan 3
66		OUT	SEGMENT 10	FL Segment 10/key scan 2
67		OUT	SEGMENT 9	FL Segment 9/key scan 1
68		OUT	SEGMENT 8	FL Segment 8/key scan 0
69		OUT	SEGMENT 1	FL Segment 1
70		OUT	SEGMENT 2	FL Segment 2
71		-	Vload	FL Driver power supply(- 30V)
72		OUT	SEGMENT 3	FL Segment 3
73		OUT	SEGMENT 4	FL Segment 4
74		OUT	SEGMENT 5	FL Segment 5
75		OUT	SEGMENT 6	FL Segment 6
76		OUT	SEGMENT 7	FL Segment 7
77		OUT	GRID 2	FL Grid 2
78		OUT	GRID 3	FL Grid 3
79		OUT	GRID 4	FL Grid 4
80		OUT	GRID 5	FL Grid 5

KR-694/V5560/V6060

ADJUSTMENT

[FM,AM SECTION : E,T Type ONLY]

No.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	TUNER SETTINGS	ALIGNMENT POINT	ALIGN FOR	FIG.
FM SECTION SELECTOR : FM							
1	DISCRIMINATOR	(A) 98.0MHz 1kHz, ± 75 kHz dev 60dB μ (ANT input)	Connect a DC voltmeter between TP3 and TP4.	AUTO or MONO 98.0MHz	L3 (X05-) L4 (X05-)	0V Minimum distortion	(a)
2	DISTORTION (STEREO)	(C) 98.0MHz 1kHz, ± 68.25 kHz dev Selector: L or R Pilot : ± 6.75 kHz dev 60dB μ (ANT input)	(B)	98.0MHz	IFT (W02-)	Minimum distortion. (L or R)	
3	SEPARATION	(C) 98.0MHz Stereo signal 60dB μ (ANT input)	(B)	AUTO 98.0MHz	VR3 (X05-)	Minimum crosstalk	
4	TUNING LEVEL	(A) 98.0MHz 0dev 14dB μ (ANT input)75 Ω 18dB μ (ANT input)30 Ω	(B)	AUTO or MONO 98.0MHz	VR1 (X05-)	Adjust VR1 and stop at the point where ED1(TUNED) goes on.	
AM SECTION SELECTOR : AM							
(1)	TUNING LEVEL	(D) 1008kHz 20dB μ (ANT input)	(B)	1008kHz	VR2 (X05-)	Adjust VR2 and stop at the point where ED1(TUNED) goes on.	


[COMMON]

No.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	AMPLIFIER SETTINGS	ALIGNMENT POINT	ALIGN FOR	FIG.
AUDIO SECTION							
< 1 >	IDLE CURRENT	-	(E) Connect a DC voltmeter across CP1(L) CP2(R) CP3(CENTER) CP4(REAR)	Volume:0	VR1(L) VR2(R) VR3(CENTER) VR4(REAR) (X07-)	22mV	(b)
POWER : ON SELECTOR : CD(NO SIGNAL) SURROUND : PRO LOGIC							
< 2 >	PRO LOGIC S-OUT NOISE LEVEL	Short between TP6 and TP7 (B/5), between TP10 and TP11 (E/5). (X09-)	Connect a oscilloscope at Rear sp L or R. (Connect load with Rear sp L or R.)	Volume:MAX REAR LEVEL:MAX	VR3 (X09-)(E/5)	Minimum noise level (fig. ㉔ point of (c).	(c)

KR-694/V5560/V6060


ADJUSTMENT

(a)

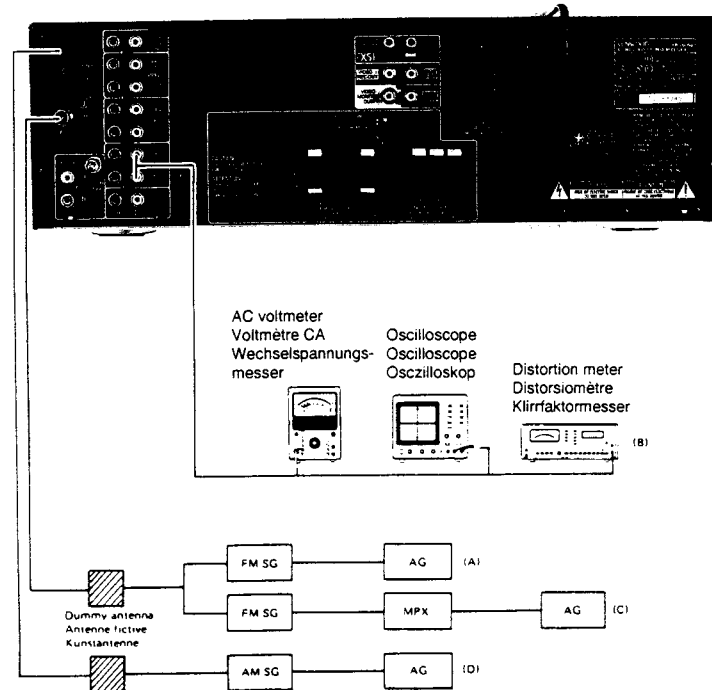

(b)


System connections/Reccordements du système/System-Anschlusse

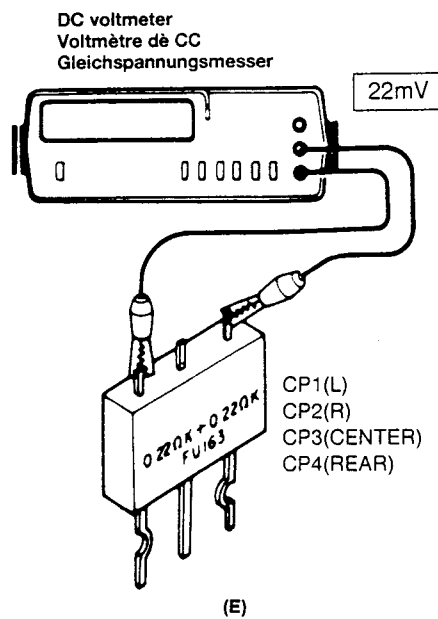

KR-694/V5560/V6060


ADJUSTMENT

(c)

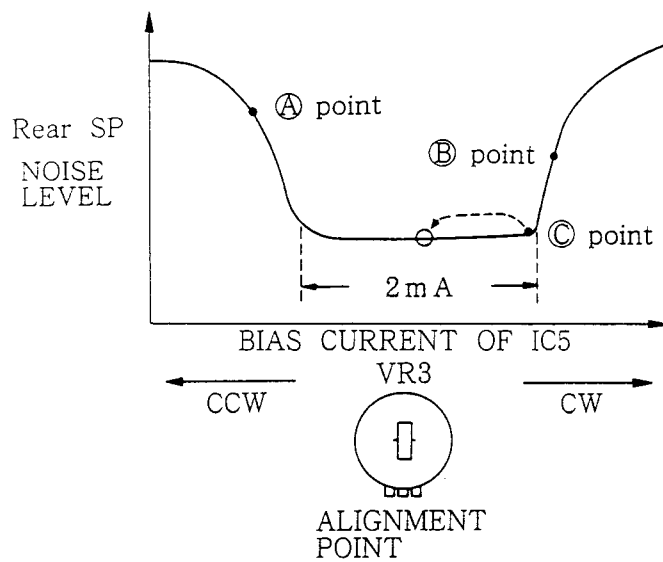


[Procedure]


1) A point

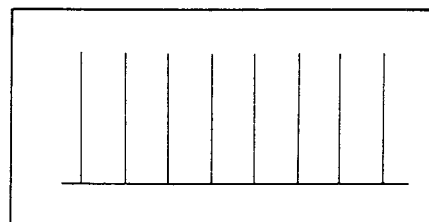


2) B point

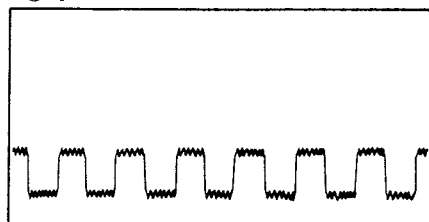

3) C point (Minimum noise level)

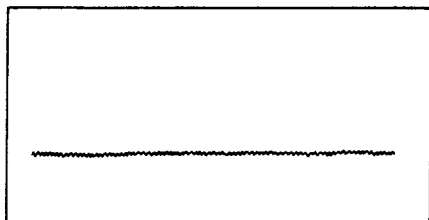


WIRING DIAGRAM

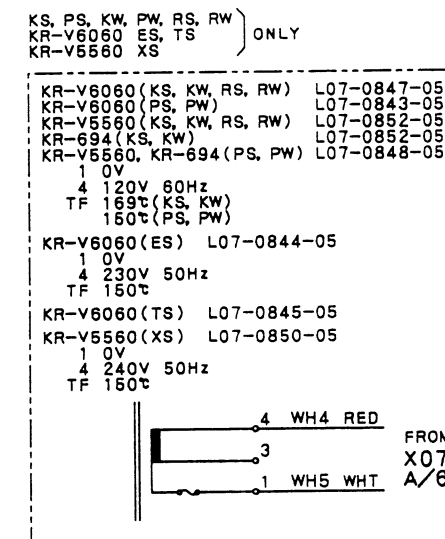


PC BOARD (Component side view)

TUNER UNIT(X05-446X-XX) : Except E,T

DE - EMPHASIS

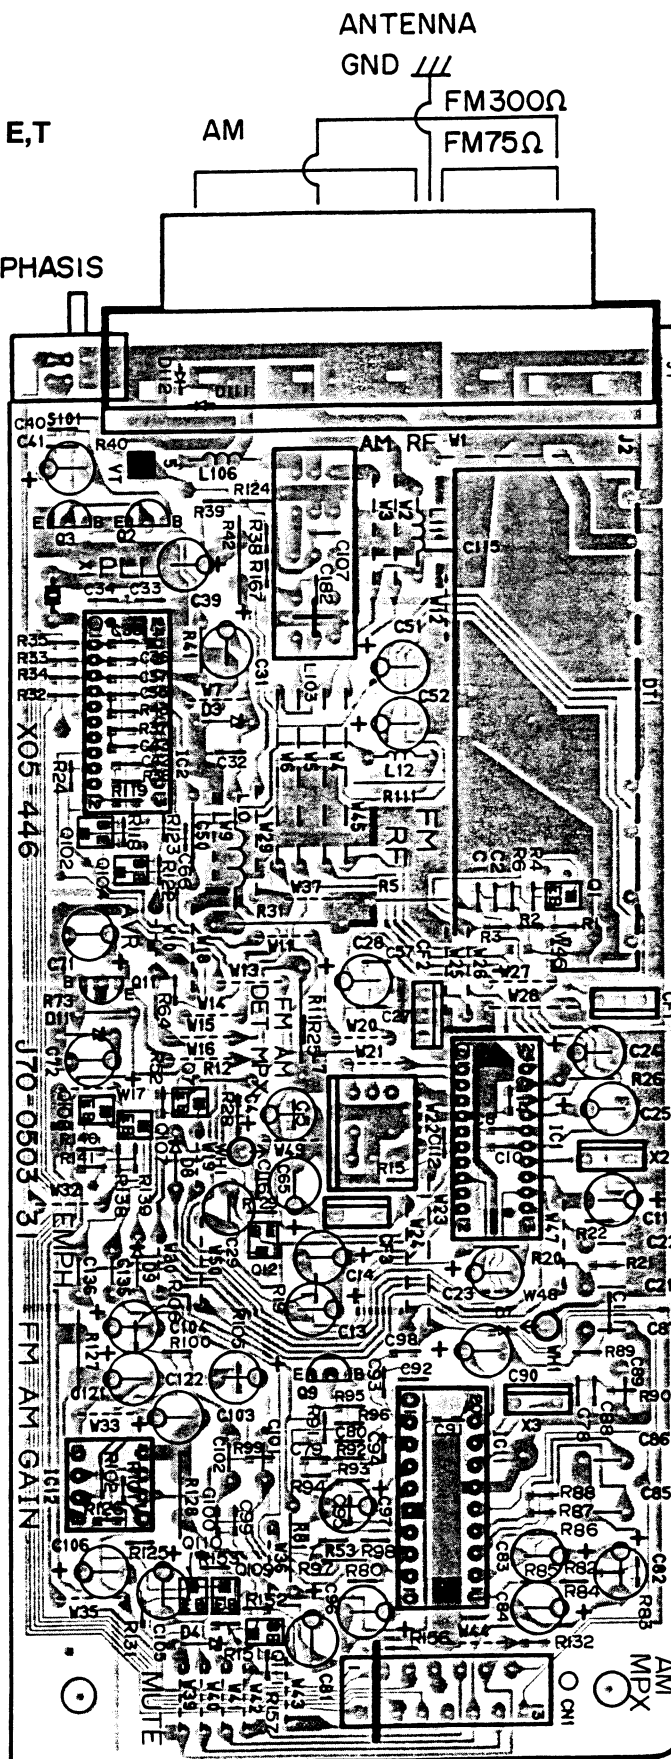

TUNER UNIT(X05-4472-72) : E,T
(KR-V6060 only)

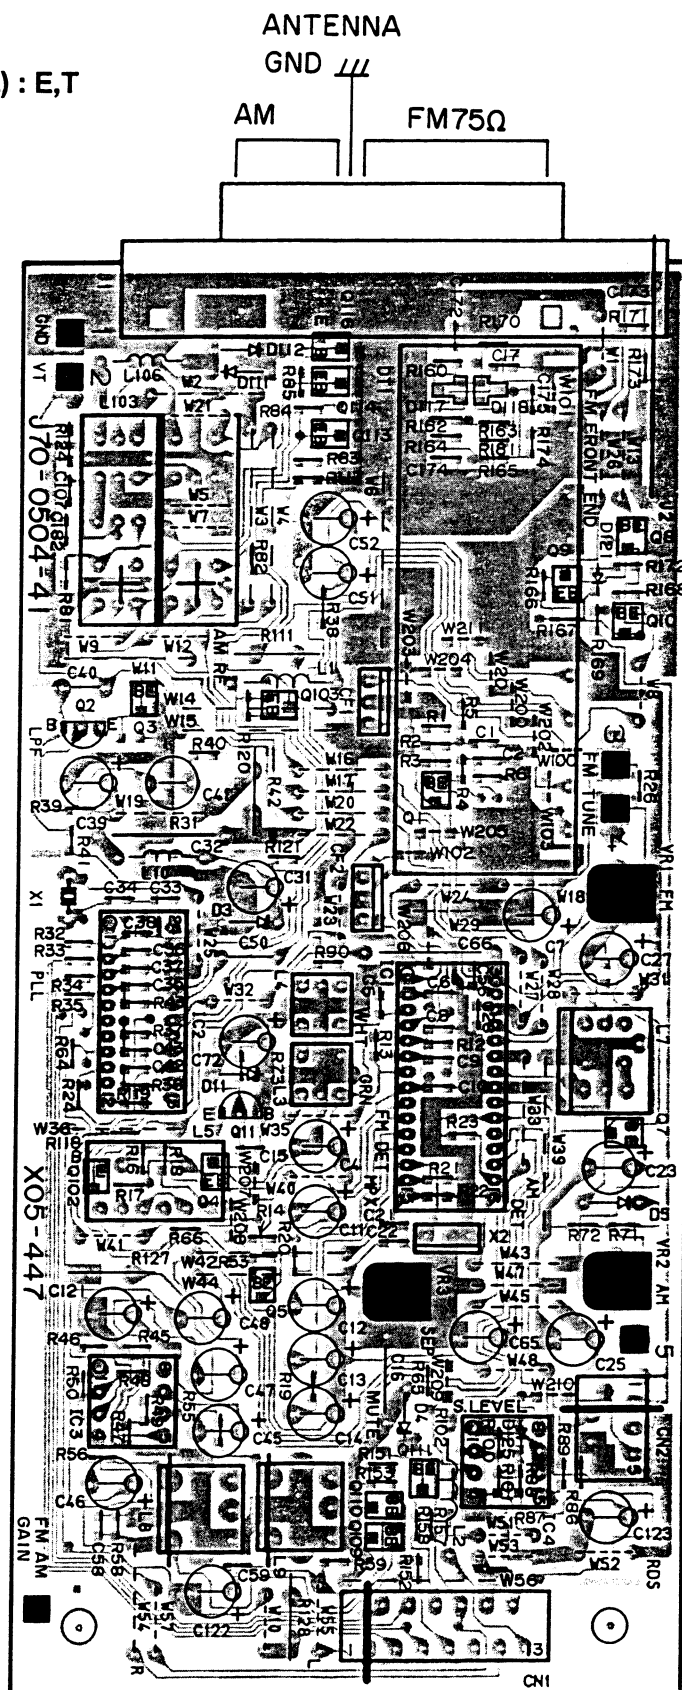

K L M N O P Q R S T U V W X Y Z

2




4



5

A

1


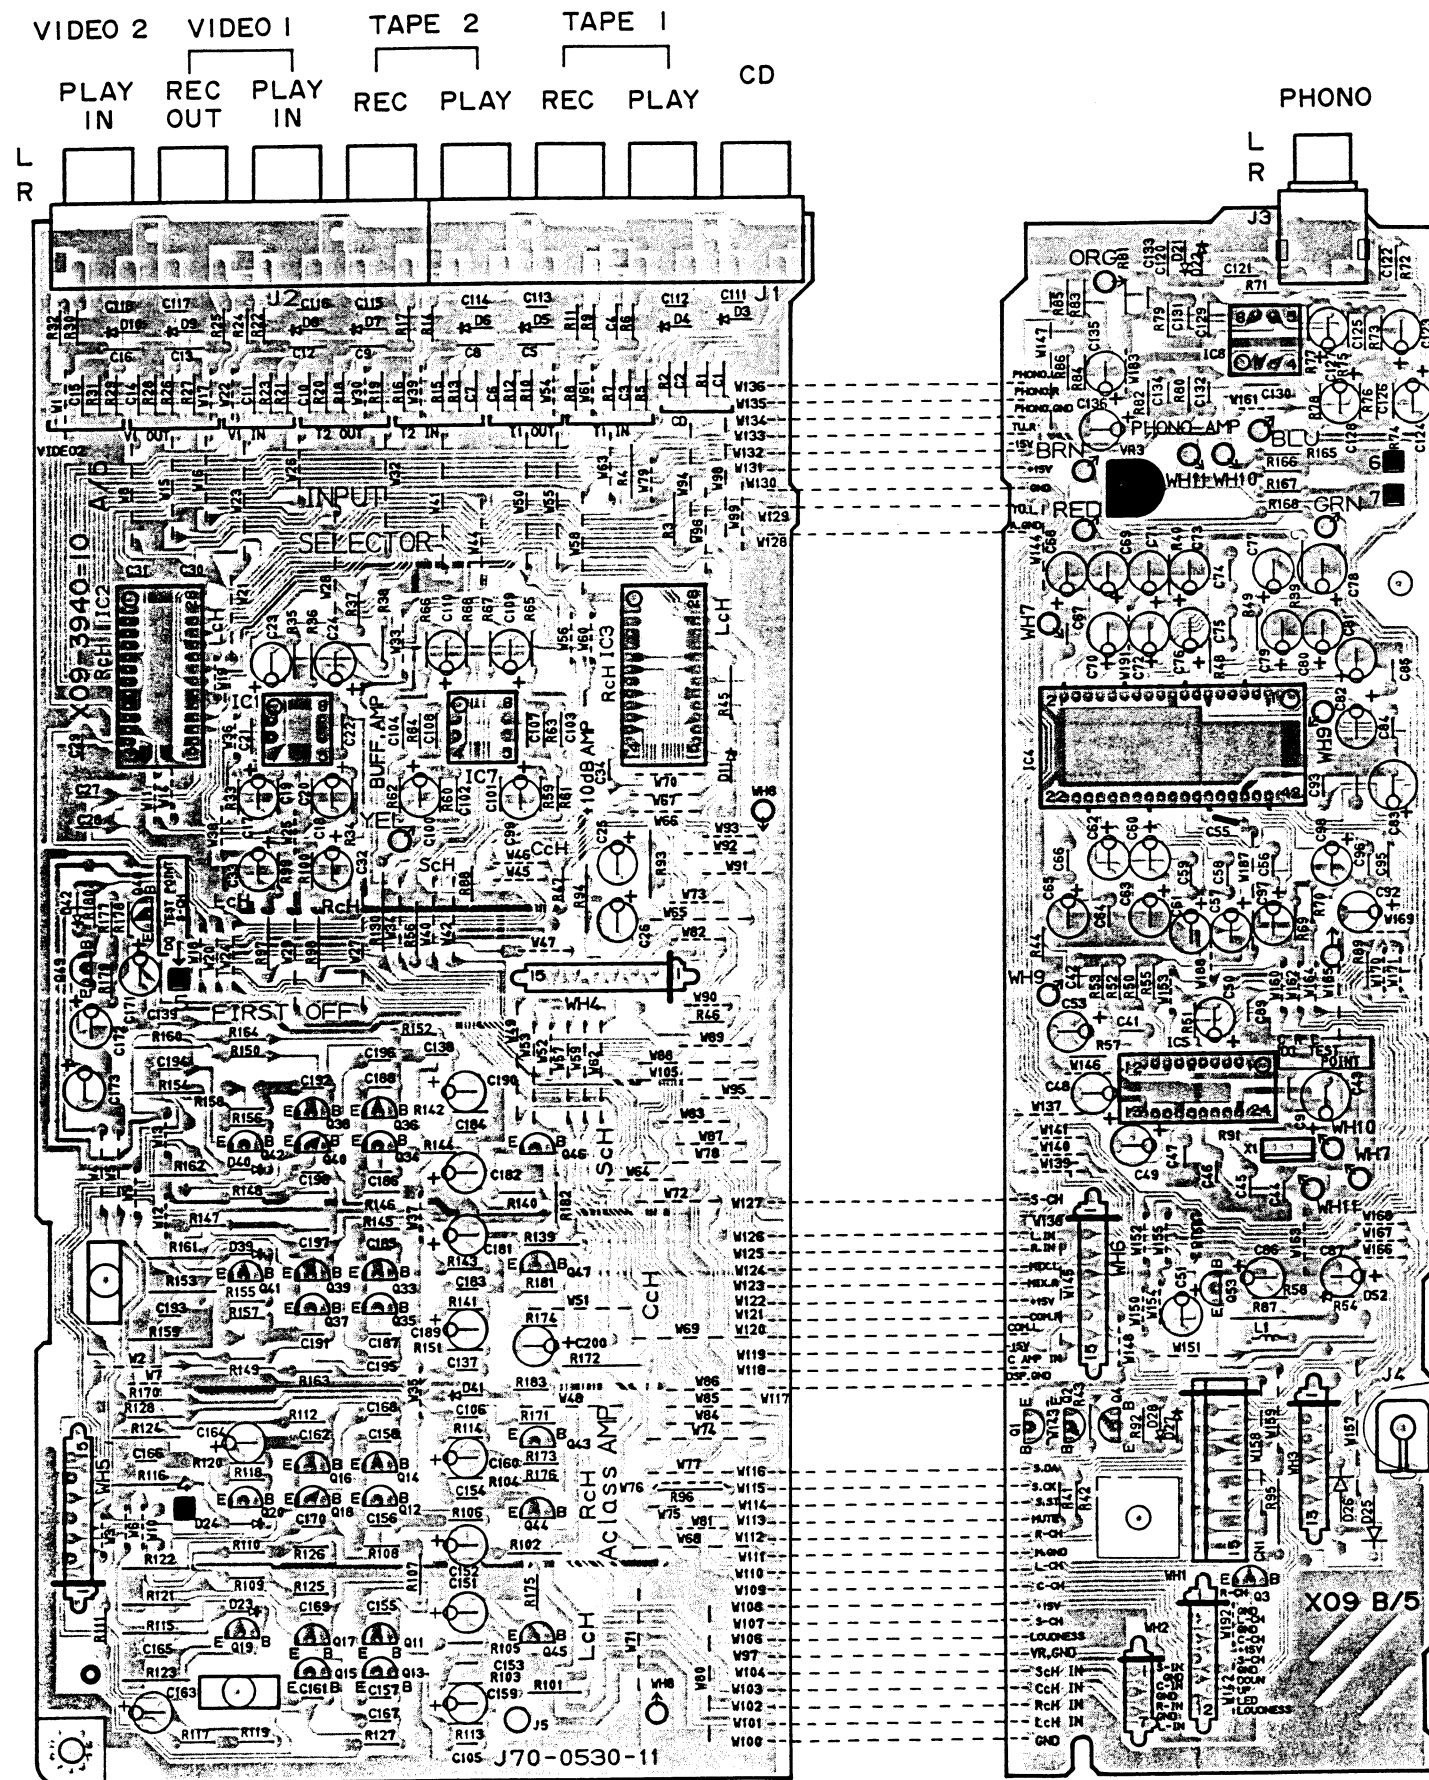


RDS UNIT
KR-V 6060 E,T TYPE ONLY

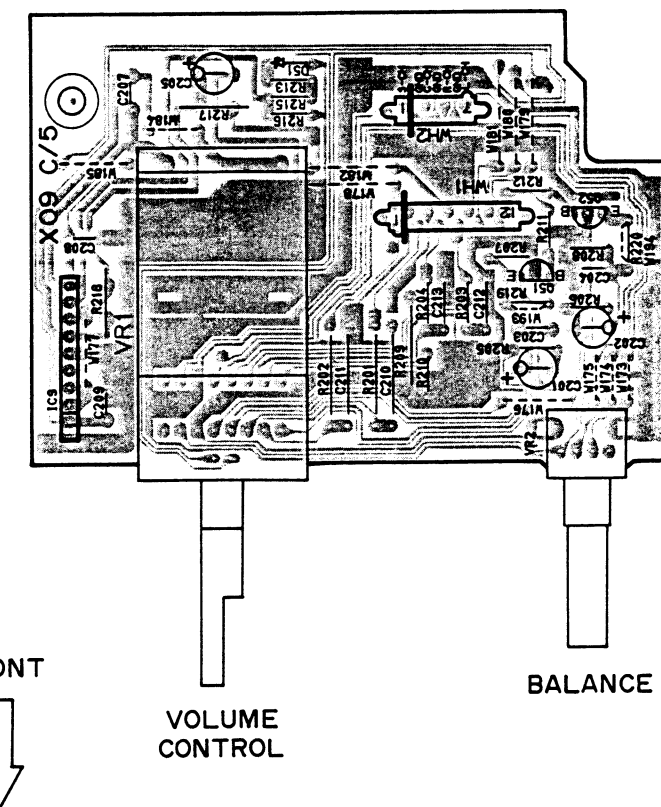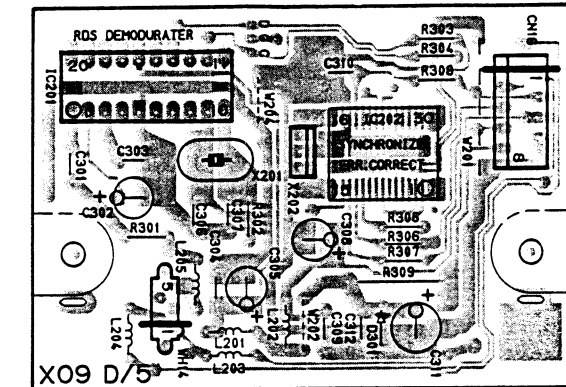


PC BOARD (Component side view)

DISPLAY UNIT(X14-388X-XX)

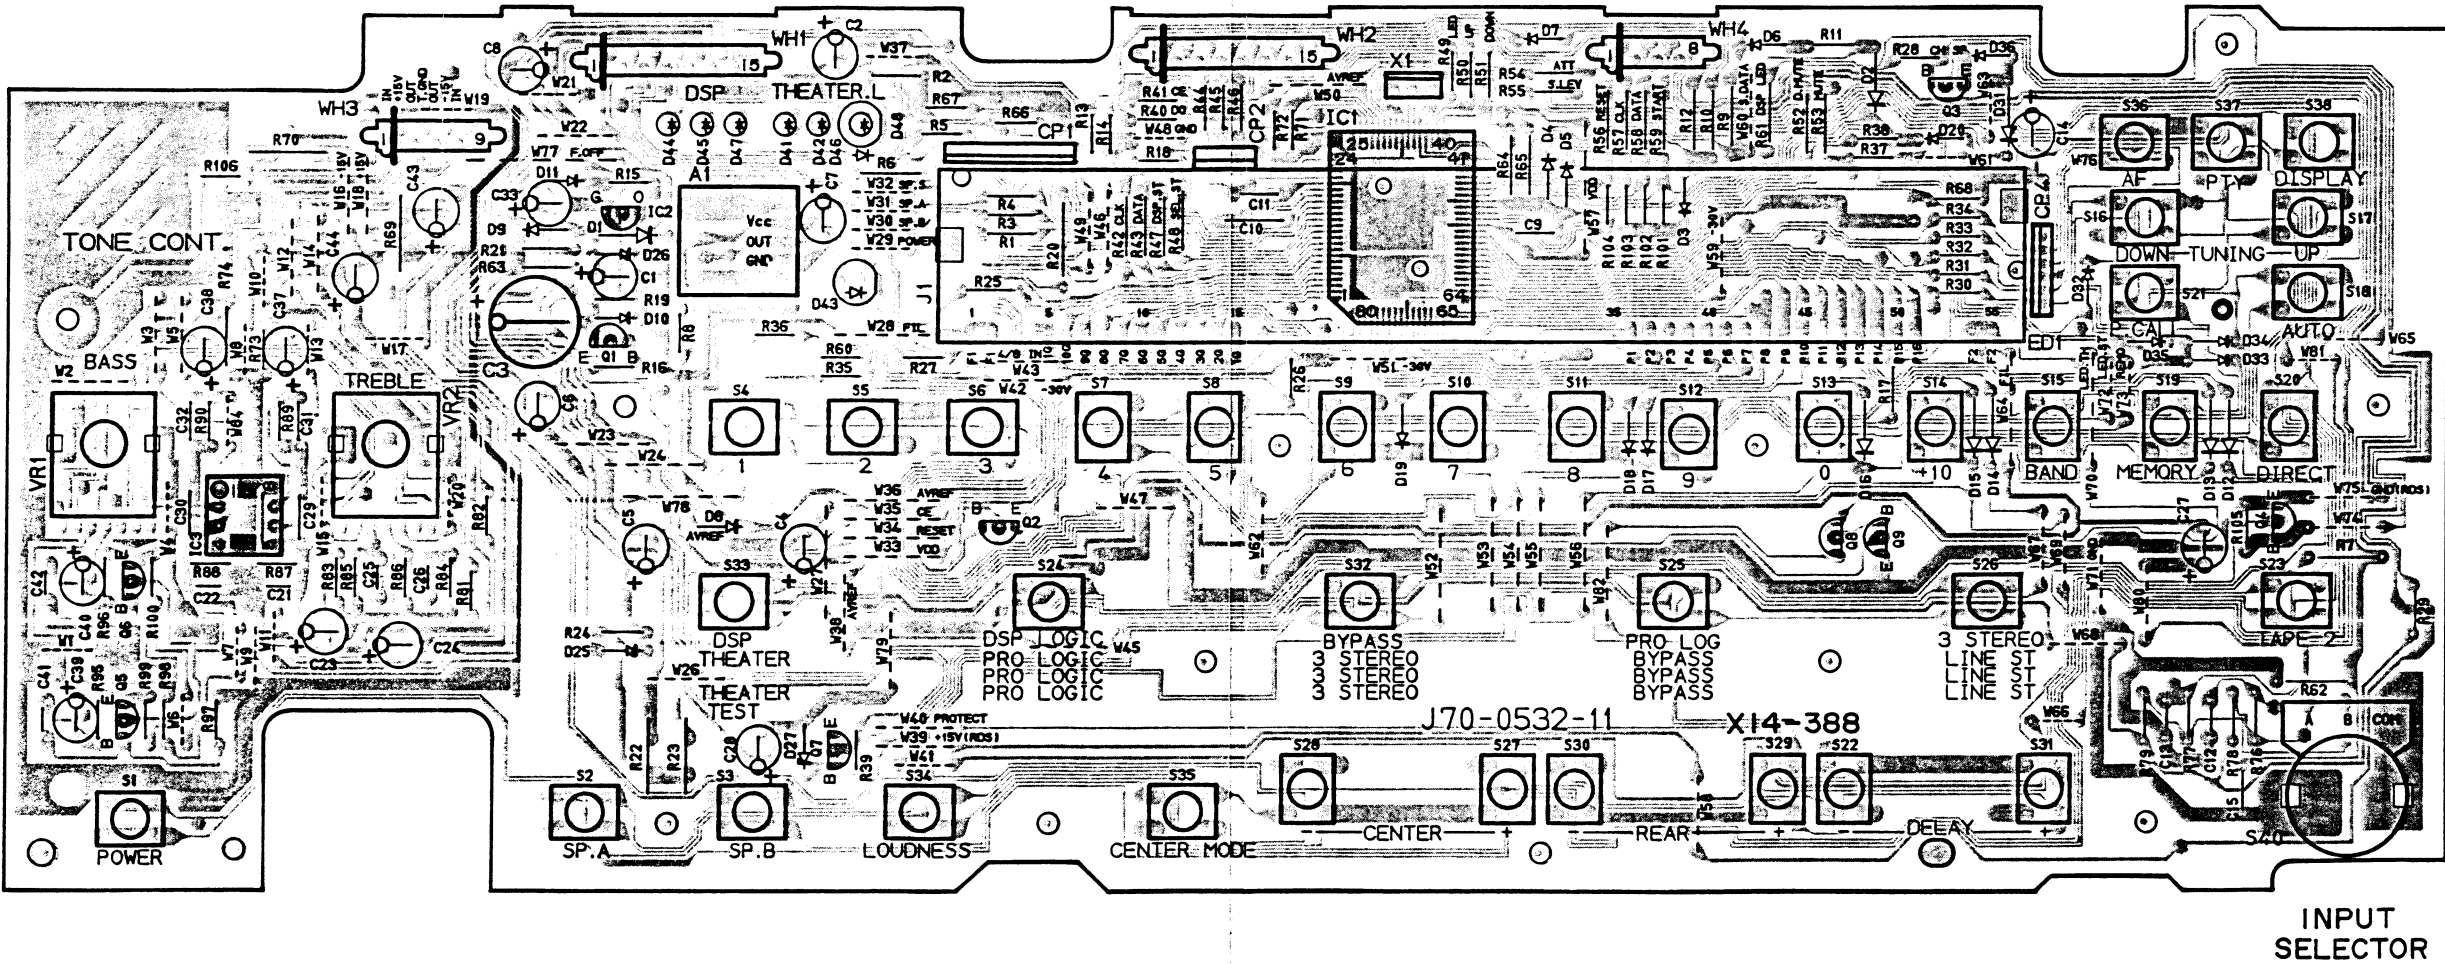


X05-4460-11(K, R, P) X05-4460-71(X) X05-4460-21(M, Y)

X05-4472-72 (

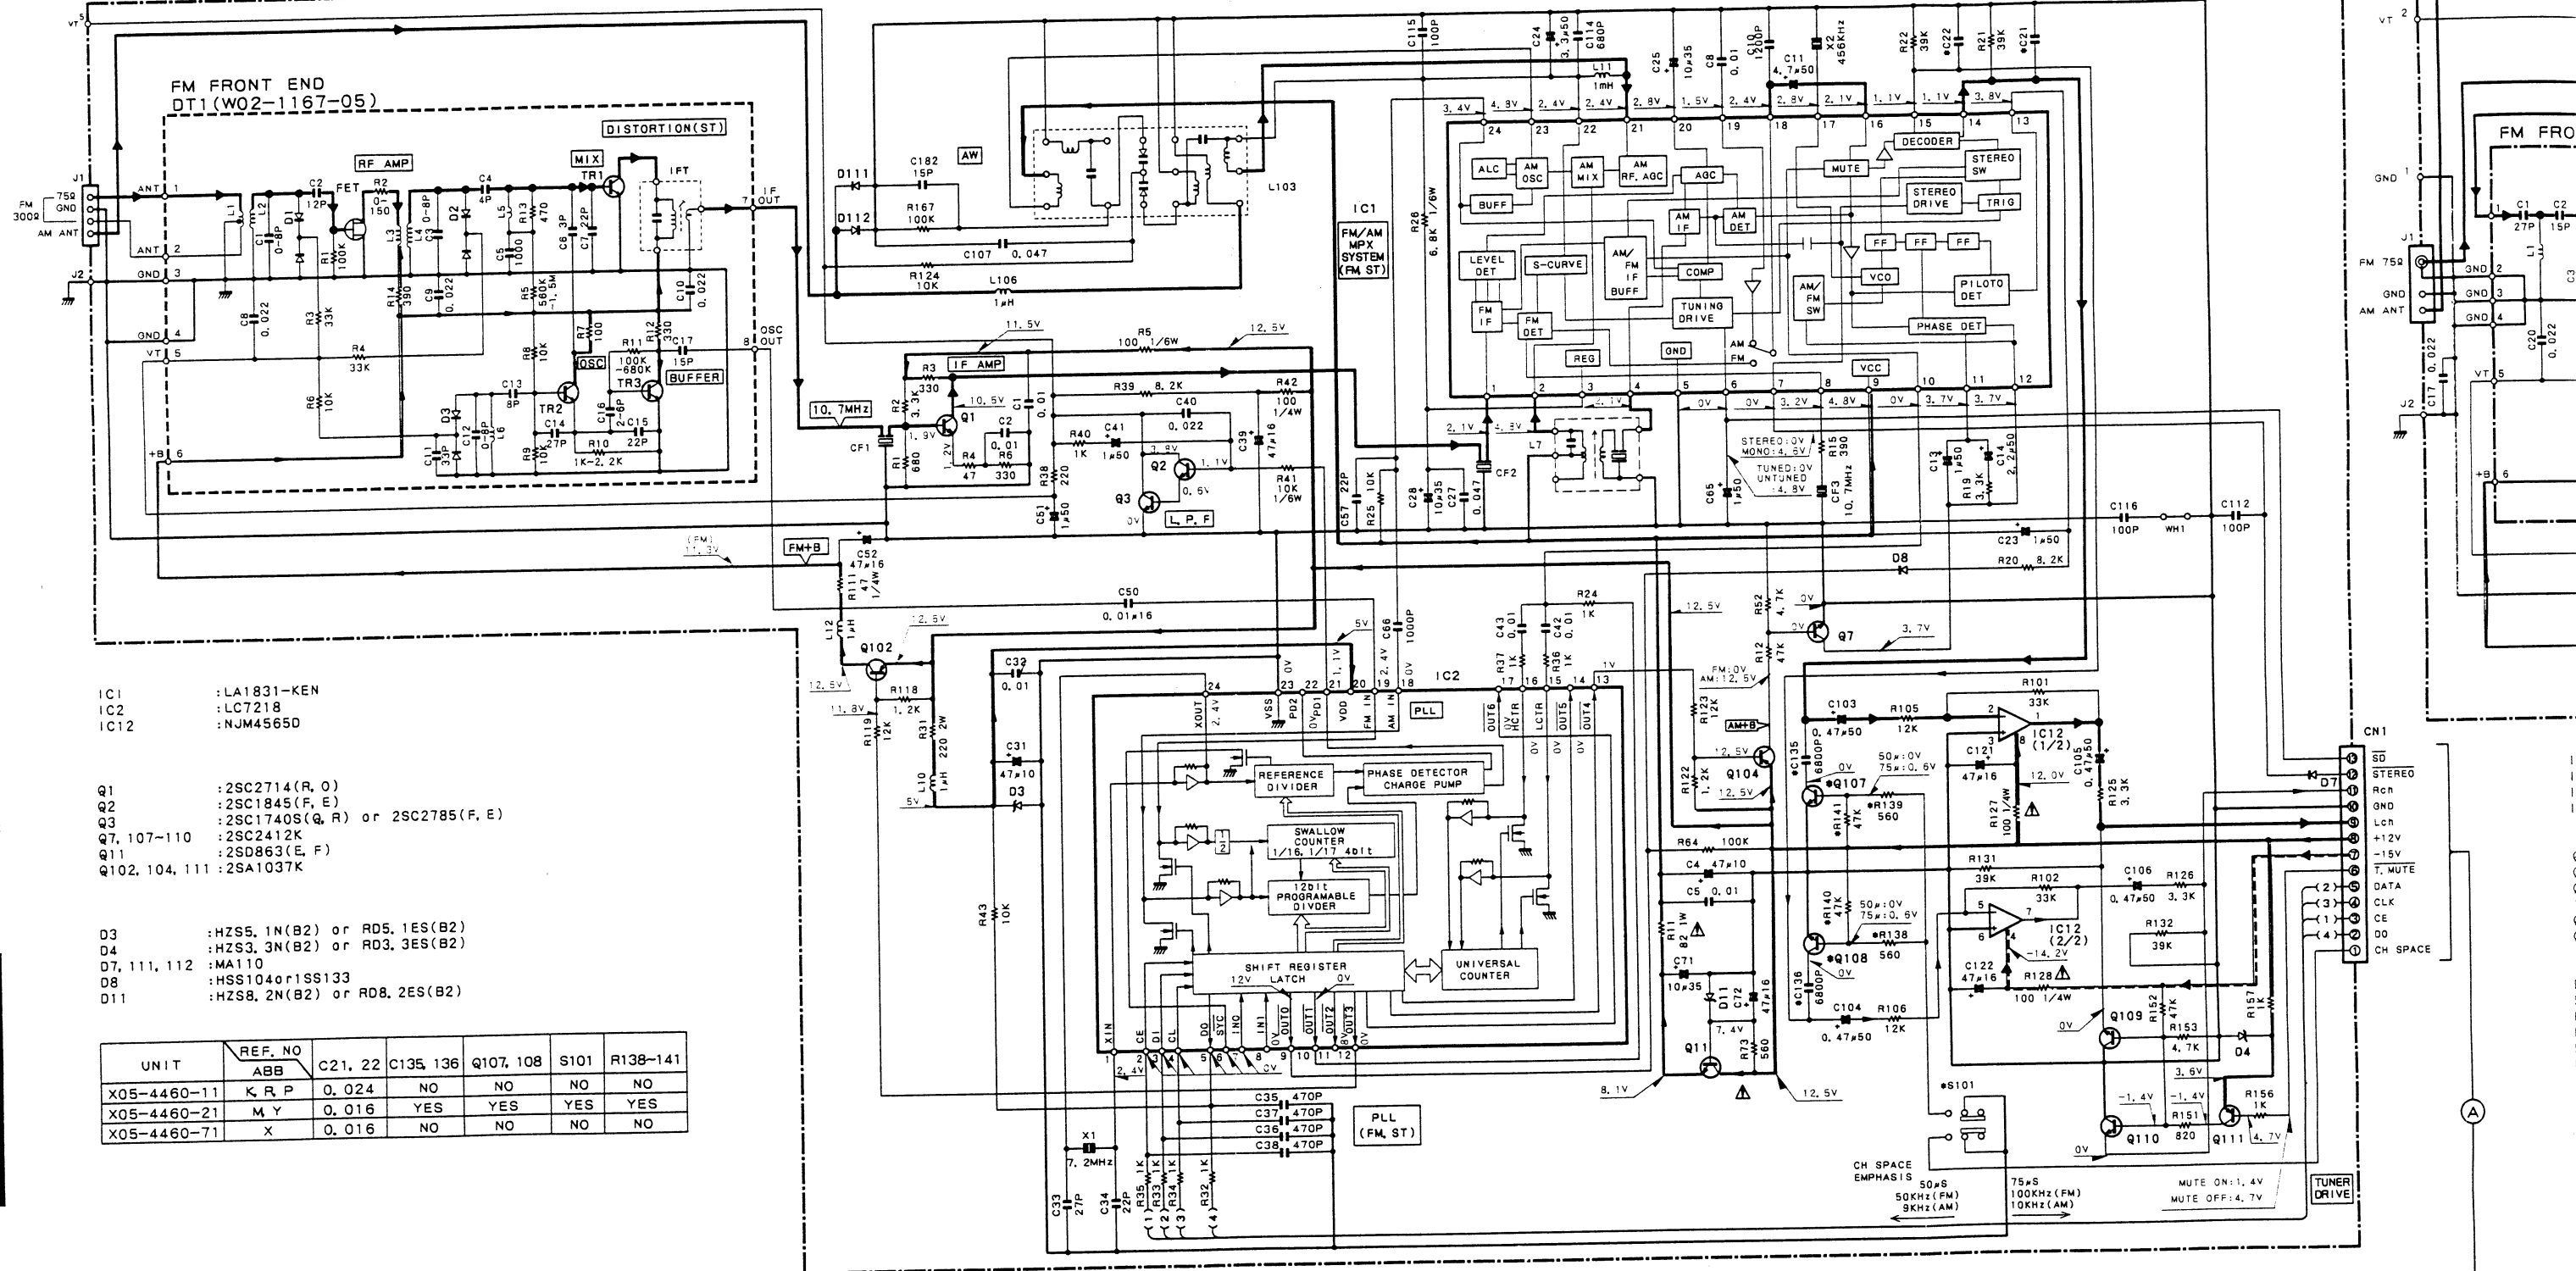

(KR-V6060 E, T TYPE ONLY)


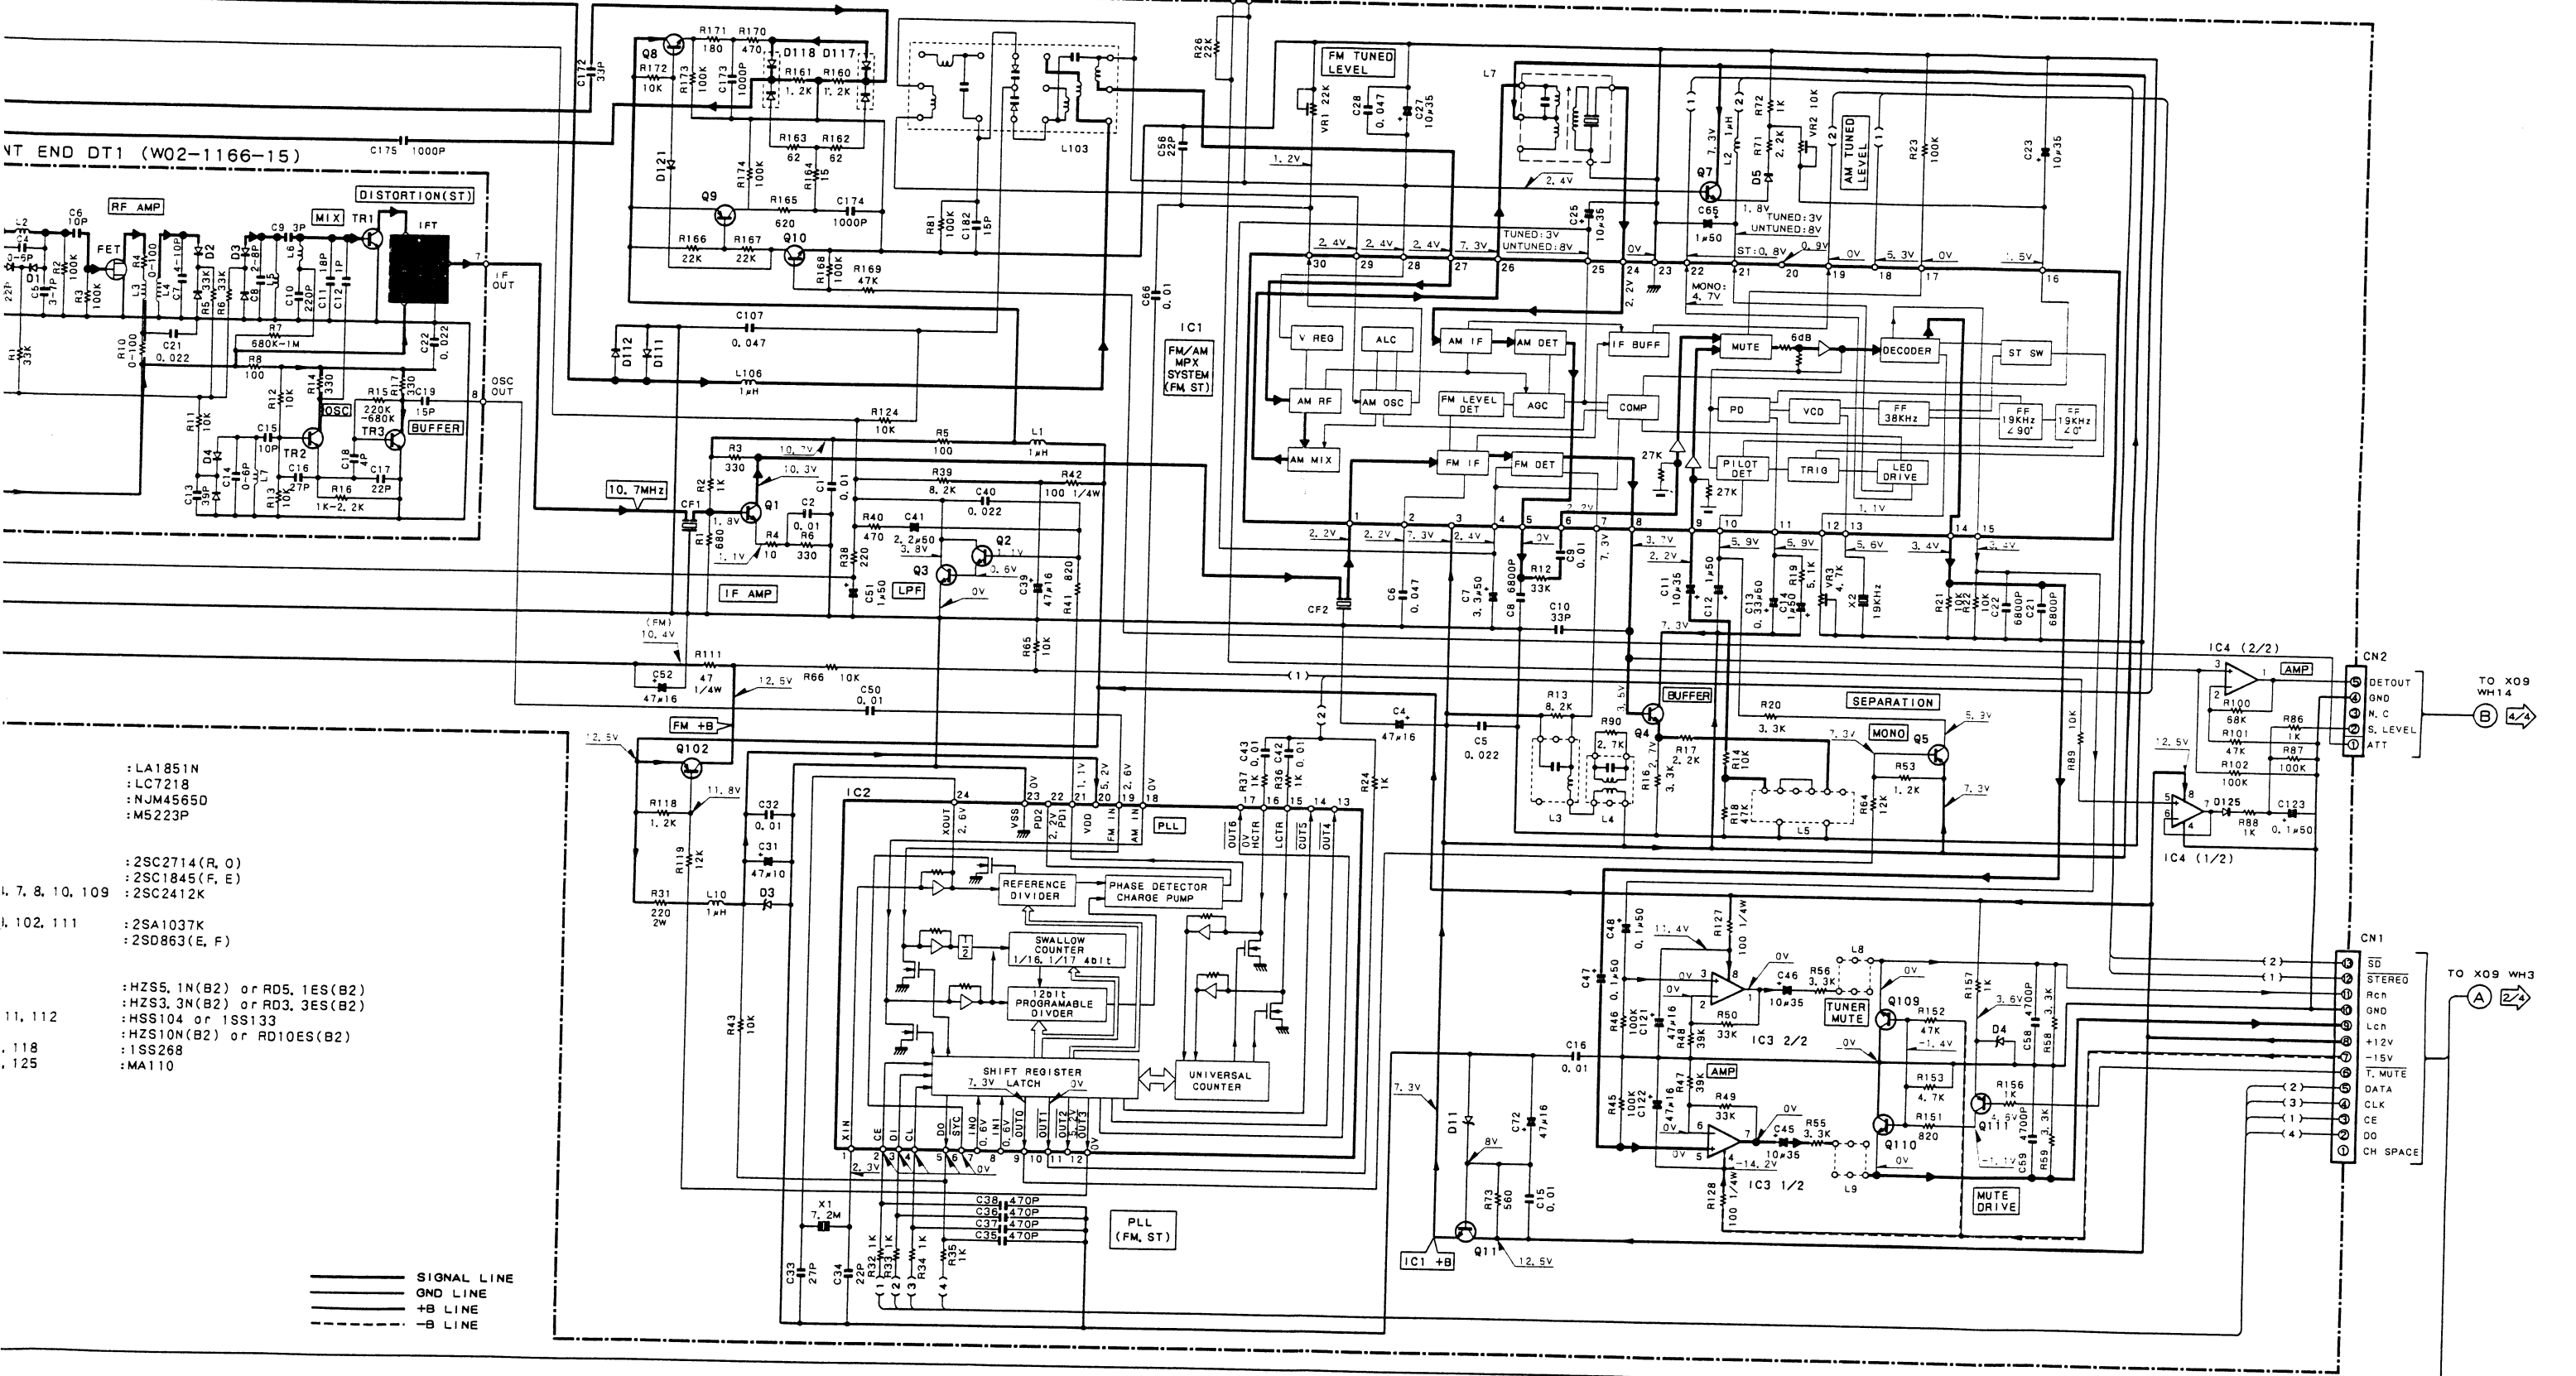


DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

CAUTION : For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list) Δ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

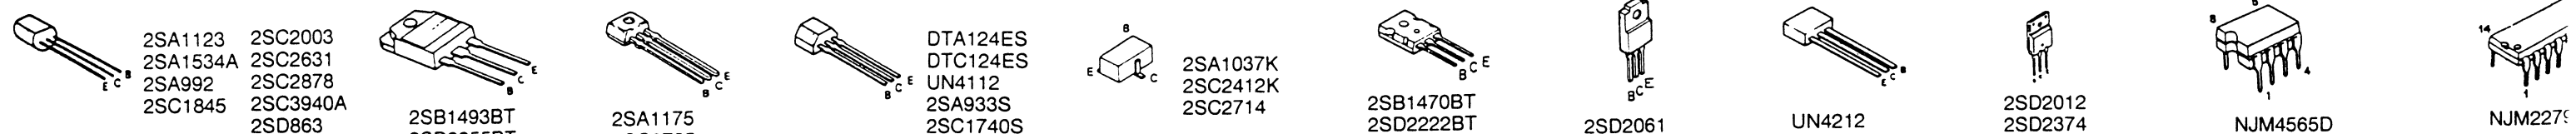

AB

AC

AD

AE

AF

AG

AH


AI



AJ

AK

AL

	C1-4, 7, 8 11, 12, 15, 16 105, 106, 137 138, 121, 122	C51	C167, 168	R113, 114, 151, 152	R213	R219 220	VR1	W76 150 153 154	W193 194	D51
M	NO	YES	2P	270	YES	NO	R29-5087-05	YES	YES	YES
M	YES	NO	7P	270	NO	NO	R29-5087-05	NO	YES	YES
M	NO	YES	2P	360	NO	YES	R29-5088-05	YES	NO	NO
M	NO	YES	2P	360	NO	YES	R29-5088-05	YES	NO	NO

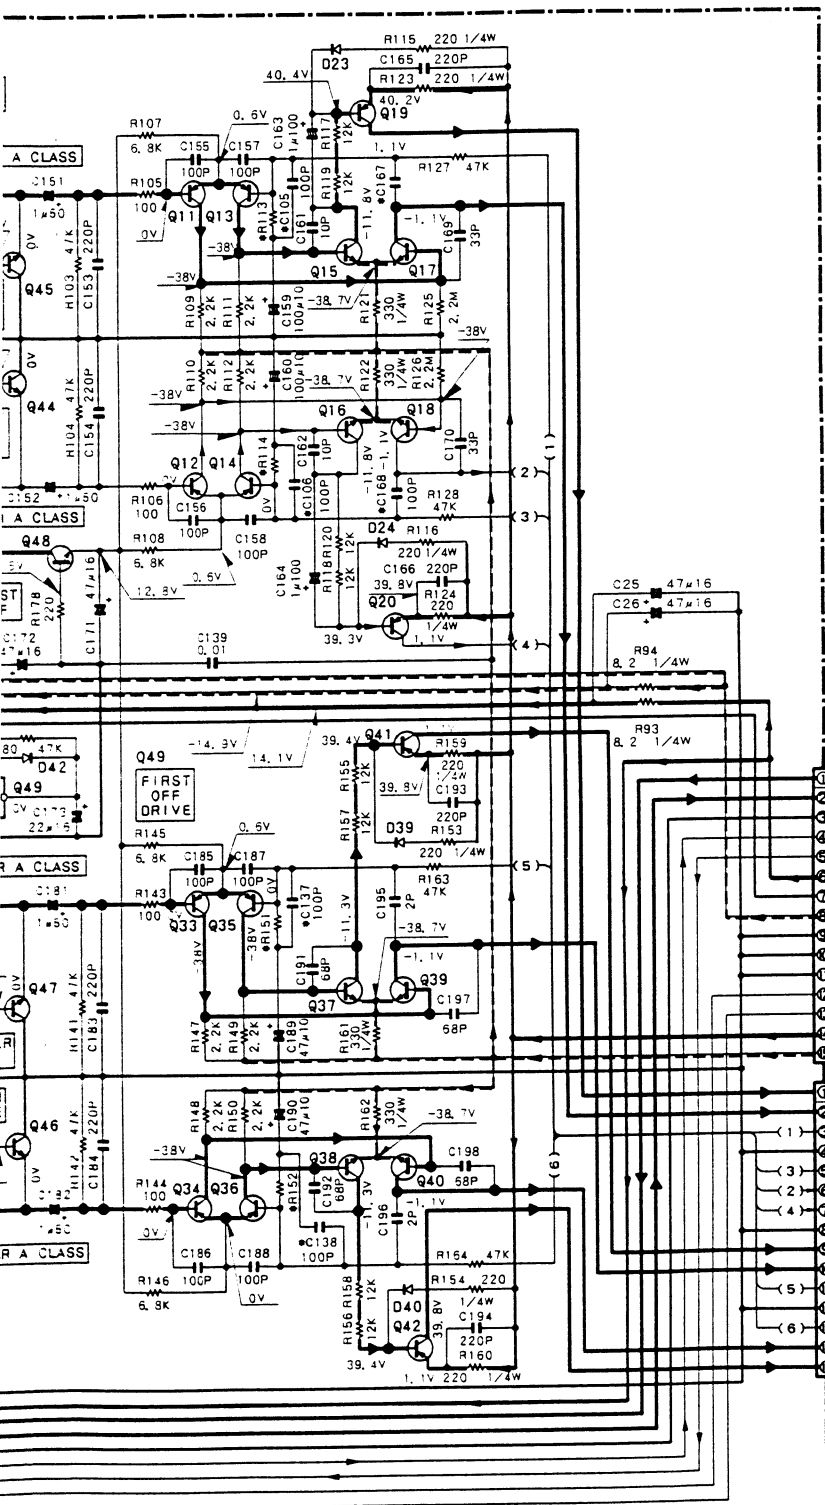

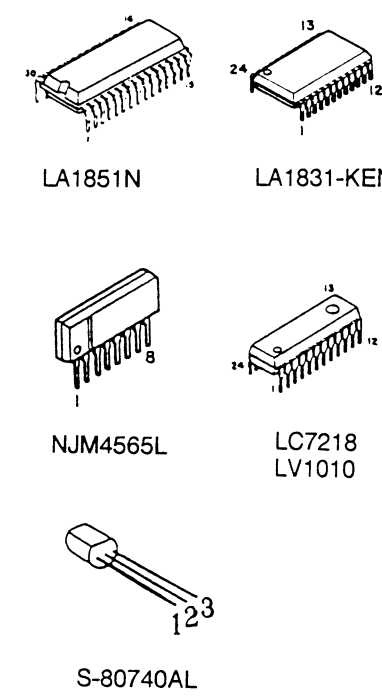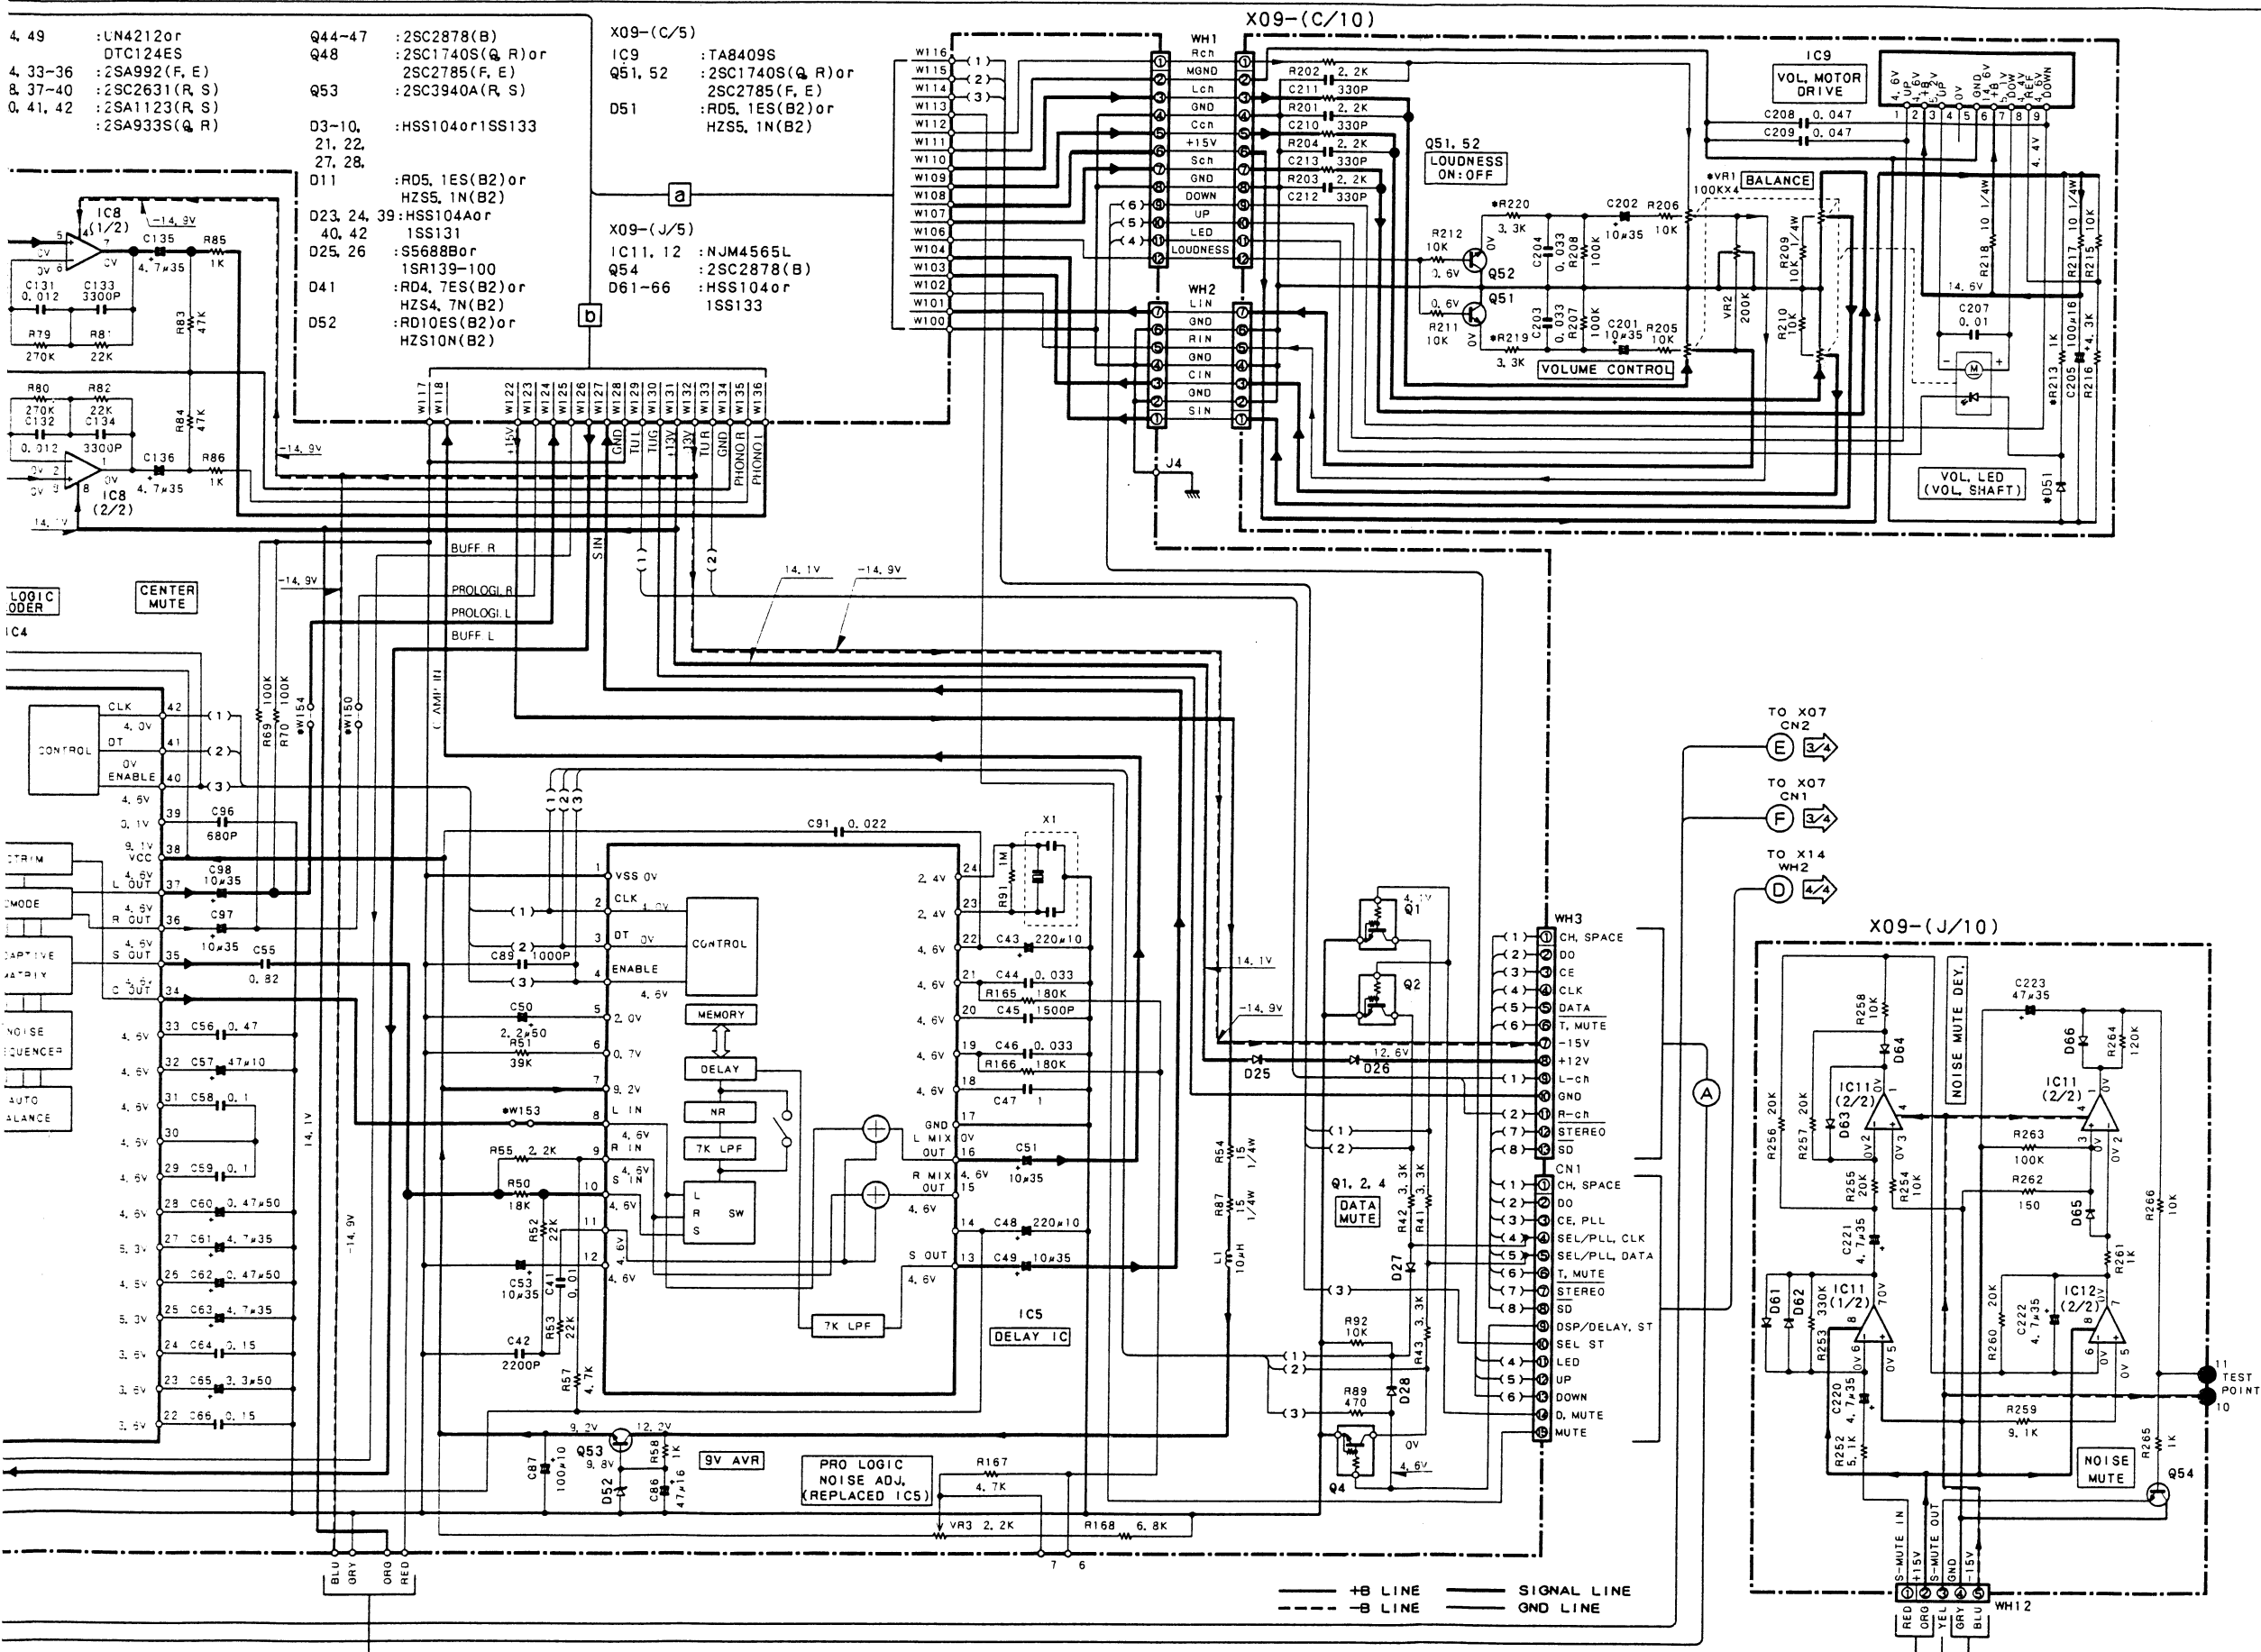


DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.


Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U.geringfügig.

CAUTION : For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list) Δ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

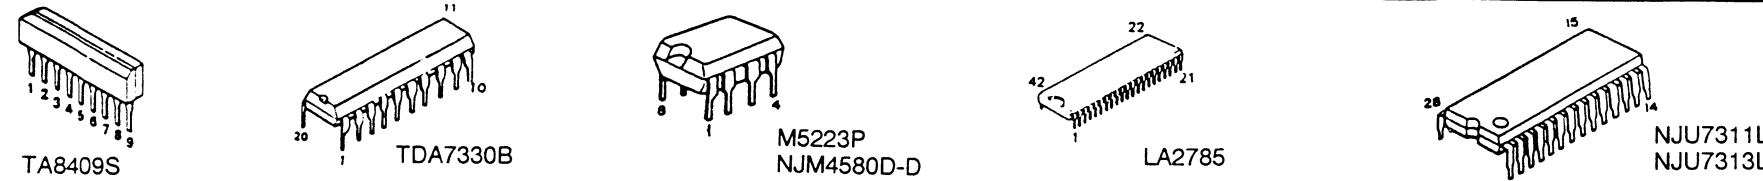


X07-277X-XX (A/6) X07-278X-XX (A/6)

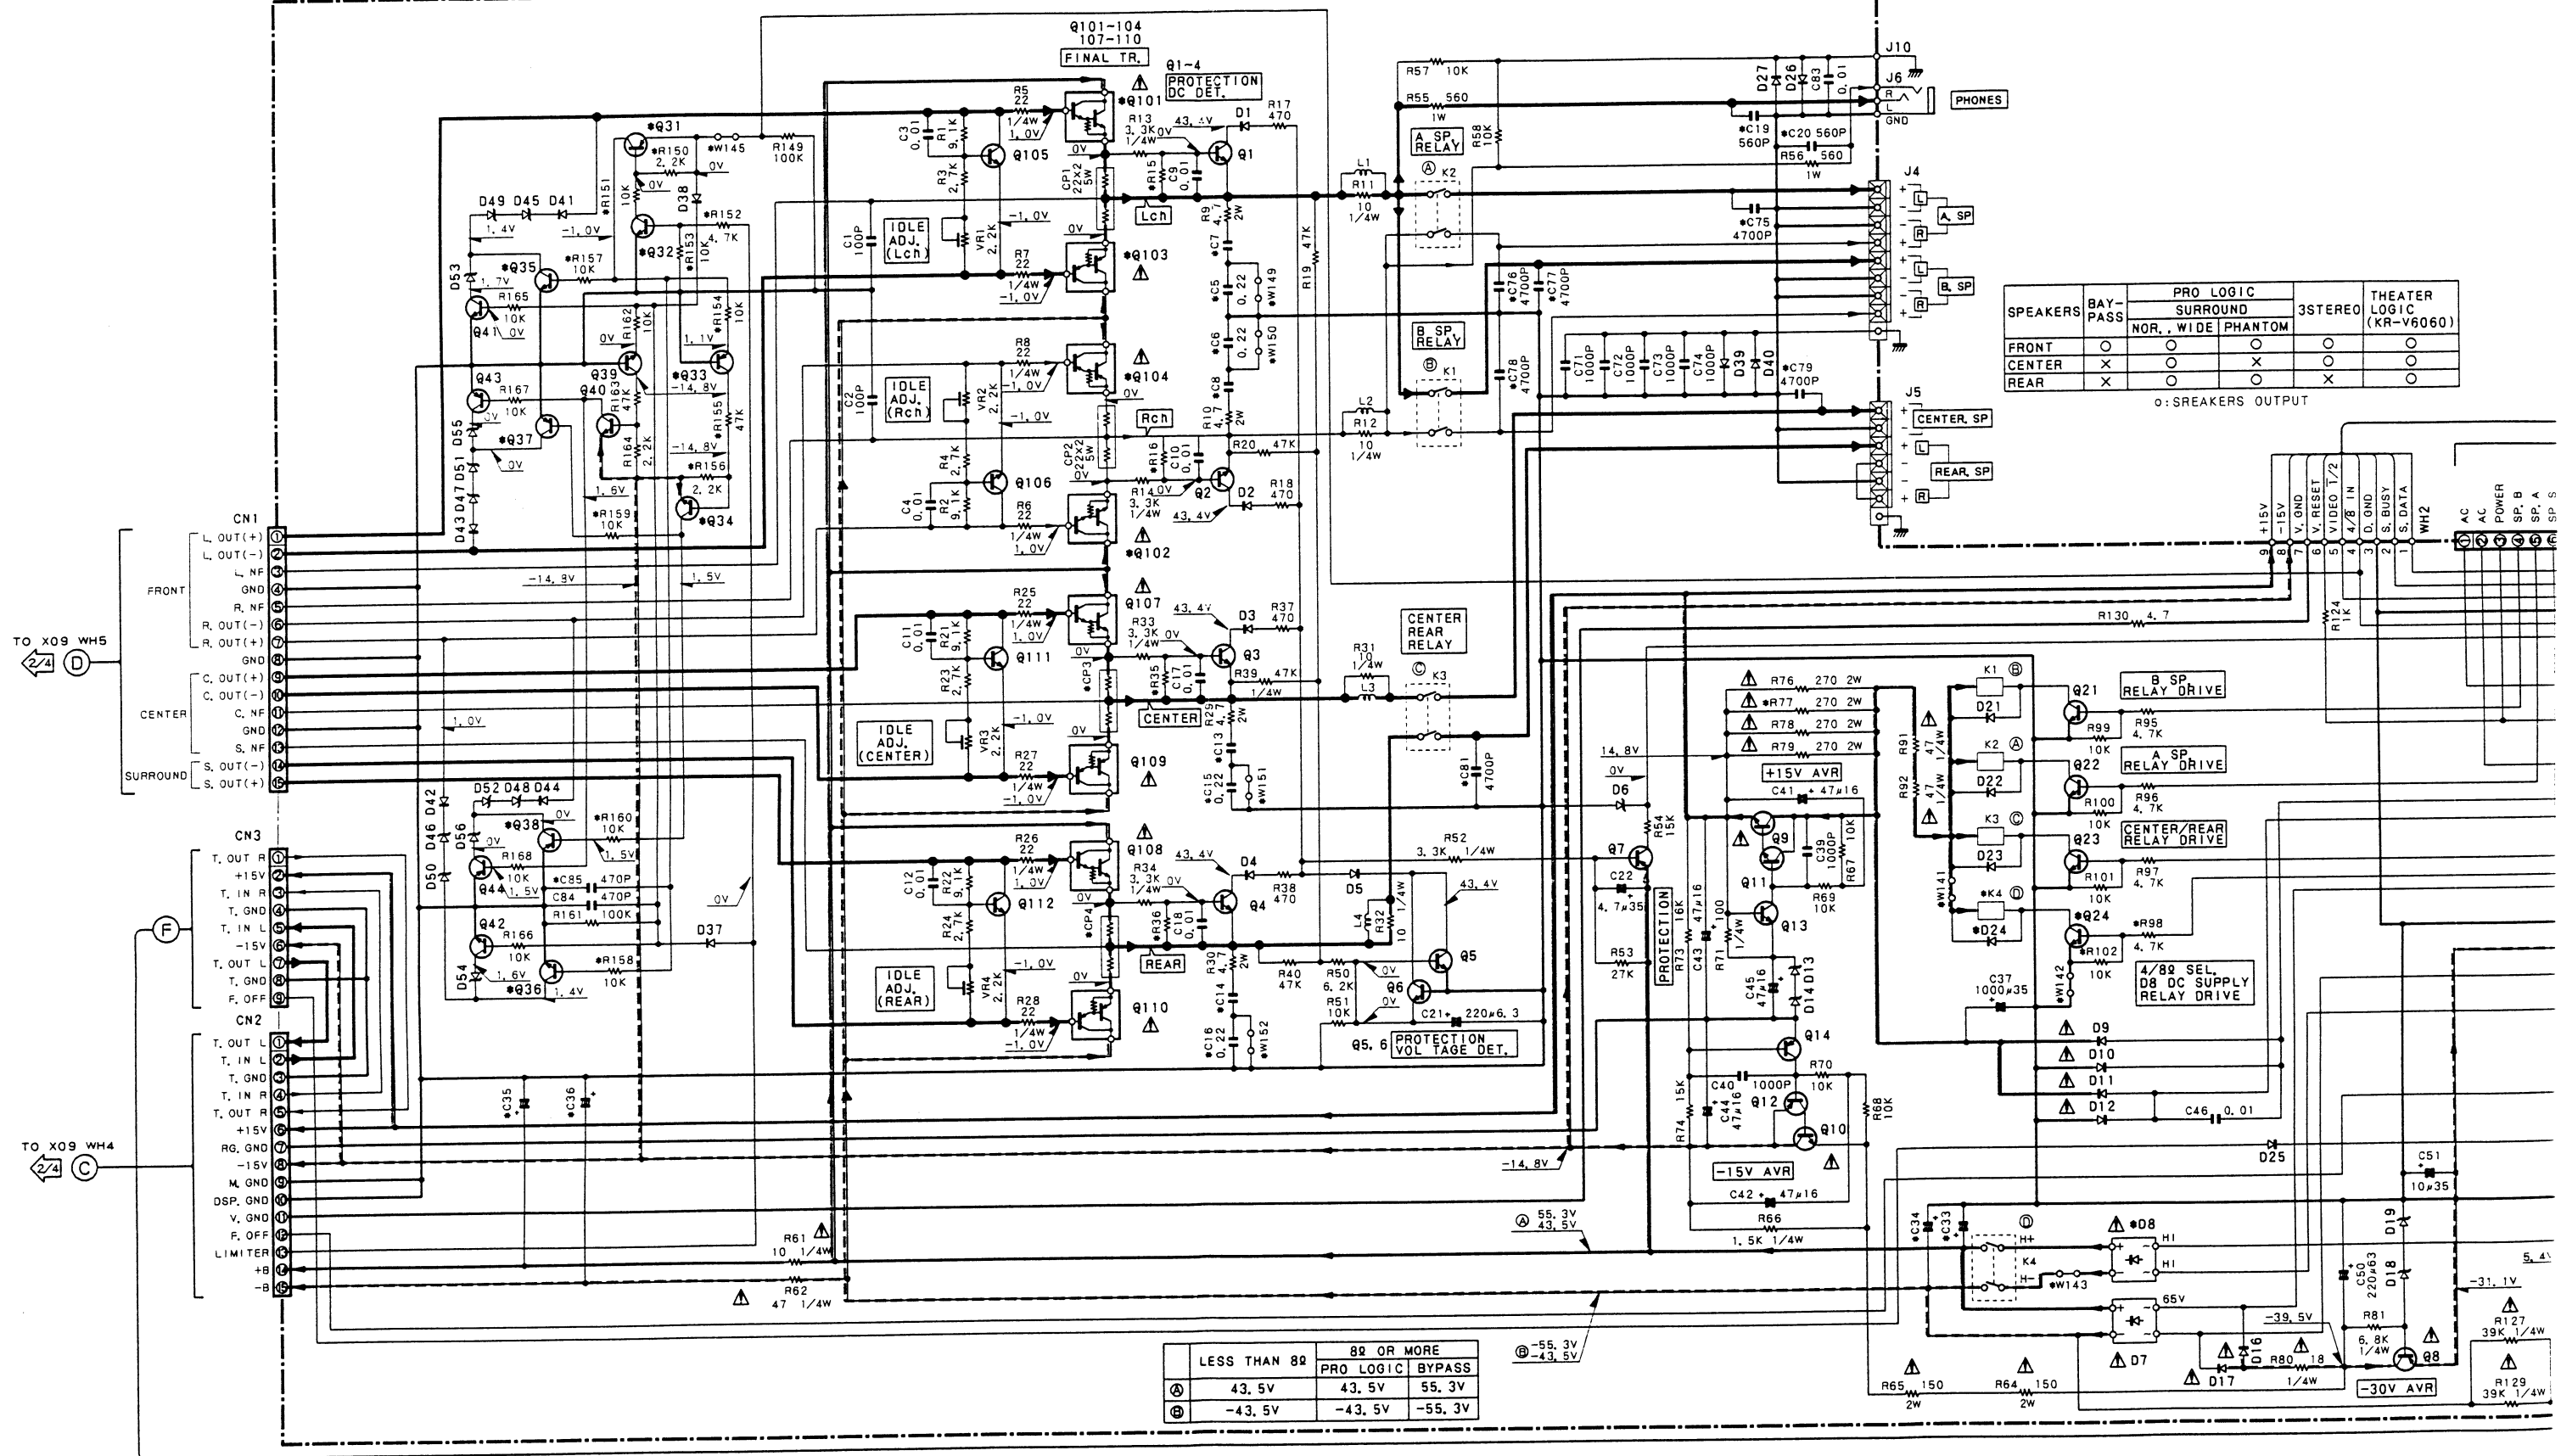


Ref. NO. DESTINATION		CN7, 8 S2	CN9, 10	Q24, 31-38	Q8, 24	C7, 8, 13, 14	C5, 6 15, 16	W149- 152	C19, 20	C33, 34	C35	C36	C47, 48 85	C49, 52, 75-79 81	R15, 16	R35, 36	R77	R98, 152	R102, 151, 153 154, 157-160	R119	R150, 156	R155	R179	CP3, 4	J1	J3	J11, 12	K4	S1	Q101, 102	Q103, 104																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
KR-V6060	X07-277	0-10 K, R	NO	NO	YES	YES	0.1 μ	NO	NO	6800 μ71	10 μ100	330 μ100	YES	NO	910	680	NO	YES	YES	3, 3M 1/2W	YES	YES	YES	0.33×2 5W	NO	YES	NO	YES	YES	2SD2222BT	2SB1470B																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
		1-01 P						YES						NO			YES								YES	NO	YES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
		2-70 E						YES						NO			YES								YES	NO	YES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
	X07-278	0-21 M	YES	NO			0.1 μ	NO	YES					NO	YES	NO	NO			YES					NO	NO	3, 3M 1/2W					NO	YES	NO	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
		2-91 Y						YES	NO						YES	YES	YES			YES					YES	YES	YES					YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
		0-51 T						NO	YES						NO	YES	NO			YES					NO	YES	NO					YES	NO	YES	NO	YES	NO	YES	NO	YES	NO	YES	NO	YES	NO	YES	NO	YES	NO	YES	NO	YES	NO																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
KR-V5560	X07-277	0-11 K, R	NO	NO	NO	NO	0.1 μ	NO	YES	NO	6800 μ63	10 μ63	330 μ63	NO	NO	1.1K	1.1K	NO	NO	NO	3, 3M 1/2W	NO	NO	NO	0.22×2 5W	NO	YES	NO	NO	NO	2SD2255BT	2SB1493B																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
		1-02 P						YES	NO																	YES	YES	YES					YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
		0-22 M						YES	NO																	YES	YES	YES					YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	X07-278	2-92 Y	YES	NO			0.1 μ	NO	YES	NO						YES	NO				NO					YES	NO	NO					1.1K	1.1K	NO	NO	NO	3, 3M 1/2W	NO	NO	NO	0.22×2 5W	NO	YES	NO	NO	NO	2SD2255BT	2SB1493B																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		0-71 X						NO	YES							YES	YES				YES					YES	YES	YES					YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES					YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES


IC1	: NJM2279D	D1-5, 28, 29	: HSS104A or
Q1-6, 35, 36	: 2SC1845 (F, E)	41-44	: 1SS131
41, 42		D6, 53-56	: RD5, 1ES (B2) or
Q7, 37, 38	: 2SA992 (F, E)	60, 61	: HZS5, 1N (B2)
43, 44		D7, 8	: D5SBA20F03 or
Q8	: 2SA1534A (R, S)		: RBV-602LFA
Q9, 10	: 2SD2374 or 2SD2012	D9-12, 16, 17	: S5688B or
	or 2SD2061	30-33	: 1SR139-100
Q11, 13, 21-24	: 2SC1740S (Q, R)	D13, 34	: RD6, 2ES (B2) or
32, 34, 40	or 2SC2785 (F, E)		: HZS6, 2N (B2)
Q12, 14, 31	: 2SA933S (Q, R)	D14	: RD8, 2ES (B2) or
33, 39	or 2SA1175 (F, E)		: HZS8, 2N (B2)
Q25	: 2SC3940A (R, S)	D15	: RD2, 7ES (B2) or
Q26	: 2SC2003 (L, K)		: HZS2, 7N (B2)
Q101, 102	: *	D18, 19	: RD16ES (B2) or
Q103, 104	: *		: HZS16N (B2)
Q105, 106	: 2SC4137F19 (V, W)	D21-27, 35, 37-40	: HSS104 or
111, 112		58, 59, 62, 63	: 1SS133
Q107, 108	: 2SD2255BT	D45-52	: RD13ES (B2) or
			: HZS13N (B2)


Ref. NO.	DESTINATION	WH3	WH6-12	WH13, 14	W141-143 145	W148	W153	W154	F1	F2	F3	F6
KR-V6060	X07-277	0-10 K, R	NO	NO	NO	YES	NO	YES	6A 125V	NO	NO	1A 250V
	X07-278	1-01 P	YES	YES	YES	NO	YES	NO	T3, 15A L 250V	T3, 15A L 250V	T2, 5A L 250V	T1A L 250V
		2-70 E	NO	NO	NO	YES	NO	YES	NO	NO	NO	NO
		0-21 M	NO	NO	NO	YES	NO	YES	NO	NO	NO	NO
KR-V5560	X07-277	0-11 K, R	NO	NO	NO	YES	NO	YES	6A 125V	NO	NO	1A 250V
	X07-278	1-02 P	YES	YES	NO	NO	YES	NO	T3, 15A L 250V	T3, 15A L 250V	T2, 5A L 250V	T1A L 250V
		0-22 M	NO	NO	NO	YES	NO	YES	NO	NO	NO	NO
		2-92 Y	NO	NO	NO	YES	NO	YES	NO	NO	NO	NO
KR-V694	X07-277	0-11 K, R	NO	NO	NO	YES	NO	YES	6A 250V	NO	NO	1A 250V
	X07-278	1-02 P	YES	YES	NO	NO	YES	NO	T3, 15A L 250V	T3, 15A L 250V	T2, 5A L 250V	T1A L 250V
		0-22 M	NO	NO	NO	YES	NO	YES	NO	NO	NO	NO
		2-92 Y	NO	NO	NO	YES	NO	YES	NO	NO	NO	NO

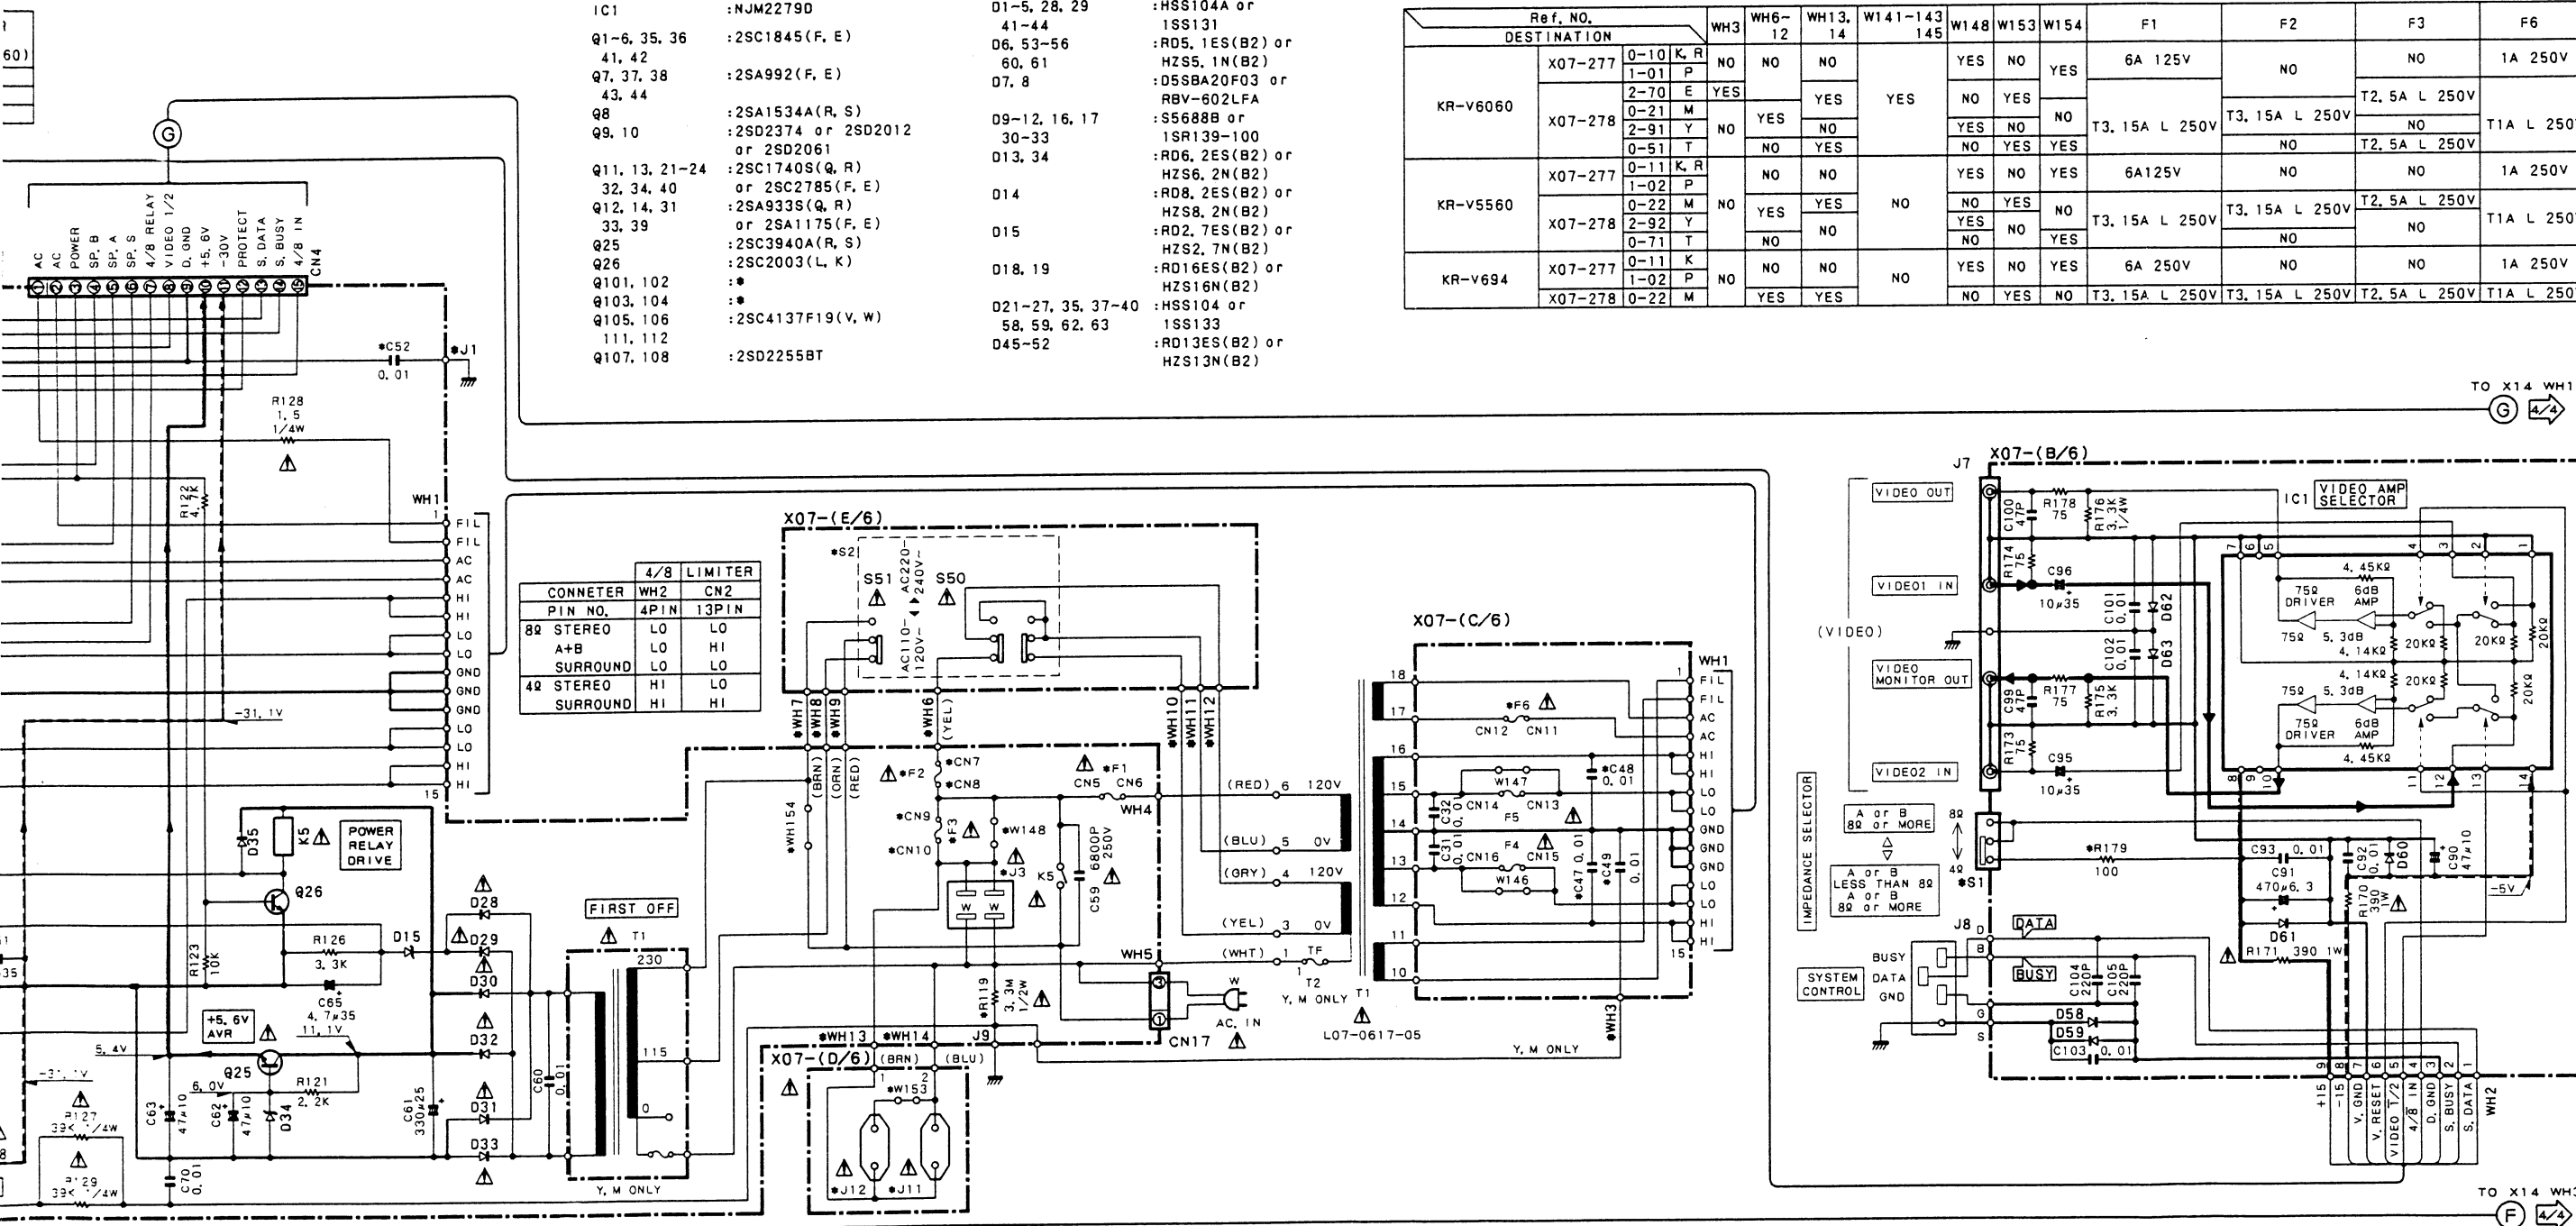

— SIGNAL LINE
— GND LINE
— +B LINE
— -B LINE

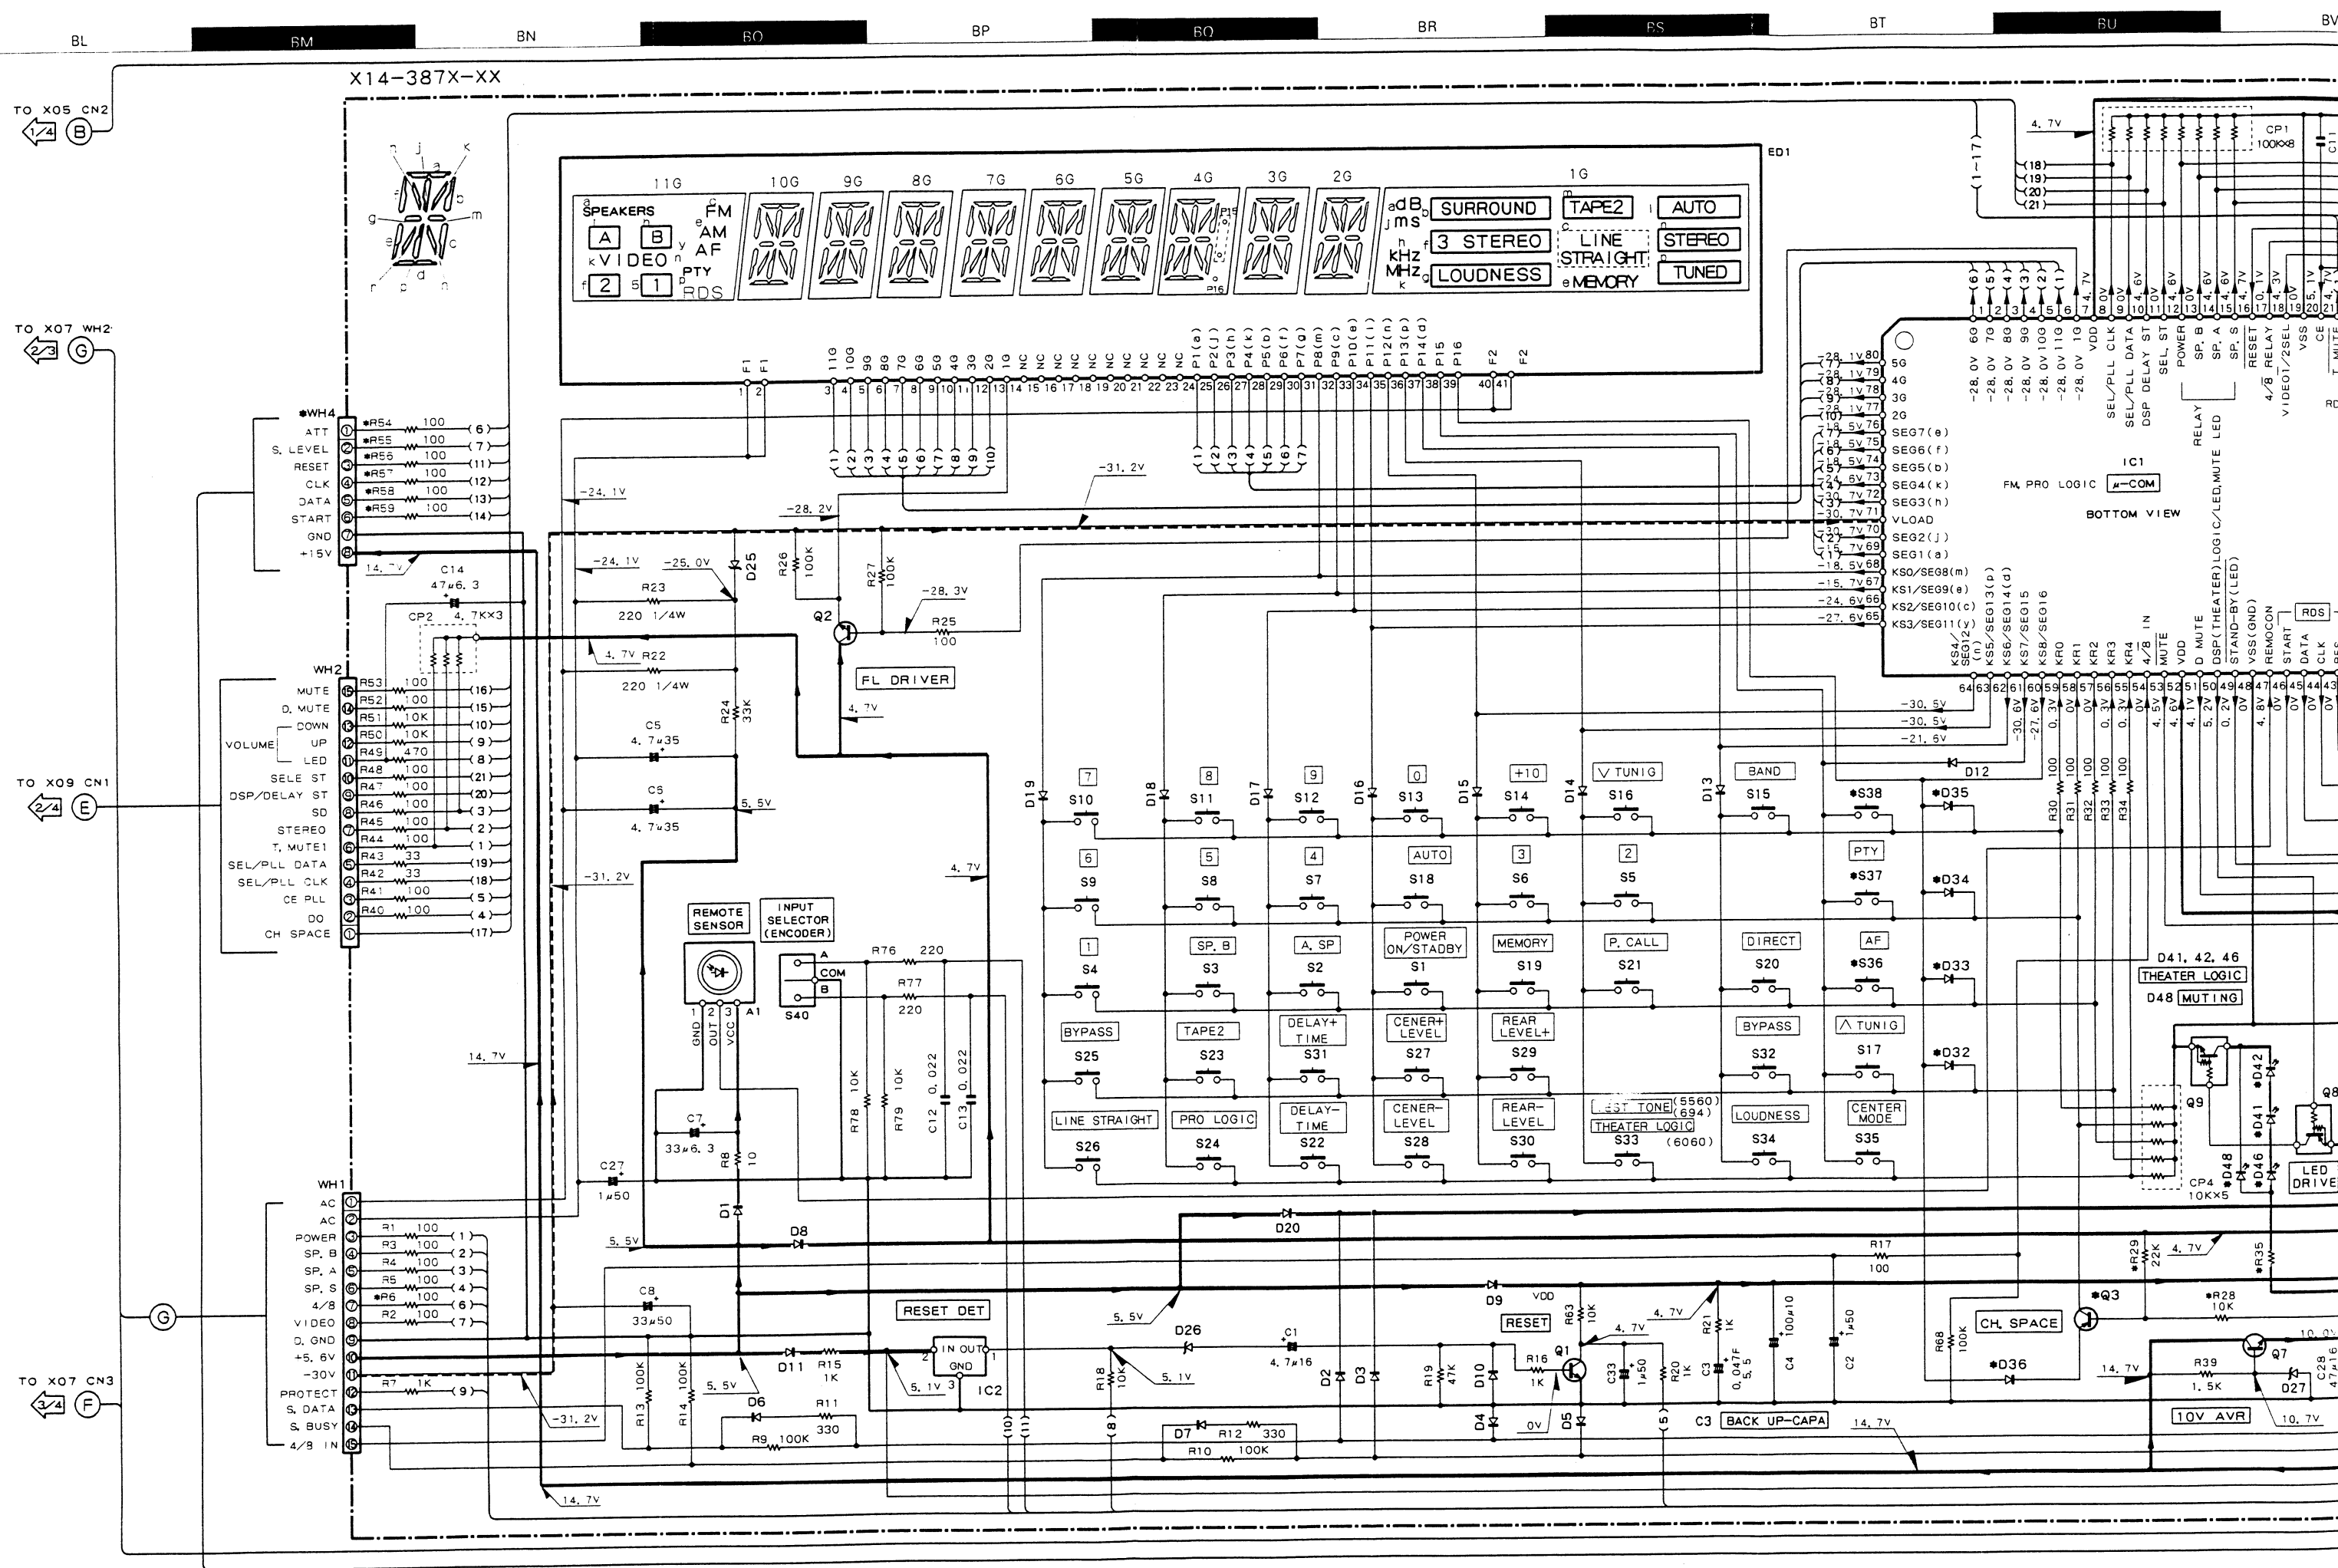



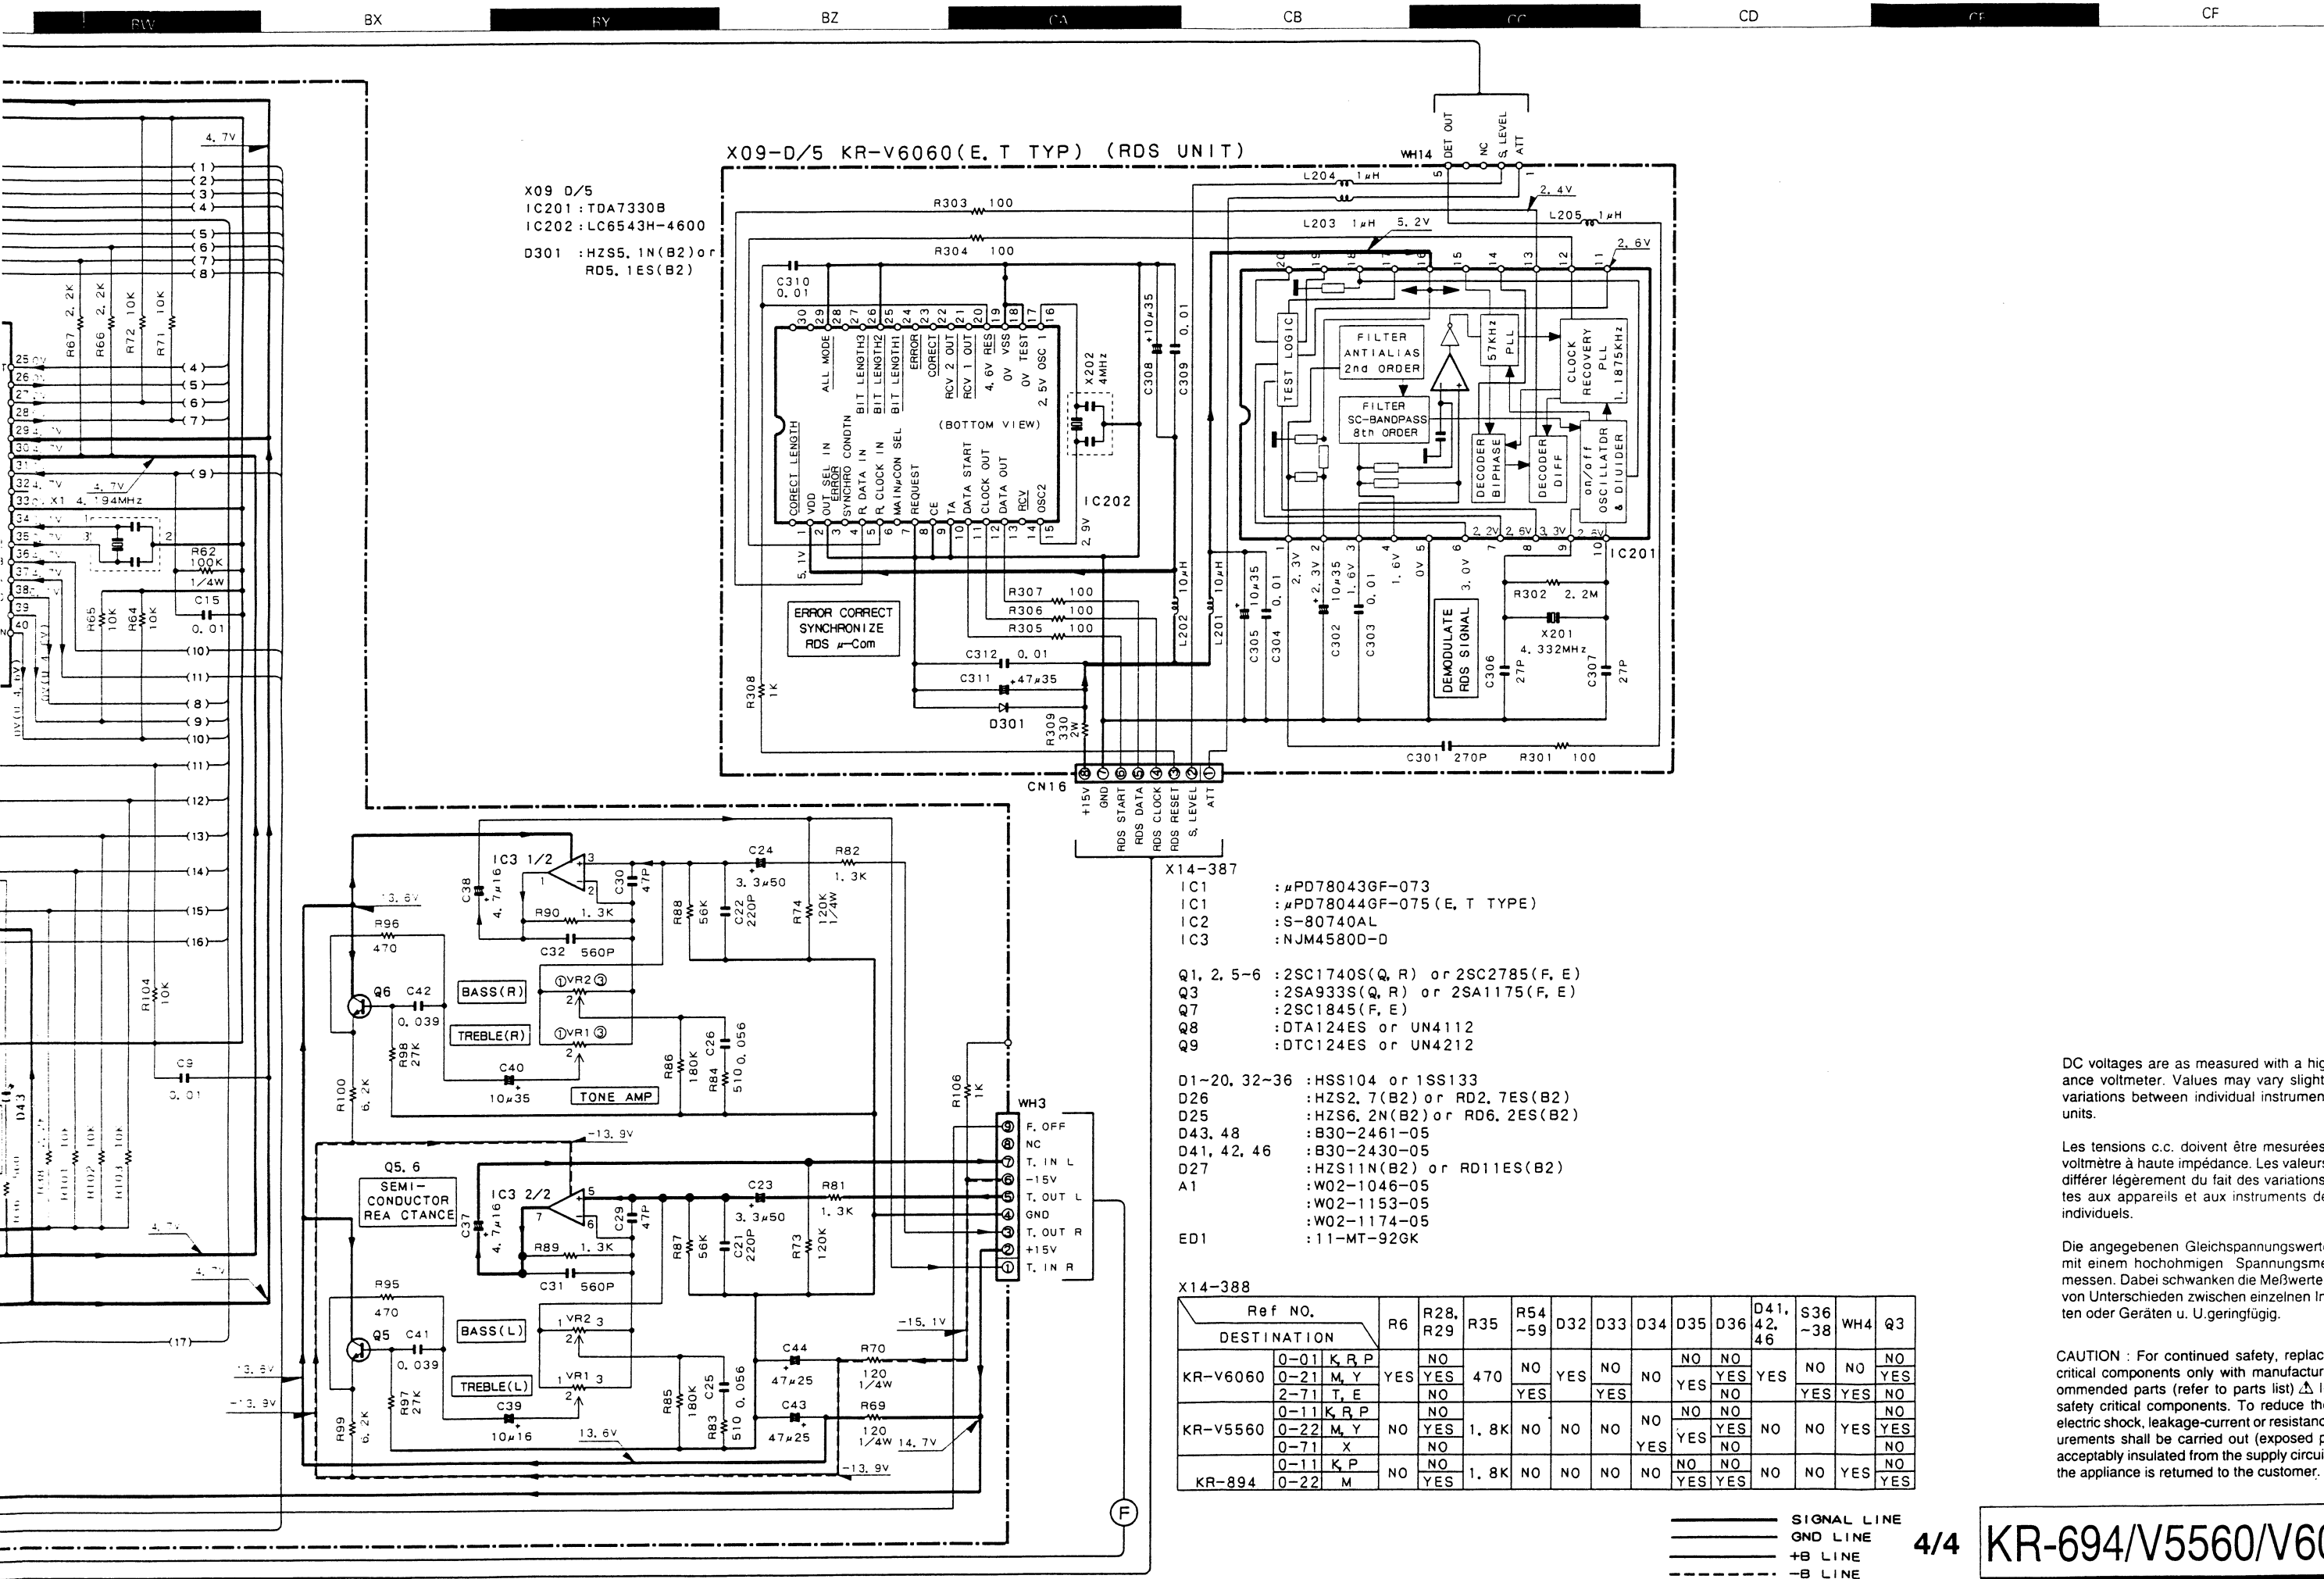

- X14-387
- IC1 : μ PD78043GF-073
 IC2 : μ PD78044GF-075 (E, T TYPE)
 IC3 : S-80740AL
 IC4 : NJM4580D-D
- Q1, 2, 5-6 : 2SC1740S(Q, R) or 2SC2785(F, E)
 Q3 : 2SA933S(Q, R) or 2SA1175(F, E)
 Q7 : 2SC1845(F, E)
 Q8 : DTA124ES or UN4112
 Q9 : DTC124ES or UN4212
- D1-20, 32-36 : HSS104 or 1SS133
 D26 : HZS2.7(B2) or RD2.7ES(B2)
 D25 : HZS6.2N(B2) or RD6.2ES(B2)
 D43, 48 : B30-2461-05
 D41, 42, 46 : B30-2430-05
 D27 : HZS11N(B2) or RD11ES(B2)
 A1 : W02-1046-05
 W02-1153-05
 W02-1174-05
 ED1 : 11-MT-92GK

X14-388

Ref NO.	DESTINATION	R6	R28, R29	R35	R54 ~59	D32	D33	D34	D35	D36	D41, 42, 46	S36 ~38	WH4	Q3
KR-V6060	0-01 K, R, P	YES	YES	470	NO	YES	NO	NO	NO	NO	YES	NO	NO	NO
	0-21 M, Y	YES	YES	470	NO	YES	NO	NO	YES	YES	YES	YES	YES	YES
	2-71 T, E	NO	NO	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
KR-V5560	0-11 K, R, P	NO	YES	1.8K	NO	NO	NO	NO	NO	NO	NO	NO	YES	YES
	0-22 M, Y	NO	YES	1.8K	NO	NO	NO	NO	YES	YES	NO	NO	YES	YES
	0-71 X	NO	NO	NO	NO	NO	NO	YES	YES	YES	NO	NO	NO	NO
KR-894	0-11 K, P	NO	NO	1.8K	NO	NO	NO	NO	NO	NO	NO	NO	YES	NO
	0-22 M	YES	YES	1.8K	NO	NO	NO	NO	YES	YES	NO	NO	YES	YES

DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

CAUTION : For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list) Δ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

EXPLODED VIEW (UNIT)



KR-694/V5560/V6060

PARTS LIST

UNIT LIST

KR-694

DESTINATION		TUNER UNIT	MAIN AMP UNIT	AUDIO UNIT	DISPLAY UNIT
Singapore made	K	X05-4460-11	X07-2770-11	X09-3940-11	X14-3880-11
	P	X05-4460-11	X07-2771-02	X09-3940-11	X14-3880-11
	M	X05-4460-21	X07-2780-22	X09-3940-11	X14-3880-22
Malaysia made	K	X05-4460-11	X07-2770-11	X09-3940-11	X14-3880-11
	P	X05-4460-11	X07-2771-02	X09-3940-11	X14-3880-11

KR-V5560

DESTINATION		TUNER UNIT	MAIN AMP UNIT	AUDIO UNIT	DISPLAY UNIT
Singapore made	K	X05-4460-11	X07-2770-11	X09-3940-11	X14-3880-11
	P	X05-4460-11	X07-2771-02	X09-3940-11	X14-3880-11
	Y	X05-4460-21	X07-2782-92	X09-3940-11	X14-3880-22
	M	X05-4460-21	X07-2780-22	X09-3940-11	X14-3880-22
	X	X05-4460-71	X07-2780-11	X09-3940-11	X14-3880-71
	R	X05-4460-11	X07-2770-11	X09-3940-11	X14-3880-11
Malaysia made	K	X05-4460-11	X07-2770-11	X09-3940-11	X14-3880-11
	P	X05-4460-11	X07-2771-02	X09-3940-11	X14-3880-11
	R	X05-4460-11	X07-2770-11	X09-3940-11	X14-3880-11

KR-V6060

DESTINATION		TUNER UNIT	MAIN AMP UNIT	AUDIO UNIT	DISPLAY UNIT
Singapore made	K	X05-4460-11	X07-2770-10	X09-3940-10	X14-3880-10
	P	X05-4460-11	X07-2771-01	X09-3940-10	X14-3880-10
	R	X05-4460-11	X07-2770-10	X09-3940-10	X14-3880-10
	Y	X05-4460-21	X07-2782-91	X09-3940-10	X14-3880-21
	M	X05-4460-21	X07-2780-21	X09-3940-10	X14-3880-21
	T	X05-4472-72	X07-2780-51	X09-3942-71	X14-3882-71
	E	X05-4472-72	X07-2782-70	X09-3942-71	X14-3882-71
	K	X05-4460-11	X07-2770-10	X09-3940-10	X14-3880-10
Malaysia made	P	X05-4460-11	X07-2771-01	X09-3940-10	X14-3880-10
	R	X05-4460-11	X07-2770-10	X09-3940-10	X14-3880-10

No.1		KR-694		No.1	
Ref. No.	Address	Parts No.	Description	Desti- nation	Re- marks
601	1A	A01-3098-11	METALLIC CABINET		
602	3A	A60-0527-11	PANEL		
603	1B	A70-0964-05	REMOTE CONTROLLER ASSY(-R0502)		
604	1B	A09-0170-08	BATTERY COVER		
615	3A	B03-2887-13	DRESSING PLATE	K	
-	-	B46-0092-33	WARRANTY CARD	P	
-	-	B46-0121-33	WARRANTY CARD	K	
-	-	B46-0197-00	QUESTIONNAIRE CARD	K	
-	-	B58-0964-03	CAUTION CARD (UL)	K	
-	-	B58-0965-03	CAUTION CARD (P.T.X TYPE)	P	
-	-	B58-0966-03	CAUTION CARD (ELM TYPE)	M	
-	-	B60-1453-00	INSTRUCTION MANUAL (ENGLISH)	P	
-	-	B60-1454-00	INSTRUCTION MANUAL (FRENCH)	P	
-	-	B60-1455-00	INSTRUCTION MANUAL (CHINESE)	M	
-	-	B60-1456-00	INSTRUCTION MANUAL (SPANISH)	M	
620	1B	E03-0115-05	AC PLUG ADAPTER	M	
621	1D	E30-2592-15	AC POWER CORD	M	
621	1D	E30-2650-05	AC POWER CORD	KPR	
621	1D	E30-2650-05	AC POWER CORD	P	
631	2B	F20-1297-05	INSULATING SHEET (FRONT)		
632	2B, 2C	F20-1297-05	INSULATING SHEET (CENTER, REAR)		
633	2B	F20-1392-04	INSULATING SHEET	M	
634	2D	F20-1393-04	INSULATING SHEET		
-	-	H10-5676-02	POLYSTYRENE FOAMED FIXTURE (L)	KPM	
-	-	H10-5677-02	POLYSTYRENE FOAMED FIXTURE (R)	KPM	
-	-	H10-5680-02	POLYSTYRENE FOAMED FIXTURE (L)	KP	
-	-	H10-5681-02	POLYSTYRENE FOAMED FIXTURE (R)	KP	
-	-	H11-0061-04	POLYSTYRENE FOAMED BOARD		
-	-	H13-0147-14	CARTON BOARD		
-	-	H25-0232-04	PROTECTION BAG (235X350X0.03)		
-	-	H25-1514-04	PROTECTION BAG		
-	-	H50-0931-04	ITEM CARTON CASE	KP	
-	-	H50-0932-04	ITEM CARTON CASE	H	
-	-	H50-0987-04	ITEM CARTON CASE	KP	
638	3D	J02-0366-15	FOOT		
640	2D	J19-3208-05	UNIT HOLDER		
641	2C	J19-3326-15	UNIT HOLDER		
642	2C, 2D	J19-3657-04	UNIT HOLDER USABLE J19-3609-04		
643	1B	J19-3645-04	AM LOOP ANT. STAND		
648	1D	J42-0083-05	POWER CORD BUSHING		
-	-	J61-0307-05	WIRE BAND		
652	3B	K29-5843-02	KN0B (SURROUND)		
653	3A	K29-5834-13	KN0B (10KEY)		
654	2A, 3A	K29-5837-02	KN0B (POWER, TUNING)		
655	3A	K29-5836-04	KN0B (BASS, TREBLE)		
656	3A	K29-5839-14	KN0B (BRANGE)		
657	3A	K29-5860-04	KN0B ASSY (VOLUME)		
658	3A	K29-5866-04	KN0B (INPUT SELECTOR)		
660	2C	L07-0848-05	POWER TRANSFORMER	P	
660	2C	L07-0851-05	POWER TRANSFORMER	M	

KR-694/V5560/V6060

PARTS LIST

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.3

Ref. No. 参照番号	Address 位置	New Parts 新部品	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向備考
-	-	*	H50-0925-04	ITEM CARTON CASE	M
-	-	*	H50-0926-04	ITEM CARTON CASE	KPR
638	3D		J02-0366-15	FOOT	
640	2D		J19-3208-05	UNIT HOLDER	
641	2C		J19-3326-15	UNIT HOLDER	
642	2C, 2D	*	J19-3657-04	UNIT HOLDER (USABLE J19-3609-04)	
643	1B	*	J19-3645-05	AM LOOP ANT. STAND	
648	1D		J42-0083-05	POWER CORD BUSHING	
-	-		J61-0307-05	WIRE BAND	
652	3B	*	K29-5843-02	KNOB (SURROUND)	
653	3A		K29-5834-13	KNOB (10KEY)	
654	2A, 3A		K29-5837-02	KNOB (POWER, TUNING)	
655	3A		K29-5838-04	KNOB (BASS, TREBLE)	
656	3A		K29-5839-14	KNOB (BALANCE)	
657	3A	*	K29-5860-04	KNOB ASSY (VOLUME)	
658	3A		K29-5866-04	KNOB (INPUT SELECTOR)	
660	2C	*	L07-0848-05	POWER TRANSFORMER	P
660	2C	*	L07-0850-05	POWER TRANSFORMER	X
660	2C	*	L07-0851-05	POWER TRANSFORMER	YM
660	2C	*	L07-0852-05	POWER TRANSFORMER	KR
A			N08-0128-35	BINDING POST (EARTH)	YMX
A			N09-2909-05	TAPPIE SCREW	KPR
B			N09-0333-05	TAPPING SCREW (3X12)	
C			N09-2907-05	SEMS (TAPPIE SCREW) (3X14)	
D			N82-2608-46	BINDIC HEAD TAPITE SCREW	
E			N89-3008-45	BINDING HEAD TAPITE SCREW	
F			N89-3008-46	BINDING HEAD TAPITE SCREW	
G			N89-3018-46	BINDING HEAD TAPITE SCREW	
H			N29-0265-15	PUSH RIVET	
665	1B		T90-0175-05	T TYPE ANTENNA	
666	1B		T90-0195-05	LOOP ANTENNA	

KR-V6060

Ref. No. 参照番号	Address 位置	New Parts 新部品	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向備考
601	1A	*	A01-3098-11	METALLIC CABINET	KPYMR
602	3A	*	A60-0525-21	PANEL	TE
603	1B		A70-0962-15	REMOTE CONTROLLER ASSY (-R0702)	
603	1B		A70-0963-05	REMOTE CONTROLLER ASSY (-R0703)	
604	1B		A09-0146-08	BATTERY COVER	
615	3A	*	B03-2871-13	DRESSING PLATE	KPYMR
615	3A	*	B03-2886-13	DRESSING PLATE	TE
-	-		B46-0092-33	WARRANTY CARD	K
-	-		B46-0094-03	WARRANTY CARD	Y
-	-		B46-0095-03	WARRANTY CARD	Y
-	-		B46-0121-33	WARRANTY CARD	P
-	-		B46-0197-00	QUESTIONNAIRE CARD	KR
-	-		B46-0310-03	WARRANTY CARD	TE
-	-		B58-0513-04	CAUTION CARD (PRESET220-240)	Y
-	-	*	B58-0964-03	CAUTION CARD (UL)	KYR
-	-	*	B58-0965-03	CAUTION CARD (P, T, X)	P
-	-	*	B58-0966-03	CAUTION CARD (E, I, M)	MTE
-	-	*	B58-0970-03	CAUTION CARD (R, TYPE)	R
-	-		B60-1441-00	INSTRUCTION MANUAL (ENGLISH)	KPYMR
-	-		B60-1442-00	INSTRUCTION MANUAL (ENGLISH)	TE

4-KR-694
5-KR-V5560
6-KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
T:England
X:Australia
M:Other Areas
△ indicates safety critical components.

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.2

Ref. No. 参照番号	Address 位置	New Parts 新部品	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向備考
660	2C	*	L07-0852-05	POWER TRANSFORMER	K
A			N08-0128-35	BINDING POST (EARTH)	M
A			N09-2909-05	TAPPIE SCREW (3X12)	KP
B			N09-0333-05	TAPPING SCREW (3X14)	
C			N09-2907-05	SEMS (TAPITE SCREW) (3X14)	
D			N82-2608-46	BINDIC HEAD TAPITE SCREW	
E			N89-3008-45	BINDING HEAD TAPITE SCREW	
F			N89-3008-46	BINDING HEAD TAPITE SCREW	
G			N89-3018-46	BINDING HEAD TAPITE SCREW	
H			N29-0265-15	PUSH RIVET	
665	1B		T90-0175-05	T TYPE ANTENNA	
666	1B		T90-0195-05	LOOP ANTENNA	

KR-V5560

Ref. No. 参照番号	Address 位置	New Parts 新部品	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向備考
601	1A	*	A01-3098-11	METALLIC CABINET	
602	3A	*	A60-0526-21	PANEL	
603	1B	*	A70-0964-05	REMOTE CONTROLLER ASSY (-R0502)	
604	1B		A09-0170-08	BATTERY COVER	
615	3A	*	B03-2887-13	DRESSING PLATE	K
-	-		B46-0092-33	WARRANTY CARD	Y
-	-		B46-0094-03	WARRANTY CARD	Y
-	-		B46-0095-03	WARRANTY CARD	Y
-	-	*	B46-0096-43	WARRANTY CARD	X
-	-		B46-0121-33	WARRANTY CARD	P
-	-		B46-0197-00	QUESTIONNAIRE CARD	KR
-	-		B58-0513-04	CAUTION CARD (PRESET220-240)	Y
-	-	*	B58-0964-03	CAUTION CARD	KYR
-	-	*	B58-0965-03	CAUTION CARD	P
-	-	*	B58-0966-03	CAUTION CARD	MX
-	-	*	B58-0970-03	CAUTION CARD	RR
-	-	*	B60-1453-00	INSTRUCTION MANUAL (ENGLISH)	
-	-	*	B60-1454-00	INSTRUCTION MANUAL (FRENCH)	P
-	-	*	B60-1455-00	INSTRUCTION MANUAL (CHINESE)	M
-	-	*	B60-1456-00	INSTRUCTION MANUAL (SPANISH)	MR
620	1B		E03-0115-05	AC PLUG ADAPTER	M
621	1D		E30-2592-15	AC POWER CORD	M
621	1D		E30-2605-05	AC POWER CORD	Y
621	1D		E30-2650-05	AC POWER CORD	KPR
621	1D		E30-2650-05	AC POWER CORD	
621	1D		E30-2717-05	AC POWER CORD	X
631	2B		F20-1297-05	INSULATING SHEET (FRONT)	
632	2B, 2C		F20-1297-05	INSULATING SHEET (CENTER, REAR)	
633	2B	*	F20-1392-04	INSULATING BOARD	YMX
634	2D		F20-1393-04	INSULATING SHEET	
-	-	*	H10-5676-02	POLYSTYRENE FOAMED FIXTURE (L)	KPYMR
-	-	*	H10-5677-02	POLYSTYRENE FOAMED FIXTURE (R)	KPYMR
-	-	*	H10-5680-02	POLYSTYRENE FOAMED FIXTURE (L)	KPR
-	-	*	H10-5681-02	POLYSTYRENE FOAMED FIXTURE (R)	KPR
-	-	*	H11-0061-04	POLYSTYRENE FOAMED BOARD	
-	-	*	H13-0147-14	CARTON BOARD	
-	-	*	H25-0232-04	PROTECTION BAG (235X350X0.03)	
-	-	*	H35-0361-04	PROTECTION BAG	
-	-	*	H50-0924-04	ITEM CARTON CASE	KPYR

4-KR-694
5-KR-V5560
6-KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
T:England
X:Australia
M:Other Areas
△ indicates safety critical components.

KR-694/V5560/V6060

PARTS LIST

✱ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.5

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向備考
660	2C	* L07-0847-05	POWER TRANSFORMER	KR
A		N06-0128-35	BINDING POST (EARTH)	YME
B		N09-2909-05	TAPPING SCREW (3X12)	KPR
C		N04-0333-05	SEMS (TAPITE SCREW)(3X14)	
D		N04-2907-05	BINDIG HEAD TAPITE SCREW	
E		N89-3008-45	BINDING HEAD TAPITE SCREW	
F		N89-3008-46	BINDING HEAD TAPITE SCREW	
G		N89-3018-46	BINDING HEAD TAPITE SCREW	
H		N29-0265-15	PUSH RIVET	
665	1B	T90-0175-05	T TYPE ANTENNA	
666	1B	T90-0195-05	L00P ANTENNA	
667	1B	T90-0195-05	ANTENNA ADAPTOR	TE
TUNER UNIT(X05-446X-XX) : Except E,T				
C1		CK73FB1H103K	CHIP C	
C4		CE04LW1A470M	ELECTR0	0.010UF K
C5		CK73FB1H103K	CHIP C	0.010UF K
C8		CK73FB1H103K	CHIP C	0.010UF K
C10		CK73FB1H122K	CHIP C	1200PF K
C11		CE04LW1H4R7M	ELECTR0	4.7UF 50WV
C13		CE04LW1H010M	ELECTR0	1.0UF 50WV
C14		CE04LW1H2R2M	ELECTR0	2.2UF 50WV
C21		C092FM1H163J	MYLAR	0.016UF J
C21		C092FM1H243J	MYLAR	0.024UF J
C23		CE04LW1H010M	ELECTR0	1.0UF 50WV
C24		CE04LW1H3R3M	ELECTR0	3.3UF 50WV
C25		CE04LW1V100M	ELECTR0	10UF 35WV
C27		CK73FB1E473K	CHIP C	0.047UF K
C28		CE04LW1V100M	ELECTR0	10UF 35WV
C31		CE04LW1A470M	ELECTR0	47UF 10WV
C32		CK73FB1H103K	CHIP C	0.010UF K
C33		CK73FB1H220J	CHIP C	22PF J
C34		CK73FB1H220J	CHIP C	22PF J
C35		CK73FB1H471K	CHIP C	470PF K
C39		CE04LW1C470M	ELECTR0	47UF 16WV
C40		CK73FB1H223K	CHIP C	0.022UF K
C41		CE04LW1H010M	ELECTR0	1.0UF 50WV
C42		CK73FB1H103K	CHIP C	0.010UF K
C50		C91-0769-05	CERAMIC	0.01UF K
C51		CE04LW1H010M	ELECTR0	1.0UF 50WV
C52		CE04LW1C470M	ELECTR0	47UF 16WV
C57		CK73FB1H220J	CHIP C	22PF J
C65		CE04LW1H010M	ELECTR0	1.0UF 50WV
C66		CK73FB1H102K	CHIP C	1000PF K
C71		CE04LW1V100M	ELECTR0	10UF 35WV
C72		CE04LW1C470M	ELECTR0	47UF 16WV
C103-106		CE04LW1H47M	ELECTR0	0.47UF 50WV
C107		CK73FB1E473K	CHIP C	0.047UF K
C112		CE04LW1H101J	CHIP C	100PF J
C114		CK73FB1H681K	CHIP C	680PF K
C115		CK73FB1H101J	CHIP C	100PF J
C121-122		CE04LW1C470M	ELECTR0	47UF 16WV
C135-136		C092FM1H482J	MYLAR	4800PF J
C182		CE04LW1H150J	CHIP C	15PF J

4:KR-694
5:KR-V5560
6:KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
M:Other Areas
K:USA
T:England
X:Australia
Y:AFES(Europe)
Y:PX(Far East, Hawaii)
L:Scandinavia
Y:PF(East, Hawaii)
Y:AFES(Europe)

✱ indicates safety critical components

✱ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.4

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向備考
-		860-1443-00	INSTRUCTION MANUAL (FRENCH)	P
-		860-1444-00	INSTRUCTION MANUAL (CHINESE)	M
-		860-1445-00	INSTRUCTION MANUAL (GE,OU)	E
-		860-1446-00	INSTRUCTION MANUAL (SPANISH)	MR
-		860-1593-00	INSTRUCTION MANUAL (SPANISH)	E
-		860-1594-00	INSTRUCTION MANUAL (FR,IT)	E
620	1B	E03-0115-05	AC PLUG ADAPTER	M
621	1D	E30-2592-15	AC POWER CORD	ME
621	1D	E30-2650-05	AC POWER CORD	Y
621	1D	E30-2650-05	AC POWER CORD	KPR
621	1D	E30-2721-05	AC POWER CORD	T
630	1C	F20-1258-04	INSULATING BOARD (FRONT)	T
631	2B	F20-1284-05	INSULATING SHEET (CENTER, REAR)	
632	2B	F20-1297-05	INSULATING BOARD	
633	2B	F20-1392-04	INSULATING SHEET	
634	2D	F20-1393-04	INSULATING SHEET	YME
-		H10-5676-02	POLYSTYRENE FOAMED FIXTURE (L)	KPYMR
-		H10-5677-02	POLYSTYRENE FOAMED FIXTURE (R)	S
-		H10-5678-02	POLYSTYRENE FOAMED FIXTURE (L)	KPYMR
-		H10-5679-02	POLYSTYRENE FOAMED FIXTURE (R)	T
-		H10-5680-02	POLYSTYRENE FOAMED FIXTURE (L)	S
-		H10-5681-02	POLYSTYRENE FOAMED FIXTURE (R)	W
-		H11-0061-04	POLYSTYRENE FOAMED BOARD	KPYMR
-		H13-0147-14	CARTON BOARD	T
-		H13-0160-04	CARTON BOARD	KPYMR
-		H25-0232-04	PROTECTION BAG (235X350X0.03)	KPYMR
-		H25-0361-04	PROTECTION BAG	KPYMR
-		H25-0651-04	PROTECTION BAG (0232 PRINTED)	T
-		H25-0666-04	PROTECTION BAG (0361 PRINTED)	T
-		H50-0921-04	ITEM CARTON CASE	KPYMR
-		H50-0922-04	ITEM CARTON CASE	M
-		H50-0923-04	ITEM CARTON CASE	T
-		H50-0985-04	ITEM CARTON CASE	KPR
638	30	J02-0366-15	FOOT	KPYMR
639	30	J02-1040-05	UNIT HOLDER	TE
640	2D	J19-3208-05	UNIT HOLDER	
641	2C	J19-3326-15	UNIT HOLDER(USABLE J19-3609-04)	
642	2C,2D	J19-3657-04	UNIT HOLDER(USABLE J19-3609-04)	
643	1B	J19-3645-05	AM LOOP ANT. STAND	
648	1D	J42-0083-05	POWER CORD BUSHING	
-		J61-0307-05	WIRE BAND	
652	3B	K29-5833-02	KN08 (SURROUND)	TE
653	3A	K29-5834-13	KN08 (TUNEY)	KPYMR
654	2A,3A	K29-5836-02	KN08 (POWER, TUNING)	
654	2A,3A	K29-5837-02	KN08 (POWER, TUNING)	
655	3A	K29-5836-04	KN08 (BASS, TREBLE)	
656	3A	K29-5839-14	KN08 (BARANCE)	
657	3A	K29-5859-04	KN08 ASSY (VOLUME)	
658	3A	K29-5866-04	KN08 (INPUT SELECTOR)	
660	2C	L07-0843-05	POWER TRANSFORMER	P
660	2C	L07-0844-05	POWER TRANSFORMER	E
660	2C	L07-0845-05	POWER TRANSFORMER	T
660	2C	L07-0846-05	POWER TRANSFORMER	YM

4:KR-694
5:KR-V5560
6:KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
M:Other Areas
K:USA
T:England
X:Australia
Y:AFES(Europe)
Y:PX(Far East, Hawaii)
L:Scandinavia
Y:PF(East, Hawaii)
Y:AFES(Europe)

✱ indicates safety critical components

KR-694/V5560/V6060

PARTS LIST

✱ New Parts
Parts without Parts No. are not supplied
Les articles non mentionnés dans le Parts No. ne sont pas fournis
Teil ohne Parts No. werden nicht geliefert

No.7

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Re- marks 備考
C8		CK73FB1H682K	CHIP C	
C9		CK73FB1H103K	CHIP C	
C10		CC73FSL1H330J	CHIP C	
C11		CE04LW1V100M	ELECTRØ	35WV
C12		CE04LW1H010M	ELECTRØ	1.0UF 50WV
C13		CE04LW1H010M	ELECTRØ	0.33UF 50WV
C14		CE04LW1H010M	ELECTRØ	1.0UF 50WV
C15		CK73FB1H103K	CHIP C	0.01UF K
C16		C91-0769-05	CERAMIC	0.01UF K
C17		CK73FB1H223K	CHIP C	0.022UF K
C21, 22		CK73FB1H682K	CHIP C	6800PF K
C23		CE04LW1V100M	ELECTRØ	10UF 35WV
C25		CE04LW1V100M	ELECTRØ	10UF 35WV
C27		CE04LW1V100M	ELECTRØ	10UF 35WV
C28		CK73FB1E473K	CHIP C	0.047UF K
C31		CE04LW1A470M	ELECTRØ	47UF 10WV
C32		CK73FB1H103K	CHIP C	0.010UF K
C33		CC73FCH1H220J	CHIP C	22PF J
C34		CK73FB1H220J	CHIP C	22PF J
C35 - 38		CK73FB1H471K	CHIP C	470PF K
C39		CE04LW1C470M	ELECTRØ	47UF 16WV
C40		C492FM1H223J	MYLAR	0.022UF J
C41		CE04HWH2R2M	NP-ELEC	2.2UF 50WV
C42, 43		CK73FB1H103K	CHIP C	0.010UF K
C45, 46		CE04LW1V100M	ELECTRØ	10UF 35WV
C47, 48		CE04LW1H0R1M	ELECTRØ	0.1UF 50WV
C50		C91-0769-05	CERAMIC	0.01UF K
C51		CE04LW1H010M	ELECTRØ	1.0UF 50WV
C52		CE04LW1C470M	ELECTRØ	47UF 16WV
C56		CC73FCH1H220J	CHIP C	22PF J
C58, 59		CK73FB1H472K	CHIP C	4700PF K
C65		CE04LW1H010M	ELECTRØ	1.0UF 50WV
C66		C91-0769-05	CERAMIC	0.01UF K
C72		CE04LW1C470M	ELECTRØ	47UF 16WV
C107		CK73FB1E473K	CHIP C	0.047UF K
C121, 122		CE04LW1C470M	ELECTRØ	47UF 16WV
C123		CE04LW1H0R1M	ELECTRØ	0.1UF 50WV
C172		CC73FSL1H330J	CHIP C	33PF J
C173-175		CK73FB1H102K	CHIP C	1000PF K
C182		CC73FSL1H150J	CHIP C	15PF J
J1		E20-0321-05	LOCK TERMINAL BOARD	
J2		* F10-0921-14	SHIELDING PLATE	
CF1, 2		L72-0536-05	CERAMIC FILTER	
L1, 2		L40-1091-17	SMALL FIXED INDUCTOR(1UH)	
L3		L30-0496-05	PM IFT	
L4		L30-0497-05	FM IFT	
L5		L79-0125-05	LC FILTER	
L7		L30-0467-05	AM IFT	
L8, 9		L79-0790-05	LC FILTER	
L10		L40-1091-17	SMALL FIXED INDUCTOR(1UH)	
L103		L39-1309-05	COMBINATION COIL	
L106		L40-1091-17	SMALL FIXED INDUCTOR(1UH)	
X1		L77-1122-05	CRYSTAL RESONATOR(7.2MHZ)	

4:KR-694
5:KR-V5560
6:KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
M:Other Areas
K:USA
T:England
X:Australia
Y:AFES(Europe)
L:Scandinavia
Y:PX(Far East, Hawaii)
Y:AAFE(Europe)

Δ indicates safety critical components

✱ New Parts
Parts without Parts No. are not supplied
Les articles non mentionnés dans le Parts No. ne sont pas fournis
Teil ohne Parts No. werden nicht geliefert

No.6

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Re- marks 備考
J1		E20-0476-05	LOCK TERMINAL BOARD(4P)	
J2		F10-0920-14	SHIELDING PLATE	
CF1, 2		L72-0531-05	CERAMIC FILTER	
CF3		L72-0574-05	CERAMIC FILTER	
L7		L30-0467-05	AM IFT	
L10		L40-1091-17	SMALL FIXED INDUCTOR(1UH)	
L11		L40-1021-14	SMALL FIXED INDUCTOR(1.0MH, K)	
L12		L40-1091-17	SMALL FIXED INDUCTOR(1UH)	
L103		L39-1309-05	COMBINATION COIL	
L106		L40-1091-17	SMALL FIXED INDUCTOR(1UH)	
X1		L77-1122-05	CRYSTAL RESONATOR(7.2MHZ)	
X2		L78-0295-05	RESONATOR (19KHZ)	
R11		RS14KB3A820J	FL-PROOF RS 82 J 1W	
R31		RS14KB3D21J	FL-PROOF RS 220 J 2W	
R42		RD14N82E101J	RD 100 J 1/4W	
R111		RD14N82E470J	RD 47 J 1/4W	
R127, 128		RD14N82E101J	RD 100 J 1/4W	
W46		R92-0670-05	CHIP R 0 0HM	
W48		R92-0670-05	CHIP R 0 0HM	
S101		S62-0034-05	SLIDE SWITCH(CH, SPACE, EMPASIS)	YM
D3		HZS5-1N(82)	ZENER DIODE	
D3		RD5-1ES(82)	ZENER DIODE	
D4		HZS5-3N(82)	ZENER DIODE	
D4		RD3-3ES(82)	ZENER DIODE	
D7		MA110	DIODE	
D8		HSS104	DIODE	
D8		LS133	DIODE	
D11		HZS6-2N(82)	ZENER DIODE	
D11		RD8-2ES(82)	ZENER DIODE	
D111, 112		MA110	DIODE	
IC1		LA1831-KEN	ANALOG IC	
IC2		IC(PLL SYNTHESIZER)	IC(PLL SYNTHESIZER)	
IC12		NJM45650	IC(OP AMP X2)	
Q1		2SC2714(F, Ø)	TRANSISTOR	
Q2		2SC1845(F, E)	TRANSISTOR	
Q3		2SC1740S(Q, R)	TRANSISTOR	
Q3		2SC2785(F, E)	TRANSISTOR	
Q7		2SC412K	TRANSISTOR	
Q11		2SD631E, F	TRANSISTOR	
Q102		2SA1037K	TRANSISTOR	
Q104		2SA1037K	TRANSISTOR	
Q107, 108		2SC412K	TRANSISTOR	
Q109, 110		2SC412K	TRANSISTOR	
Q111		2SA1037K	TRANSISTOR	
DT1		W02-1167-05	FM FRONT-END ASSY	
TUNER UNIT(X05-447X-XX) : E.T type				
C1, 2		CK73FB1H103K	CHIP C	
C4		CE04LW1C470M	ELECTRØ	0.010UF K
C5		CK73FB1H223K	CHIP C	47UF 16WV
C6		CK73FB1E473K	CHIP C	0.022UF K
C7		CE04LW1H3R3M	ELECTRØ	0.047UF K
				3.3UF 50WV

4:KR-694
5:KR-V5560
6:KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
M:Other Areas
K:USA
T:England
X:Australia
Y:AAFE(Europe)
L:Scandinavia
Y:PX(Far East, Hawaii)
Y:AAFE(Europe)

Δ indicates safety critical components

PARTS LIST

No. 8

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Destination 仕向備考
X2			L78-0295-05	RESONATOR (19KHZ)	
R31			RS14KB30221J	FL-PROOF RS 220 J 2W	
R42			RO1ANB2E101J	RD 170 J 1/4W	
R111			RO1ANB2E101J	RD 470 J 1/4W	
R127, 128			RO1ANB2E101J	RD 100 J 1/4W	
VR1			R12-3685-05	TRIMMING POT. (22K)	
VR2			R12-3685-05	TRIMMING POT. (10K)	
VR3			R12-1619-05	TRIMMING POT. (4.7K)	
W100-103			P92-0670-05	CHIP R 0.0HM	
W200-211			P92-0679-05	CHIP R 0.0HM	
D3			HZS3.3N(02)	ZENER DIODE	
D4			RD5.1S(02)	ZENER DIODE	
D5			HZS3.3N(02)	ZENER DIODE	
D6			RD3.3ES(02)	ZENER DIODE	
D7			HSS104	DIODE	
D8			1SS133	DIODE	
D9			HZS104(B)	ZENER DIODE	
D10			RD10ES(B)	ZENER DIODE	
D11, 112			HSS104	DIODE	
D11, 112			1SS133	DIODE	
D117, 118			1SS268	DIODE	
D121			MA110	DIODE	
D125			MA110	DIODE	
IC1			LA1851N	IC(AM, FM TUNER)	
IC2			LC7218	IC(PLL SYNTHESIZER)	
IC3			NJM45650	IC(OP AMP X2)	
IC4			2SC93P	IC(OP AMP X2)	
Q1			2SC9714(R, W)	TRANSISTOR	
Q2			2SC1845(F, E)	TRANSISTOR	
Q3, 4			2SC2412K	TRANSISTOR	
Q5			2SA1037K	TRANSISTOR	
Q7, 8			2SC2412K	TRANSISTOR	
Q9			2SA1037K	TRANSISTOR	
Q10			2SC2412K	TRANSISTOR	
Q11			2S0863(E, F)	TRANSISTOR	
Q102			2SA1037K	TRANSISTOR	
Q109, 110			2SC2412K	TRANSISTOR	
Q111			2SA1037K	TRANSISTOR	
DT1			W02-1166-15	FM FRONT-END ASSY	
MAIN AMP UNIT(X07-277X-XX) : K,P,R type					
C1, 2			CA45FSL1H101J	CERAMIC 100PF J	
C3, 4			CA45FF1H103Z	CERAMIC 0.010UF J	
C7, 8			C992FM1H104J	MYLAR 0.100F J	
C9, -12			CA45FF1H103Z	CERAMIC 0.010UF J	
C13, 14			C992FM1H104J	MYLAR 0.100F J	
C17, 18			CA45FF1H103Z	CERAMIC 0.010UF J	
C21			CE04LW1021M	ELECTRO 220UF 5.3WV	
C22			CE04LW1V68M	ELECTRO 4.7UF 35WV	
C31, 32			CA45FF1H103Z	CERAMIC 0.010UF J	
C33, 34			C90-3536-05	ELECTRO 6800UF 71WV	6
C33, 34			C90-3536-05	ELECTRO 6800UF 63WV	4
C35			CE04LW1J100M	ELECTRO 100UF 6.3WV	5
					4

L:Scandinavia
 K:USA
 P:Canada
 R:Mexico
 T:England
 E:Europe
 G:Germany
 X:Australia
 M:Other Areas
 AAFS(Europe)

L:Scandinavia	K:USA	P:Canada	R:N.A.
Y:PX(Far East, Hawaii)	T:England	E:Europe	G:G.
Y:AAFES(Europe)	X:Australia	M:Other Areas	

KR-694/V5560/V6060

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.11

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
△ D28 ,29 △ D30 ,33 △ D31 ,32 △ D33 ,34 △ D34		ISS131 SS5688 1SR139-100 H256.2N(B2) RD6.2ES(B2)	DIODE DIODE ZENER DIODE ZENER DIODE		
D35 D36 D37 D38 D39 D40 D41		HSS104 ISS133 HSS104 ISS133 HSS104 ISS133 HSS104	DIODE DIODE DIODE DIODE DIODE DIODE DIODE		
D41 ,44 D45 ,52 D45 ,52 D53 ,56 D53 ,56		ISS131 H2513N(B2) RD13ES(B2) H255.1N(B2) RD5.1ES(B2)	DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE		
D58 ,59 D58 ,59 D60 ,61 D60 ,61 D62 ,63		HSS104 ISS133 H255.1N(B2) RD5.1ES(B2) HSS104	DIODE DIODE ZENER DIODE ZENER DIODE DIODE		
D62 ,63 Q1 ,6 Q7 Q8		ISS133 NM22790 2501845(F,E) 25A992(F,E) 25A1534A(R,S)	DIODE IC(V10E0 IC) TRANSISTOR TRANSISTOR TRANSISTOR		
△ Q9 ,10 △ Q9 ,10 △ Q9 ,10 Q11		25D2012 25D2061 25D2374 25C1740S(Q,R) 25C2785(F,E)	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR		
Q12 Q12 Q13 Q13 Q14		25A1175(F,E) 25A933S(Q,R) 25C1740S(Q,R) 25C2785(F,E) 25A1175(F,E)	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR		
Q14 Q21 ,23 Q21 ,23 Q24 Q24		25A933S(Q,R) 25C1740S(Q,R) 25C2785(F,E) 25C1740S(Q,R) 25C2785(F,E)	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR		6 6
△ Q25 Q26 Q31 Q31 Q32		25C3400A(R,S) 25C2003(L,K) 25A1175(F,E) 25A933S(Q,R) 25C1740S(Q,R)	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR		6 6 6 6 6
Q32 Q33 Q33 Q34 Q34		25C2785(F,E) 25A1175(F,E) 25A933S(Q,R) 25C1740S(Q,R) 25C2785(F,E)	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR		6 6 6 6 6
Q35 ,36 Q37 ,38 Q39 Q39 Q40		25C1845(F,E) 25A992(F,E) 25A1175(F,E) 25A933S(Q,R) 25C1740S(Q,R)	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR		6 6 6 6 6

4:KR-694
5:KR-V5560
6:KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
M:Other Areas
K:USA
T:England
Y:AFES(Europe)
X:Australia
L:Scandinavia
Y:PX(Far East, Hawaii)
Y:AFES(Europe)
X:Australia

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.10

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R25 ,28 R29 ,30 R31 ,32 R33 ,34 R55 ,56		RD14NB2E220J RS14KB3D4K7J RD14NB2E100J RD14NB2E332J SS14NB3A561J	22 J 1/4W FL-PROOF RS 4.7 J 2W 10 J 1/4W 3.3K J 1/4W FL-PROOF RS 5.6 J 1W		
△ R61 △ R62 △ R64 ,65 R71 △ R76		RD14NB2E100J RD14NB2E470J RS14KB3D151J RD14NB2E101J SS14KB3D271J	10 J 1/4W 47 J 1/4W 150 J 2W 100 J 1/4W 270 J 2W		
△ R78 ,79 △ R80 △ R81 △ R91 ,92 △ R119		RS14KB3D271J RD14NB2E180J RD14NB2E682J RD14NB2E470J R92-1769-05	270 J 2W 18 J 1/4W 6.8K J 1/4W 47 J 1/4W 3.3M J 1/2W		
△ R128 △ R170 ,171 △ VR1 ,4		RD14NB2E185J RS14KB3A391J R12-1817-05	1.5 J 1/4W 390 J 1W TRIMMING POT. (2.2K)		
K1 ,2 K1 ,2 K1 ,2 K1 ,2 K3		SS1-2078-05 SS1-2092-05 S76-0005-05 S76-0005-05 S76-0005-05	MAGNETIC RELAY MAGNETIC RELAY MAGNETIC RELAY MAGNETIC RELAY MAGNETIC RELAY		6 6 6 6 6
K4 K4 K5 S1		S76-0016-05 S76-0017-05 S76-0009-05 S31-2132-05	MAGNETIC RELAY MAGNETIC RELAY MAGNETIC RELAY SLIDE SWITCH		6 6 6 6
D1 ,5 D1 ,5 D6 D6 D7		HSS104A ISS131 H255.1N(B2) RD5.1ES(B2) DS5BA20F03	DIODE DIODE ZENER DIODE ZENER DIODE DIODE		
△ D7 D8 D8 D9 ,12 △ D9 ,12		RBV-602LFA SS5BA20F03 RBV-602LFA SS5BA20F03 1SR139-100	DIODE DIODE DIODE DIODE DIODE		6 6
D13 D13 D14 D14 D15		H256.2N(B2) RD6.2ES(B2) H258.2N(B2) RD8.2ES(B2) H252.7N(B2)	ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE		
△ D15 △ D16 ,17 △ D16 ,17 △ D18 ,19 △ D18 ,19		RD2.7ES(B2) SS5688 1SR139-100 H2516N(B2) RD16ES(B2)	ZENER DIODE DIODE DIODE ZENER DIODE ZENER DIODE		
D21 ,23 D21 ,23 D24 D24 D25 ,27		HSS104 ISS133 HSS104 ISS133 HSS104	DIODE DIODE DIODE DIODE DIODE		6 6 6 6 6
△ D25 ,27 △ D28 ,29		ISS133 HSS104A	DIODE DIODE		

4:KR-694
5:KR-V5560
6:KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
M:Other Areas
K:USA
T:England
Y:AFES(Europe)
X:Australia
L:Scandinavia
Y:PX(Far East, Hawaii)
Y:AFES(Europe)
X:Australia

KR-694/V5560/V6060 PARTS LIST

✕ New Parts
 Parts without Parts No. are not supplied.
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.
 Teile ohne Parts No. werden nicht geliefert.

No.13

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕	Re- marks 備考
C84		CK45FB1H471K	CERAMIC 470PF K		6
C85		CK45FB1H471K	CERAMIC 470PF K		
C86		CE04LW1A470M	ELECTRØ 470UF 10WV		
C91		CE04LW0J471M	ELECTRØ 470UF 6.3WV		
C92	.93	CK45FF1H103Z	CERAMIC 0.010UF Z		
C95	.96	CE04LW1V100M	ELECTRØ 10UF 35WV		
C99	.100	CC45ESLIH470J	47PF J		
C101	.103	CC45FF1H103Z	CERAMIC 0.010UF Z		
C104	.105	CC45FSLIH221J	CERAMIC 220PF J		
C106		CK45FF1H473Z	CERAMIC 0.047UF Z		
J3		E03-0117-05	AC ØUTLET		
J4		E70-0047-05	LOCK TERMINAL BOARD		Y
J5		E70-0046-05	LOCK TERMINAL BOARD		
J6		E11-0127-05	PHONE JACK		5
J6		E11-0127-05	PHONE JACK		4
J6		E11-0190-05	PHONE JACK		6
J7		E63-0069-15	PHONE JACK		
J8		E11-0188-05	MINIATURE PHONE JACK(2P)		
J11	.12	E03-0108-05	AC ØUTLET		ME
J11	.12	E03-0109-05	AC ØUTLET		T
F1		F05-3121-05	FUSE (SEMKØ) (250V T3.15AL)		TEX
F1	.2	F05-3121-05	FUSE (SEMKØ) (250V T3.15AL)		YM
F3		F05-2525-05	FUSE (SEMKØ) (250V T2.5AL)		MTE
F6		F06-1022-05	FUSE (SEMKØ) (250V TIAL)		
CN5	.6	J13-0075-05	FUSE CLIP		
CN7	.8	J13-0075-05	FUSE CLIP		
CN9	.10	J13-0075-05	FUSE CLIP		
CN11	.12	J11-0098-05	WIRE CLAMPER		
L1	.4	L39-0085-05	PHASE COMPENSATION COIL		
T1		L07-0865-05	POWER TRANSFORMER		YM
T1		L07-0866-05	POWER TRANSFORMER		TX
T1		L07-0867-05	POWER TRANSFORMER		E
J		N35-3008-46	BINDING HEAD MACHINE SCREW		
CP1	.2	R90-0840-05	RD 0.22 5W		4
CP3	.4	R90-0840-05	RD 0.22 5W		5
CP3	.4	R90-0840-05	RD 0.22 5W		6
R5	.8	R014NB2E220J	MULTIPLE RESISTØR 22 J 1/4W		
R9	.10	RS14KB3D47J	FL-PRØØF RS 4.7 J 2W		
R11	.12	R014NB2E100J	RD 10 J 1/4W		
R13	.14	R014NB2E332J	RD 3.3K J 1/4W		
R15	.16	R014NB2C112J	RD 1.1K J 1/6W		5
R15	.16	R014NB2C112J	RD 1.1K J 1/6W		4
R25	.28	R014NB2E220J	RD 22 J 1/4W		
R29	.30	RS14KB3D47J	FL-PRØØF RS 4.7 J 2W		
R31	.32	R014NB2E100J	RD 10 J 1/4W		
R33	.34	R014NB2E332J	RD 3.3K J 1/4W		
R35	.36	R014NB2C112J	RD 1.1K J 1/6W		5
R35	.36	R014NB2C112J	RD 1.1K J 1/6W		4
R55	.56	RS14KB3A561J	FL-PRØØF RS S60 J 1W		
R61		R014NB2E100J	RD 10 J 1/4W		
R62		R014NB2E470J	RD 47 J 1/4W		
R64	.65	RS14KB3D151J	FL-PRØØF RS 150 J 2W		

L:Scandinavia
 Y:PK(Far East, Hawaii)
 Y:AAFE(S(Europe))

K:USA
 T:England
 X:Australia

P:Canada
 E:Europe
 M:Other Areas

R:Mexico
 G:Germany

S:Singapore made
 W:Malaysia made

4:KR-694
 5:KR-V5560
 6:KR-V6060

indicates safety critical components

✕ New Parts
 Parts without Parts No. are not supplied.
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.
 Teile ohne Parts No. werden nicht geliefert.

No.12

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕	Re- marks 備考
Q40		2SC2785(F,E)	TRANSISTØR		6
Q41	.42	2SC1845(F,E)	TRANSISTØR		
Q43	.44	2SA992C(F,E)	TRANSISTØR		
Q101	.102	2SD2222BT	TRANSISTØR		4
Q101	.102	2SD2225BT	TRANSISTØR		5
Q101	.102	2SD2255BT	TRANSISTØR		5
Q103	.104	2SB1470BT	TRANSISTØR		6
Q103	.104	2SB1493BT	TRANSISTØR		4
Q103	.104	2SB1493BT	TRANSISTØR		5
Q105	.106	2SC4137F19(V,W)	TRANSISTØR		
Q107	.108	2SD2255BT	TRANSISTØR		
Q109	.110	2SB1493BT	TRANSISTØR		
Q111	.112	2SC4137F19(V,W)	TRANSISTØR		
MAIN AMP UNIT(XØ7-278X-XX) : Y,M,X,E,T type					
C1	.2	CC45FSLIH101J	100PF J		
C3	.4	CK45FF1H103Z	CERAMIC 0.010UF Z		
C5	.8	CF92FV1H24J	MF 0.22UF J		E
C7	.8	CQ92FM1H104J	MYLAR 0.10UF J		YMTX
C9	.12	CK45FF1H103Z	CERAMIC 0.010UF Z		
C13	.16	CF92FV1H24J	MF 0.22UF J		E
C13	.14	CQ92FM1H104J	MYLAR 0.10UF J		YMTX
C17	.18	CK45FF1H103Z	CERAMIC 0.010UF Z		
C19	.20	CC45FSLIH561J	CERAMIC 560PF J		E
C21		CE04LW0J221M	ELECTRØ 220UF 6.3WV		
C22		CE04LW1V47M	ELECTRØ 4.7UF 35WV		
C31	.32	CK45FF1H103Z	CERAMIC 0.010UF Z		
C33	.34	C90-3538-05	ELECTRØ 6800UF 71WV		6
C33	.34	C90-3538-05	ELECTRØ 6800UF 63WV		4
C33	.34	C90-3538-05	ELECTRØ 6800UF 63WV		5
C35		CE04LW1J100M	ELECTRØ 10UF 63WV		4
C35		CE04LW1J100M	ELECTRØ 10UF 63WV		5
C35		CE04LW2A100M	ELECTRØ 10UF 100WV		6
C36		CE04LW1J331M	ELECTRØ 330UF 63WV		4
C36		CE04LW1J331M	ELECTRØ 330UF 63WV		5
C36		CE04LW2A331M	ELECTRØ 330UF 100WV		6
C39	.40	CK45FB1H102K	CERAMIC 1000UF 35WV		
C41	.45	CE04LW1C470M	ELECTRØ 47UF 16WV		
C46		CK45FF1H103Z	CERAMIC 0.010UF Z		
C47	.48	CK45FF2H104P	CERAMIC 0.010UF P		
C49		CK45FF1H103Z	CERAMIC 0.010UF Z		E
C50		CE04LW1J221M	ELECTRØ 220UF 63WV		
C51		CE04LW1V100M	ELECTRØ 10UF 35WV		
C52		CK45FF1H103Z	CERAMIC 0.010UF Z		E
C59	.16	C91-1488-05	MF 6800PF 250VAC		
C60		CK45FF1H103Z	CERAMIC 0.010UF Z		
C61		CE04LW1E331M	ELECTRØ 330UF 25WV		
C62	.63	CE04LW1A470M	ELECTRØ 47UF 10WV		
C65		CE04LW1V47M	ELECTRØ 4.7UF 35WV		
C70		CK45FF1H103Z	CERAMIC 0.010UF Z		
C71	.74	CK45FB1H102K	CERAMIC 1000UF K		
C75	.79	CK45FF1H472Z	4700PF Z		E
C81		CK45FF1H472Z	4700PF Z		E
C83		CK45FF1H103Z	CERAMIC 0.010UF Z		

L:Scandinavia
 Y:PK(Far East, Hawaii)
 Y:AAFE(S(Europe))

K:USA
 T:England
 X:Australia

P:Canada
 E:Europe
 M:Other Areas

R:Mexico
 G:Germany

S:Singapore made
 W:Malaysia made

4:KR-694
 5:KR-V5560
 6:KR-V6060

indicates safety critical components

KR-694/V5560/V6060

PARTS LIST

No.15

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 国番号
D37 -40		ISS133	DIODE	
D41 -44		HSS104A	DIODE	
D45 -52		ISS131	DIODE	
D45 -52		HZS13N(B2)	ZENER DIODE	
D45 -52		RD13ES(B2)	ZENER DIODE	
D53 -56		HZS5.1N(B2)	ZENER DIODE	
D53 -56		RD5.1ES(B2)	ZENER DIODE	
D58 -59		HSS104	DIODE	
D58 -59		ISS133	DIODE	
D60 -61		HZS5.1N(B2)	ZENER DIODE	
D60 -61		RD5.1ES(B2)	ZENER DIODE	
D62 -63		HSS104	DIODE	
D62 -63		ISS133	DIODE	
IC1		NJM2279D	IC(VIDE0 IC)	
Q1 -6		2SC1845(F,E)	TRANSISTOR	
Q7		2SA992(F,E)	TRANSISTOR	
Q8		2SA1534A(R,S)	TRANSISTOR	
Q9 -10		2SD2012	TRANSISTOR	
Q9 -10		2SD2061	TRANSISTOR	
Q9 -10		2SD2374	TRANSISTOR	
Q11		2SC1740S(Q,R)	TRANSISTOR	
Q11		2SC2785(F,E)	TRANSISTOR	
Q12		2SA1175(F,E)	TRANSISTOR	
Q12		2SA935(Q,R)	TRANSISTOR	
Q13		2SC1740S(Q,R)	TRANSISTOR	
Q13		2SC2785(F,E)	TRANSISTOR	
Q14		2SA1175(F,E)	TRANSISTOR	
Q14 -23		2SA935(Q,R)	TRANSISTOR	
Q21 -23		2SC1740S(Q,R)	TRANSISTOR	
Q21 -23		2SC2785(F,E)	TRANSISTOR	
Q24		2SC1740S(Q,R)	TRANSISTOR	
Q24		2SC2785(F,E)	TRANSISTOR	
Q25		2SC3940A(R,S)	TRANSISTOR	
Q26		2SC2003(L,N)	TRANSISTOR	
Q31		2SA1175(F,E)	TRANSISTOR	
Q31		2SA935(Q,R)	TRANSISTOR	
Q32		2SC1740S(Q,R)	TRANSISTOR	
Q32		2SC2785(F,E)	TRANSISTOR	
Q33		2SA1175(F,E)	TRANSISTOR	
Q33		2SA935(Q,R)	TRANSISTOR	
Q34		2SC1740S(Q,R)	TRANSISTOR	
Q34		2SC2785(F,E)	TRANSISTOR	
Q35 -36		2SC1845(F,E)	TRANSISTOR	
Q37 -38		2SA992(F,E)	TRANSISTOR	
Q39		2SA1175(F,E)	TRANSISTOR	
Q39		2SA935(Q,R)	TRANSISTOR	
Q40		2SC1740S(Q,R)	TRANSISTOR	
Q40		2SC2785(F,E)	TRANSISTOR	
Q41 -42		2SC1845(F,E)	TRANSISTOR	
Q43 -44		2SA992(F,E)	TRANSISTOR	
Q101,102		2SD2228T	TRANSISTOR	
Q101,102		2SD2258T	TRANSISTOR	
Q103,104		2SB14706T	TRANSISTOR	
Q103,104		2SB14936T	TRANSISTOR	

4:KR-694
5:KR-V5560
6:KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
T:England
Y:AFES(Europe)
K:Australia
M:Other Areas
indicates safety critical components

No.14

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 国番号
R71		RD14NB2E101J	100 J 1/4W	
R76		RS14KB30271J	270 J 2W	
R77		FL-PROOF RS	270 J 2W	
R78 ,79		FL-PROOF RS	270 J 2W	
R80		RD14NB2E180J	18 J 1/4W	
R81		RD	6.8K J 1/4W	
R91 ,92		RD14NB2E470J	47 J 1/4W	
R128		RD14NB2E185J	1.5 J 1/4W	
R170,171		FL-PROOF RS	390 J 1W	
V81 -4		TRIMMING POT.(2.2K)		
K1 -2		MAGNETIC RELAY		
K1 -2		MAGNETIC RELAY		
K1 -2		MAGNETIC RELAY		
K1 -2		MAGNETIC RELAY		
K3		MAGNETIC RELAY		
K4		MAGNETIC RELAY		
K4		MAGNETIC RELAY		
K5		MAGNETIC RELAY		
S1		SLIDE SWITCH		
S2		SLIDE SWITCH		
D1 -5		HSS104A	DIODE	
D1 -5		ISS131	DIODE	
D6		HZS5.1N(B2)	ZENER DIODE	
D6		RD5.1ES(B2)	ZENER DIODE	
D7		D5SBA20F03	DIODE	
D7		RVV-602LFA	DIODE	
D8		D5SBA20F03	DIODE	
D9 -12		RVV-602LFA	DIODE	
D9 -12		S5688B	DIODE	
D13		1SR139-100	DIODE	
D13		HZS6.2N(B2)	ZENER DIODE	
D13		RD6.2ES(B2)	ZENER DIODE	
D14		HZS6.2N(B2)	ZENER DIODE	
D14		RD6.2ES(B2)	ZENER DIODE	
D15		HZS2.7N(B2)	ZENER DIODE	
D15		RD2.7ES(B2)	ZENER DIODE	
D16 -17		S5688B	DIODE	
D16 -17		1SR139-100	DIODE	
D18 -19		HZS16N(B2)	ZENER DIODE	
D18 -19		RD16ES(B2)	ZENER DIODE	
D21 -23		HSS104	DIODE	
D21 -23		ISS133	DIODE	
D24		HSS104	DIODE	
D24		ISS133	DIODE	
D25 -27		ISS133	DIODE	
D25 -27		ISS104A	DIODE	
D28 -29		HSS104	DIODE	
D28 -29		ISS131	DIODE	
D30 -33		S5688B	DIODE	
D30 -33		1SR139-100	DIODE	
D34		HZS6.2N(B2)	ZENER DIODE	
D34		RD6.2ES(B2)	ZENER DIODE	
D35		HSS104	DIODE	
D35		ISS133	DIODE	
D37 -40		HSS104	DIODE	

4:KR-694
5:KR-V5560
6:KR-V6060
S:Singapore made
W:Malaysia made
R:Mexico
G:Germany
P:Canada
E:Europe
T:England
Y:AFES(Europe)
K:Australia
M:Other Areas
indicates safety critical components

KR-694/V5560/V6060

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles sans numéro de pièce ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.17

Ref. No. 参照番号	Address 位 置	Parts No. 部品番号	Description 部 品 名 / 規 格	Desti- nation 仕 向	Remarks 備考
C79, 82		CE04LW1V100M	ELECTR0 100F 35WV		
C83		CE04LW1A221M	ELECTR0 220UF 10WV		
C84		C092FM1H473J	MYLAR 0.047UF J		
C85		C092FM1H223J	MYLAR 0.022UF J		
C86		CE04LW1C470M	ELECTR0 47UF 16WV		
C87		CE04LW1A101M	ELECTR0 100UF 10WV		
C89		CK45FBIH102K	CERAMIC 1000PF K		
C91		CK45FBIH232	CERAMIC 0.022UF Z		
C92		CE04LW1C470M	ELECTR0 47UF 16WV		
C93		C092FM1H104J	MYLAR 0.100UF J		
C95		C91-0757-05	CERAMIC 1000PF K		
C96		CF92FV1H481J	MF 480PF J		
C97, 98		CE04LW1V200M	ELECTR0 100F 35WV		
C99, 100		CE04LW1H010M	ELECTR0 1.00F 50WV		
C101, 102		C91-0749-05	CERAMIC 220PF K		
C103, 104		C91-0729-05	CERAMIC 22PF J		
C105, 106		C91-0745-05	CERAMIC 100PF K		
C107, 108		C91-0737-05	CERAMIC 47PF J		
C109, 110		CE04LW1V100M	ELECTR0 100F 35WV		
C120		C91-0755-05	CERAMIC 680PF K		
C121, 122		C91-0735-05	CERAMIC 39PF J		
C123, 124		CE04LW1V100M	ELECTR0 100F 35WV		
C125, 126		C91-0749-05	CERAMIC 220PF K		
C127, 128		CE04LW1A101M	ELECTR0 100UF 10WV		
C129, 130		C91-0757-05	CERAMIC 1000PF K		
C131, 132		C092FM1H123J	MYLAR 0.012UF J		
C133, 134		C092FM1H332J	MYLAR 3300PF J		
C135, 136		CE04LW1V47M	ELECTR0 4.7UF 35WV		
C137, 138		C91-0745-05	CERAMIC 100PF K		
C139		CF92FV1H2A103J	MYLAR 0.010UF J		
C151		C90-3253-05	ELECTR0 1UF 50WV		
C152		CE04LW1H010M	ELECTR0 1.00F 50WV		
C153, 154		CC45FSLIH221J	CERAMIC 220PF J		
C155-158		CC45FSLIH101J	CERAMIC 100PF J		
C159		C90-3222-05	ELECTR0 100UF 10WV		
C160		CE04LW1A101M	ELECTR0 100UF 10WV		
C161, 162		CC45FSLIH100D	CERAMIC 10PF D		
C163, 164		CE04LW2A010M	ELECTR0 1.00F 100WV		
C165, 166		CC45FSLIH221J	CERAMIC 220PF J		
C167, 168		CC45FSLIH020C	CERAMIC 2.0PF C		
C169, 170		CC45FSLIH070C	CERAMIC 7.0PF C		
C171, 172		CC45FSLIH330J	CERAMIC 33PF J		
C173		CE04LW1C470M	ELECTR0 47UF 16WV		
C181		CE04LW1C220M	ELECTR0 22UF 16WV		
C181, 182		CE04LW1H010M	ELECTR0 1.00F 50WV		
C183, 184		CC45FSLIH221J	CERAMIC 220PF J		
C185-188		CC45FSLIH101J	CERAMIC 100PF J		
C189, 190		CE04LW1A470M	ELECTR0 47UF 10WV		
C191, 192		CC45FSLIH680J	CERAMIC 68PF J		
C193, 194		CC45FSLIH221J	CERAMIC 220PF J		
C195, 196		CC45FSLIH020C	CERAMIC 2.0PF C		
C197, 198		CC45FSL2H680J	CERAMIC 68PF J		
C200		CE04LW1C220M	ELECTR0 22UF 16WV		
C201, 202		CE04LW1V100M	ELECTR0 100F 35WV		
C203, 204		C092FM1H333J	MYLAR 0.033UF J		

L:Scandinavia
Y:YK(Far East, Hawaii)
Y:YAFES(Europe)

K:USA
T:England
X:Australia

P:Canada
E:Europe
M:Other Areas

R:Mexico
G:Germany

S:Singapore made
W:Malaysia made

4:KR-694
5:KR-V5560
6:KR-V6060

△ indicates safety critical components

* New Parts
Parts without Parts No. are not supplied.
Les articles sans numéro de pièce ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.16

Ref. No. 参照番号	Address 位 置	Parts No. 部品番号	Description 部 品 名 / 規 格	Desti- nation 仕 向	Remarks 備考
Q103, 104		Z5B1493BT	TRANSISTOR		
Q105, 106		Z5C4137F19(V, W)	TRANSISTOR		
Q107, 108		Z5D2255BT	TRANSISTOR		
Q109, 110		Z5B1493BT	TRANSISTOR		
Q111, 112		Z5C4137F19(V, W)	TRANSISTOR		
AUDIO UNIT(X09-394X-XX)					
C1, 4		C91-0749-05	CERAMIC 220PF K		
C5, 6		C91-0749-05	CERAMIC 220PF K		
C7, 8		C91-0749-05	CERAMIC 220PF K		
C9, 10		C91-0749-05	CERAMIC 220PF K		
C11, 12		C91-0749-05	CERAMIC 220PF K		
C13, 14		C91-0749-05	CERAMIC 220PF K		
C15, 16		C91-0749-05	CERAMIC 220PF K		
C17, 18		CE04LW1H010M	ELECTR0 1.00F 50WV		
C19, 20		C91-0749-05	CERAMIC 220PF K		
C21, 22		C91-0729-05	CERAMIC 22PF J		
C23, 24		CE04LW1C220M	ELECTR0 22UF 16WV		
C25, 26		CE04LW1C470M	ELECTR0 47UF 16WV		
C27, 28		CC45FSLIH101J	CERAMIC 100PF J		
C29		CK45FFIH4722	CERAMIC 4700PF Z		
C30, 31		CK45FFIH1032	CERAMIC 0.010UF Z		
C32, 33		CE04LW1C220M	ELECTR0 22UF 16WV		
C34		CK45FBIH102K	CERAMIC 1000PF K		
C41		C092FM1H103J	MYLAR 0.010UF J		
C42		C092FM1H222J	MYLAR 2200PF J		
C43		CE04LW1A221M	ELECTR0 220UF 10WV		
C44		C092FM1H333J	MYLAR 0.033UF J		
C45		C092FM1H152J	MYLAR 1500PF J		
C46		C092FM1H333J	MYLAR 0.033UF J		
C47		CF92FV1H105J	MF 1.00F J		
C48		CE04LW1A221M	ELECTR0 220UF 10WV		
C49		CE04LW1V100M	ELECTR0 100F 35WV		
C50		CE04LW1H2R2M	ELECTR0 2.2UF 50WV		
C51		CE04LW1V100M	ELECTR0 100F 35WV		
C53		CE04LW1V100M	ELECTR0 100F 35WV		
C55		CF92FV1H824J	MF 0.82UF J		
C56		CF92FV1H474J	MF 0.47UF J		
C57		CE04LW1A470M	ELECTR0 47UF 10WV		
C58, 59		C092FM1H404J	MYLAR 0.10UF J		
C60		CE04LW1H47M	ELECTR0 0.47UF 50WV		
C61		CE04LW1V47M	ELECTR0 4.7UF 35WV		
C62		CE04LW1H47M	ELECTR0 0.47UF 50WV		
C63		CE04LW1V47M	ELECTR0 4.7UF 35WV		
C64		CF92FV1H154J	MF 0.15UF J		
C65		CE04LW1H3R3M	ELECTR0 3.3UF 50WV		
C66, 67		CF92FV1H154J	MF 0.15UF J		
C68		CE04LW1H3R3M	ELECTR0 3.3UF 50WV		
C69		CF92FV1H154J	MF 0.15UF J		
C70		CE04LW1V47M	ELECTR0 4.7UF 35WV		
C71		CE04LW1H47M	ELECTR0 0.47UF 50WV		
C72		CE04LW1V47M	ELECTR0 4.7UF 35WV		
C73		CE04LW1H47M	ELECTR0 0.47UF 50WV		
C74, 75		C092FM1H104J	MYLAR 0.10UF J		
C76, 77		CE04LW1H010M	ELECTR0 1.00F 50WV		
C78		CE04LW1A221M	ELECTR0 220UF 10WV		

L:Scandinavia
Y:YK(Far East, Hawaii)
Y:YAFES(Europe)

K:USA
T:England
X:Australia

P:Canada
E:Europe
M:Other Areas

R:Mexico
G:Germany

S:Singapore made
W:Malaysia made

4:KR-694
5:KR-V5560
6:KR-V6060

△ indicates safety critical components

KR-694/V5560/V6060

PARTS LIST

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.21

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
IC1		UPD78044GF-075	NI-COM IC	TE	
IC2		S-80740AL	IC(VOLTAGE DETECTOR).		
IC3		NM4580D-D	IC(OP AMP X2)		
Q1 ,2		2SC1740S(Q,R)	TRANSISTOR		
Q1 ,2		2SC778S(F,E)	TRANSISTOR		
Q3		2SA117S(F,E)	TRANSISTOR	YM	
Q3		2SA933S(Q,R)	TRANSISTOR	YM	
Q5 ,6		2SC1740S(Q,R)	TRANSISTOR		
Q5 ,6		2SC278S(F,E)	TRANSISTOR		
Q7		2SC164S(F,E)	TRANSISTOR		
Q8		DTA124LS	DIGITAL TRANSISTOR		
Q8		UN4112	TRANSISTOR		
Q9		DTC124ES	DIGITAL TRANSISTOR		
Q9		UN4212	TRANSISTOR		
A1		W02-1046-05	ELECTRIC CIRCUIT MODULE		
A1		W02-1153-05	ELECTRIC CIRCUIT MODULE		
A1		W02-1174-05	ELECTRIC CIRCUIT MODULE		

4-KR-694
5-KR-V5560
6-KR-V6060
S:Singapore made
W:Malaysia made
P:Canada
R:Mexico
E:Europe
G:Germany
T:England
X:Australia
M:Other Areas
△ indicates safety critical components

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No.20

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C7		C90-3211-05	ELECTR0		
C8		CE04LW1H30M	ELECTR0		
C9		C91-0769-05	CERAMIC		
C10		C91-0765-05	0.020UF K		
C11		C91-0769-05	0.010UF K		
C12 ,13		C092FM1H023J	MYLAR		
C12		C90-3212-05	0.022UF J		
C15		C91-0769-05	470UF J		
C15		C91-0769-05	0.010UF K		
C21 ,22		CC40FSLH22J	CERAMIC		
C23 ,24		CE04LW1H30M	ELECTR0		
C25 ,26		C092FM1H563J	MYLAR		
C27		CE04LW1H010M	ELECTR0		
C28		C90-3228-05	470UF J		
C29 ,30		C91-0737-05	CERAMIC		
C31 ,32		C91-0754-05	560PF J		
C33		C90-3253-05	1UF		
C37 ,38		C90-3224-05	4.7UF		
C39		C90-3225-05	100UF		
C40		CE04LW1V100M	ELECTR0		
C41 ,42		CE92FV1H393J	MF		
C43 ,44		CE04LW1E470M	ELECTR0		
X1		78-0267-05	470UF J 25WV		
CP1		990-0292-05	RESONATOR (4.194MHZ)		
CP2		990-0832-05	MULTI-COMP 100KX8 J 1/6W		
CP4		990-0832-05	MULTI-COMP 4.7KX3 J 1/6W		
922 ,23		990-0856-05	MULTI-COMP 10KX5 J 1/6W		
969 ,70		9014NB2E121J	220 J 1/4W		
VR1 ,2		9014NB2E121J	120 J 1/4W		
S1 -35		R10-5076-05	POTENTIOMETER(100K X2)		
S36 -38		S40-1064-05	PUSH SWITCH	TE	
S40		S40-1064-05	PUSH SWITCH		
D1 -20		T99-0547-05	ENCODER (INPUT SELECTOR)		
D1		HSS104	DIODE		
D1		HSS133	DIODE		
D25		H256-2N(B2)	ZENER DIODE		
D25		H06-2ES(B2)	ZENER DIODE		
D26		H252-7N(B2)	ZENER DIODE		
D26		H02-7ES(B2)	ZENER DIODE		
D27		HZS11N(B2)	ZENER DIODE		
D32		H011ES(B2)	ZENER DIODE		
D32		HSS104	DIODE		
D32		HSS133	DIODE		
D33		HSS104	DIODE		
D33		HSS133	DIODE		
D34		HSS104	DIODE		
D34		HSS133	DIODE		
D35		HSS104	DIODE		
D35		HSS133	DIODE		
D36		HSS104	DIODE		
D36		HSS133	DIODE		
E01		11-MT-926K	INDICATOR TUPE		
IC1		UPD78043GF-073	NI-COM IC		

4-KR-694
5-KR-V5560
6-KR-V6060
S:Singapore made
W:Malaysia made
P:Canada
R:Mexico
E:Europe
G:Germany
T:England
X:Australia
M:Other Areas
△ indicates safety critical components

KR-694/V5560/V6060

SPECIFICATIONS

For U.S.A and Canada (KR-694/V5560)

Audio section

Rated power output at the STEREO operation

70 watts per channel minimum RMS, both channels driven at 8 Ω , from 20 Hz to 20,000 Hz with no more than 0.06 % total harmonic distortions. (FTC)

Power output at the Surround operation

Front (1 kHz, 0.9 % T.H.D. at 8 Ω) 70 W + 70 W
Center (1 kHz, 0.9 % T.H.D. at 8 Ω) 70 W
Rear (1 kHz, 0.9 % T.H.D. at 8 Ω) 20 W + 20 W

Total harmonic distortion (1 kHz, 8 Ω) 0.03 % at 50 W

Signal to noise ratio (IHF A)

PHONO (MM) 75 dB
CD, TAPE, VIDEO 100 dB

Input sensitivity / impedance

PHONO (MM) 2.5 mV / 47 k Ω
CD, TAPE, VIDEO 200 mV / 47 k Ω

Tone controls

BASS ± 10 dB (at 100 Hz)
TREBLE ± 10 dB (at 10 kHz)
Loudness control at - 30 dB level + 6 dB (100 Hz)

Video section

VIDEO inputs / outputs (Composite) 1 Vp - p / 75 Ω

FM Tuner section

Tuning frequency range 87.5 MHz ~ 108 MHz
Usable sensitivity (IHF) 13.2 dBf (1.2 μ V at 75 Ω)
50 dB quieting sensitivity
STEREO 41.2 dBf (3.2 μ V at 75 Ω)
Total harmonic distortion at 1 kHz
MONO 0.6 %
STEREO 0.7 %
Signal to noise ratio at 65 dBf (IHF)
MONO 75 dB
STEREO 68 dB
Selectivity (IHF \pm 400 kHz) 50 dB
Stereo separation (IHF at 1 kHz) 40 dB
Frequency response 30 Hz ~ 15 kHz, + 0.5 dB, - 3.0 dB

AM Tuner section

Tuning frequency range 530 kHz ~ 1,700 kHz
Usable sensitivity 12 μ V / (500 μ V / m)
Total harmonic distortion 0.7 %
Signal to noise ratio 48 dB
Selectivity 30 dB

General

Power consumption 3 A
AC outlet
SWITCHED 2: (total 200 W, 1.6 A max.)
Dimensions W: 440 mm (17-5/16")
H: 143 mm (5-5/8")
D: 334 mm (13-1/8")
Weight (net) 9.5 kg (20.9 lb)

For other countries (KR-694/V5560)

Audio section

Rated power output at the STEREO operation

(EIAJ) 1 kHz, 10 % T.H.D., at 8 Ω 100 W + 100 W
(IHF '66) from 20 Hz to 20 kHz,
0.06 % T.H.D., at 8 Ω 70 W + 70 W

Power output at the Surround operation

Front (1 kHz, 0.9 % T.H.D. at 8 Ω) 70 W + 70 W
Center (1 kHz, 0.9 % T.H.D. at 8 Ω) 70 W
Rear (1 kHz, 0.9 % T.H.D. at 8 Ω) 20 W + 20 W
Total harmonic distortion (1 kHz, 8 Ω) 0.03 % at 50 W

Signal to noise ratio (IHF '66)

PHONO (MM) 75 dB
CD, TAPE, VIDEO 100 dB

Input sensitivity / impedance

PHONO (MM) 2.5 mV / 47 k Ω
CD, TAPE, VIDEO 200 mV / 47 k Ω

Tone controls

BASS ± 10 dB (at 100 Hz)
TREBLE ± 10 dB (at 10 kHz)
Loudness control at - 30 dB level + 6 dB (100 Hz)

Video section

VIDEO inputs / outputs (Composite) 1 Vp - p / 75 Ω

FM Tuner section

Tuning frequency range 87.5 MHz ~ 108 MHz
Usable sensitivity (IHF) 13.2 dBf (1.2 μ V at 75 Ω)
50 dB quieting sensitivity
STEREO 41.2 dBf (3.2 μ V at 75 Ω)
Total harmonic distortion at 1 kHz
MONO 0.6 %
STEREO 0.7 %
Signal to noise ratio at 65 dBf (IHF)
MONO 75 dB
STEREO 68 dB
Selectivity (IHF \pm 400 kHz) 50 dB
Stereo separation (IHF at 1 kHz) 40 dB
Frequency response 30 Hz ~ 15 kHz, + 0.5 dB, - 3.0 dB

AM Tuner section

Tuning frequency range
9 kHz 531 kHz ~ 1,602 kHz
10 kHz 530 kHz ~ 1,610 kHz
Usable sensitivity 12 μ V / (500 μ V / m)
Total harmonic distortion 0.7 %
Signal to noise ratio 48 dB
Selectivity 30 dB

General

Power consumption 260 W
AC outlet
SWITCHED 2: (total 200 W max.)
(Except for Australia)
Dimensions W: 440 mm
H: 143 mm
D: 334 mm
Weight (net) 9.5 kg

Note : KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

KR-694/V5560/V6060

SPECIFICATIONS

U.S.A., Mexico and Canada(KR-V6060)

Audio section

Rated power output at the STEREO operation

100 watts per channel minimum RMS, both channels driven at 8 Ω , from 20 Hz to 20,000 Hz with no more than 0.06% total harmonic distortions. (FTC)

Power output at the Surround operation

Front (1 kHz, 0.9% T.H.D. at 8 Ω) 70 W + 70 W
Center (1 kHz, 0.9% T.H.D. at 8 Ω) 70 W
Rear (1 kHz, 0.9% T.H.D. at 8 Ω) 20 W + 20 W

Total harmonic distortion (1 kHz, 8 Ω) 0.03% at 50 W

Signal to noise ratio (IHF A)

PHONO (MM) 75 dB
CD, TAPE, VIDEO 100 dB

Input sensitivity / impedance

PHONO (MM) 2.5 mV / 47 k Ω
CD, TAPE, VIDEO 200 mV / 47 k Ω

Tone controls

BASS ± 10 dB (at 100 Hz)
TREBLE ± 10 dB (at 10 kHz)
Loudness control at - 30 dB level + 8 dB (100 Hz)

Video section

VIDEO inputs / outputs(Composite) 1 Vp-p / 75 Ω

FM Tuner section

Tuning frequency range 87.5 MHz~108 MHz
Usable sensitivity (IHF) 13.2 dBf (1.2 μ V at 75 Ω)
50 dB quieting sensitivity
STEREO 41.2 dBf (3.2 μ V at 75 Ω)
Total harmonic distortion at 1 kHz
MONO 0.6%
STEREO 0.7%
Signal to noise ratio at 65 dBf (IHF)
MONO 75 dB
STEREO 68 dB
Selectivity (IHF ± 400 kHz) 50 dB
Stereo separation (IHF at 1 kHz) 40 dB
Frequency response 30 Hz~15 kHz, +0.5 dB, - 3.0 dB

AM Tuner section

Tuning frequency range 530 kHz~1,700 kHz
Usable sensitivity 12 μ V / (500 μ V / m)
Total harmonic distortion 0.7 %
Signal to noise ratio 48 dB
Selectivity 30 dB

General

Power consumption 3 A
AC outlet
SWITCHED 2: (total 200 W, 1.6 A max.)
Dimensions W: 440 mm (17-5/16")
H: 143 mm (5-5/8")
D: 334 mm (13-1/8")
Weight (net) 9.5 kg (20.9 lb)

Other countries(KR-V6060)

Audio section

Rated power output at the STEREO operation

(EIAJ) 1 kHz, 10 % THD at 8 Ω 135 W + 135 W
(IHF '66) from 20 Hz to 20 kHz,
0.06% T.H.D., at 8 Ω 100 W + 100 W

Power output at the Surround operation

Front (1 kHz, 0.9% T.H.D. at 8 Ω) 70 W + 70 W
Center (1 kHz, 0.9% T.H.D. at 8 Ω) 70 W
Rear (1 kHz, 0.9% T.H.D. at 8 Ω) 20 W + 20 W

Total harmonic distortion (1 kHz, 8 Ω) 0.03% at 50 W

Signal to noise ratio (IHF'66)

PHONO (MM) 75 dB
CD, TAPE, VIDEO 100 dB

Input sensitivity / impedance

PHONO (MM) 2.5 mV / 47 k Ω
CD, TAPE, VIDEO 200 mV / 47k Ω

Tone controls

BASS ± 10 dB (at 100 Hz)
TREBLE ± 10 dB (at 10 kHz)

Loudness control at - 30 dB level + 8 dB (100 Hz)

Video section

VIDEO inputs / outputs(Composite) 1 Vp-p / 75 Ω

FM Tuner section

Tuning frequency range 87.5 MHz~108 MHz
Usable sensitivity (IHF) 13.2 dBf (1.2 μ V at 75 Ω)
50 dB quieting sensitivity
STEREO 41.2 dBf (3.2 μ V at 75 Ω)
Total harmonic distortion at 1 kHz
MONO 0.6 %
STEREO 0.7 %
Signal to noise ratio at 65 dBf (IHF)
MONO 75 dB
STEREO 68 dB
Selectivity (IHF ± 400 kHz) 50 dB
Stereo separation (IHF at 1 kHz) 40 dB
Frequency response 30 Hz ~ 15 kHz, + 0.5 dB, - 3.0 dB

AM Tuner section

Tuning frequency range
9 kHz 531 kHz ~ 1,602 kHz
10 kHz 530 kHz ~ 1,610 kHz
Usable sensitivity 12 μ V / (500 μ V / m)
Total harmonic distortion 0.7 %
Signal to noise ratio 48 dB
Selectivity 30 dB

General

Power consumption 260 W
AC outlet
SWITCHED 2: (total 200 W max.)
(Except for Australia)
Dimensions W: 440 mm
H: 143 mm
D: 334 mm
Weight (net) 9.5 kg

Note : KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

KR-694/V5560/V6060

KENWOOD CORPORATION

Alive Mitake, 2-5, 1-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

KENWOOD SERVICE CORPORATION

P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O. BOX 55-2791, Piso 6 Plaza Chase, Cl. 47 y Aquilino de la Guardia, Panama, Republic de Panama

TRIO-KENWOOD U.K. LIMITED

Kenwood House, Dwight Road, Watford, Herts, WD1 8EB, United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.

Mecheisesteenweg 418 B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 63150 Heusenstamm, Germany

TRIO-KENWOOD FRANCE S.A.

13 Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129 Milano, Italy

KENWOOD ESPANA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (A.C.N. 001 499 074)

P.O. BOX 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Unit 3712-3724, Level 37 Tower 1, Metroplaza, 223 Hing Fong Road,

Kwai Fong N.T. Hong Kong

KENWOOD ELECTRONICS SINGAPORE PTE LTD

No. 1 Genting Lane #07-00, Singapore, 1334